




Declassified and Released by the NRO

In Accordance with E. O. 12958

on NOV 26 1997

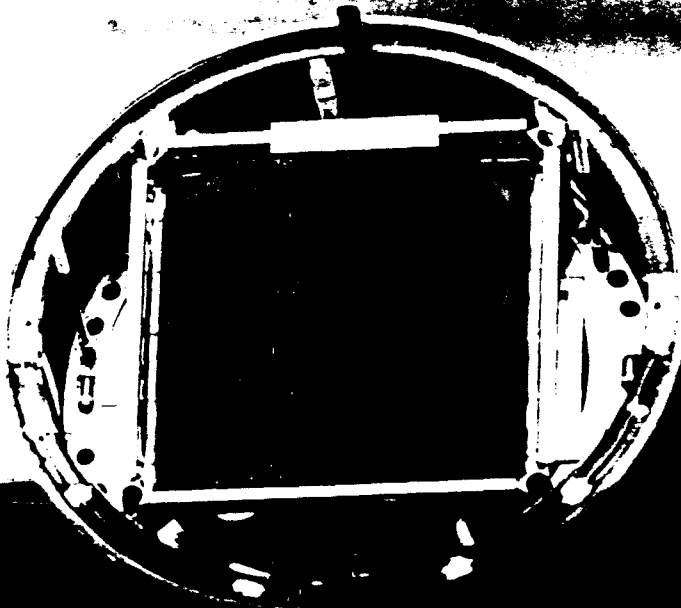


+Z YAW

ROLL
AXIS
+X




THRUST CONE

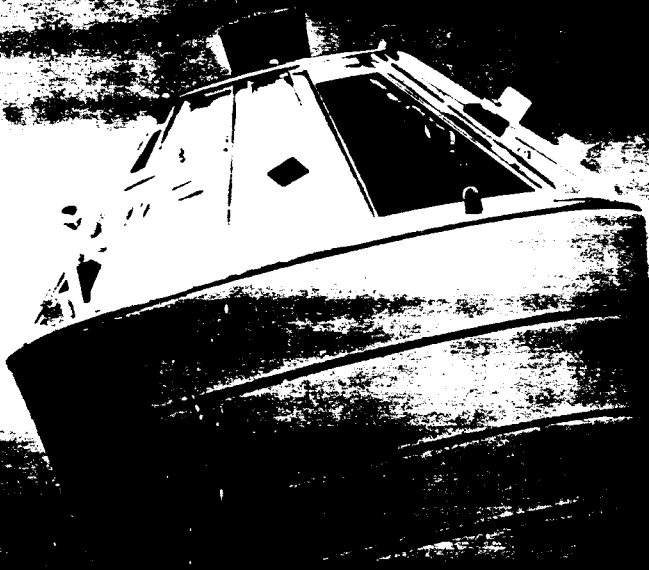

+Y PITCH


ROLL
AXIS
+X


+Z YAW

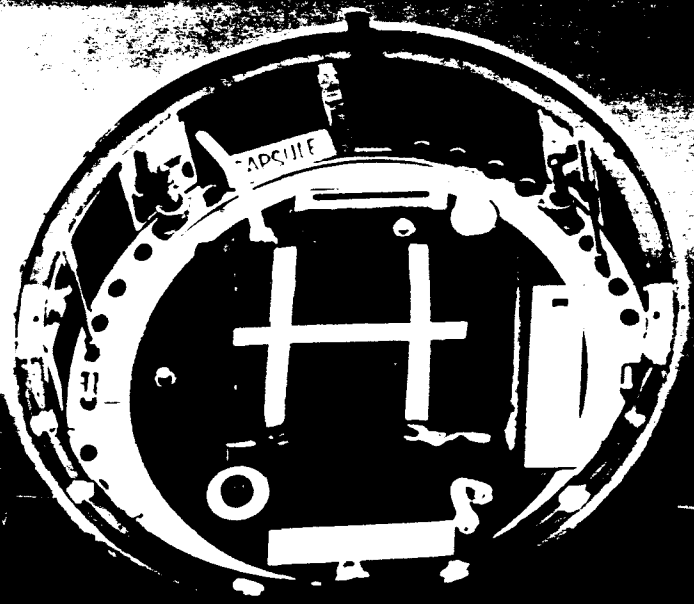

+Z YAW


**ROLL
AXIS
+X**

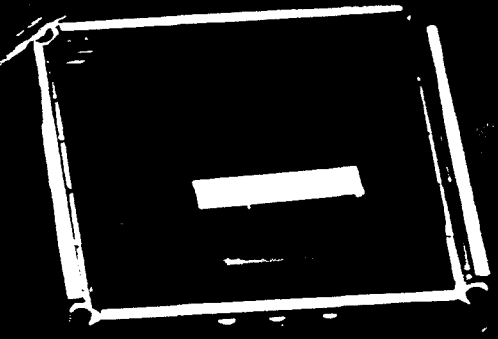


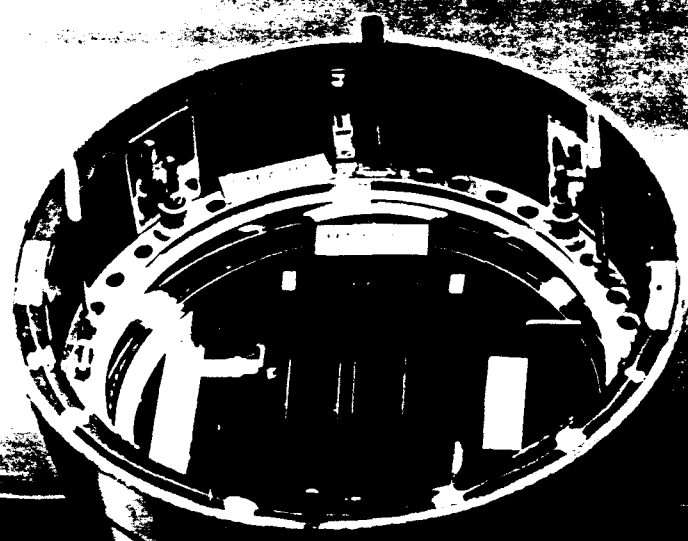

+Z YAW

ROLL
AXIS
+X

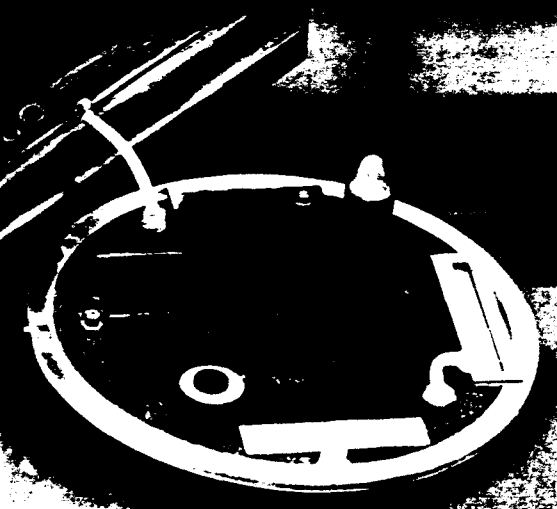

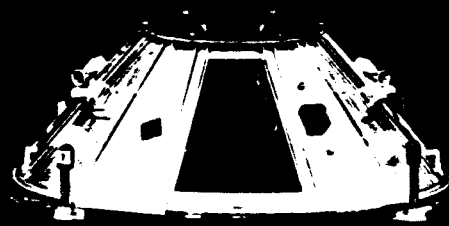

+Z YAW


ROLL
AXIS
+X

+Y PITCH


C_M INBOARD PROFILE

PERFORMANCE
125 N.M.


SO-132 125 L/WM 10'
COVERAGE 6.8 M n.m²/F11
Stereo

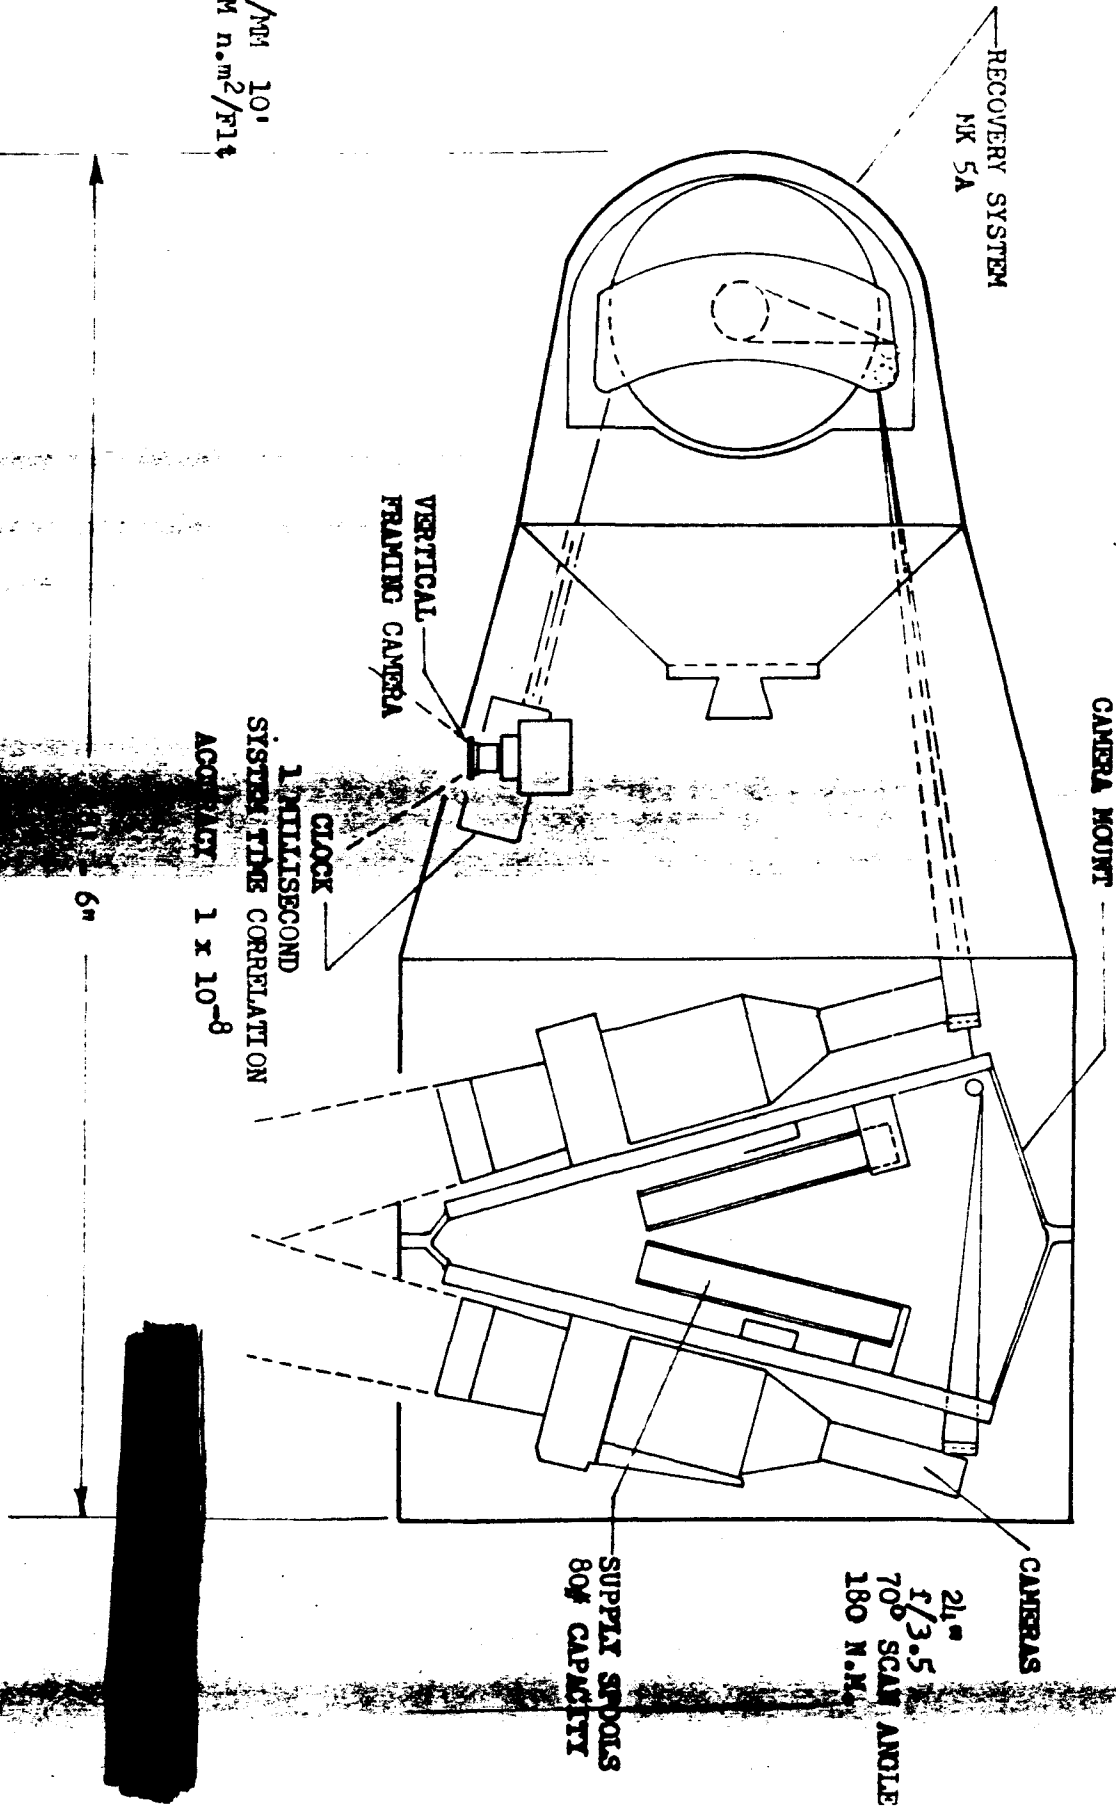

4715 / 10

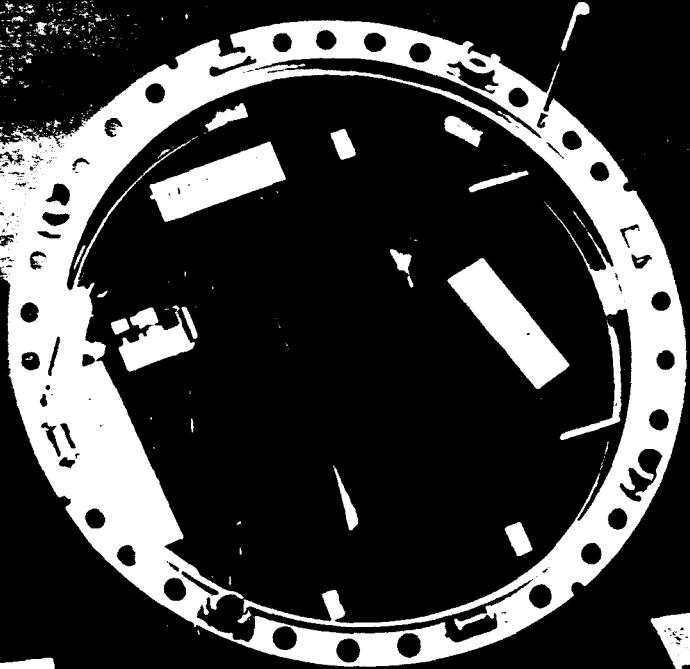

Y PITCH

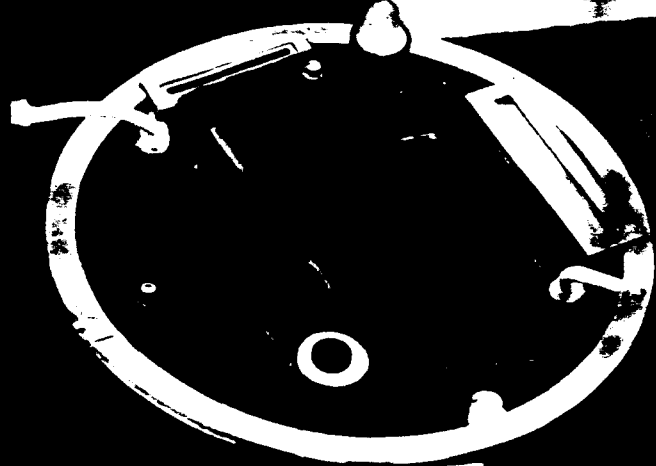


ROLL RATE

+Z YAW

ROLL
AXIS
+X


C.C.' INBOARD PROFILE

PERFORMANCE
 135 N.M.
 30-102 55 I/MEM 25'
 50-132 94 I/MEM 11'
 COVERAGE 6.8 M n.m. 2/ft.

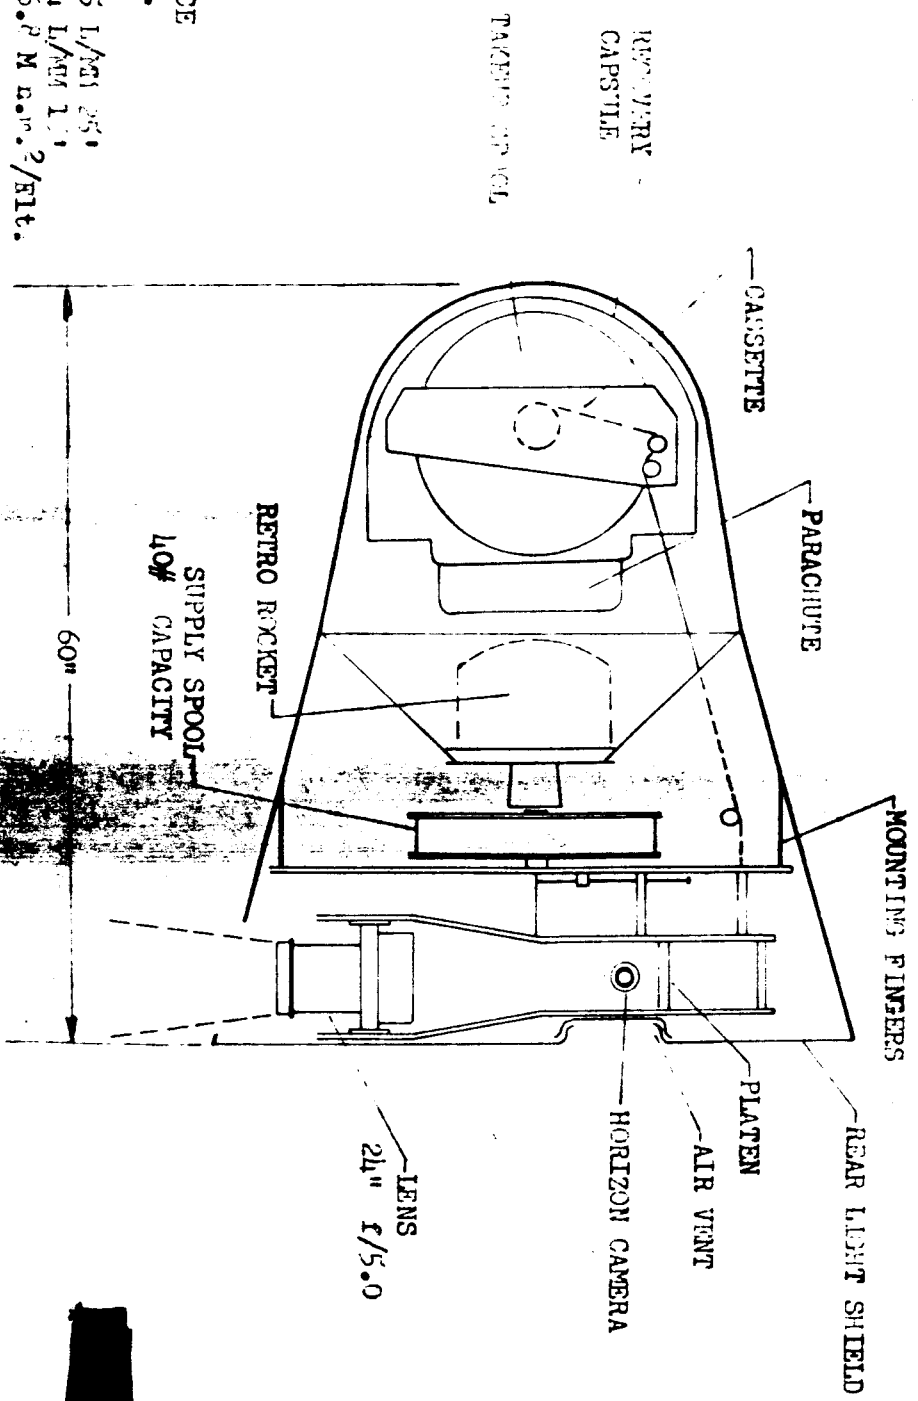

~~TOP SECRET~~


C-119 INBOARD PROFILE

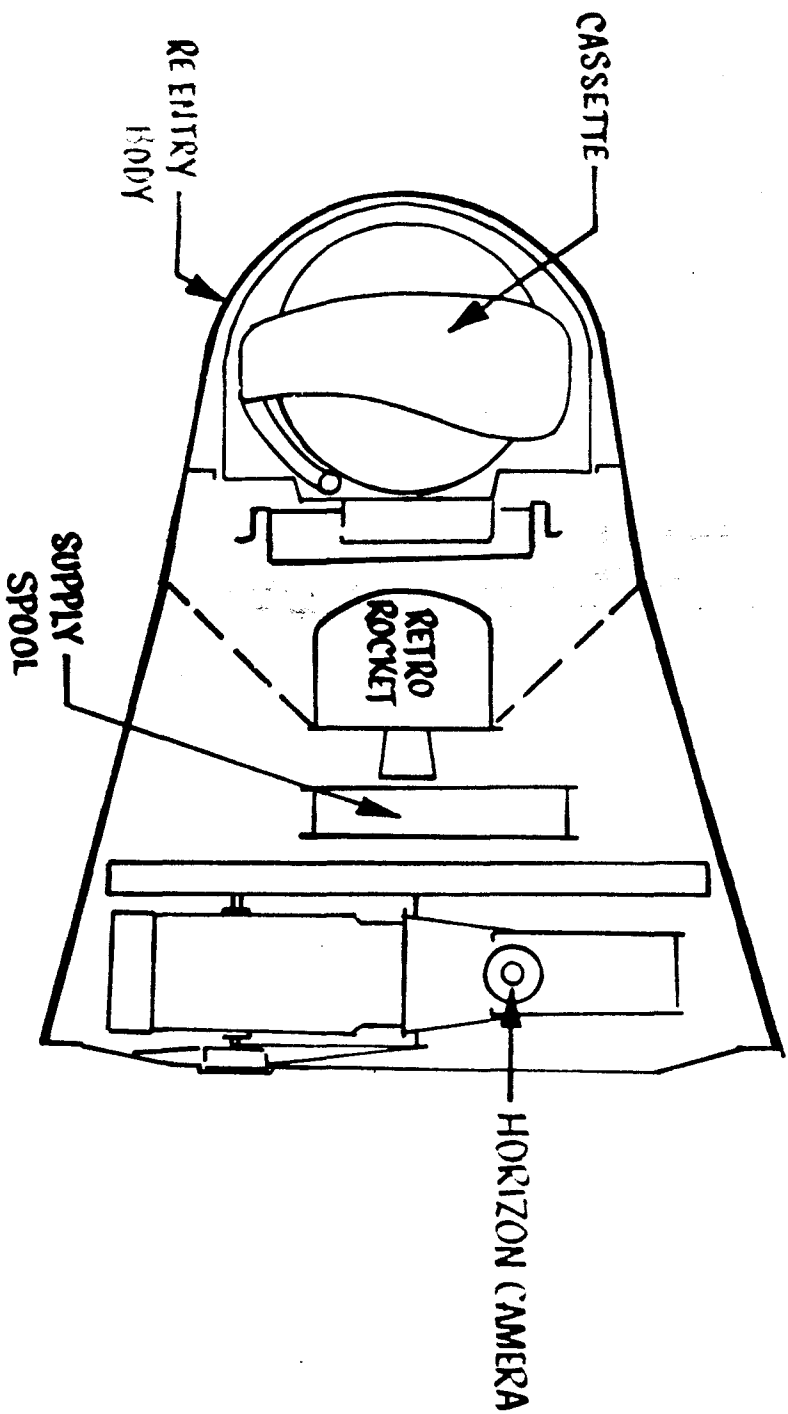


~~TOP SECRET~~

~~TOP SECRET~~

C, C' INBOARD PROFILE

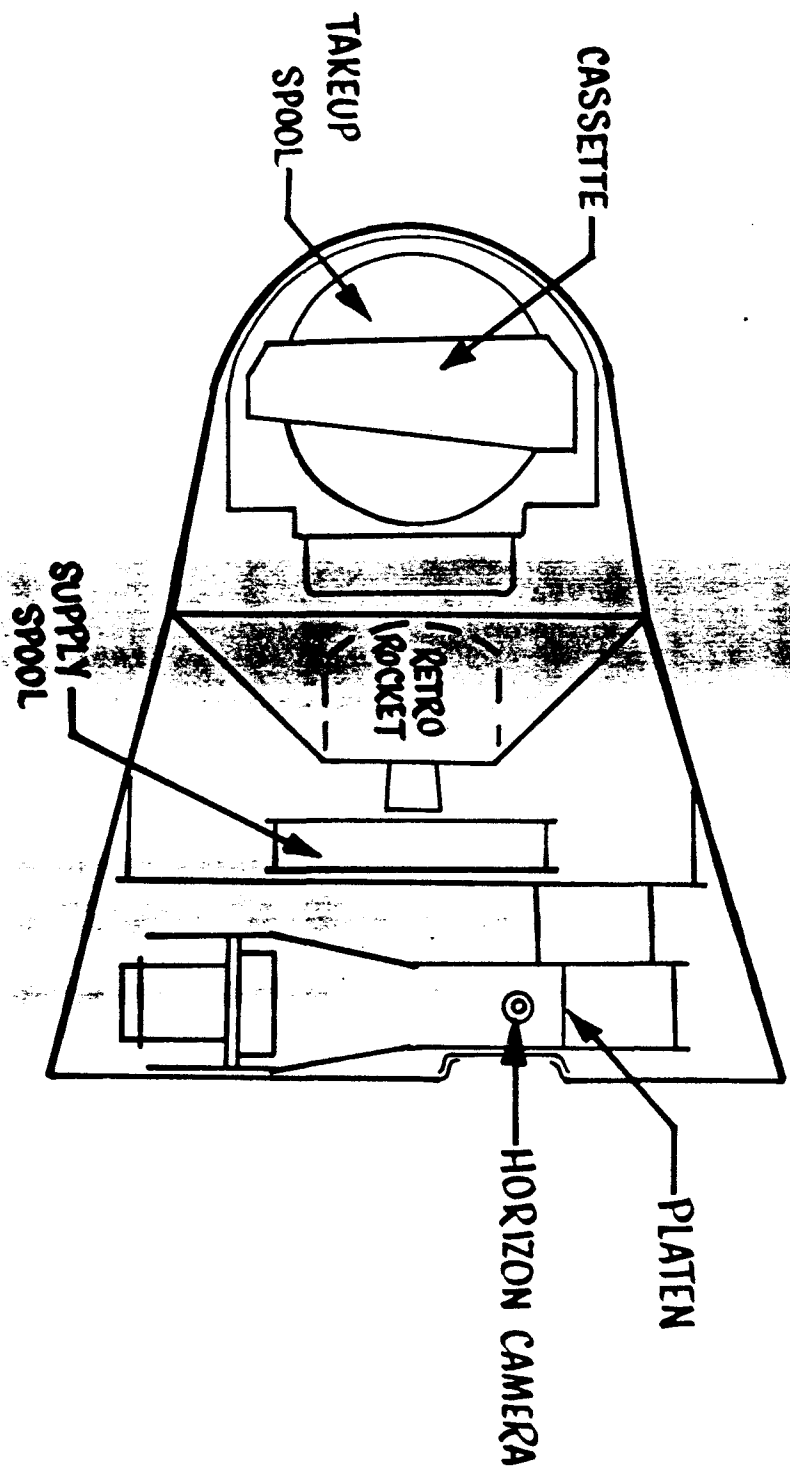


C_J INBOARD PROFILE

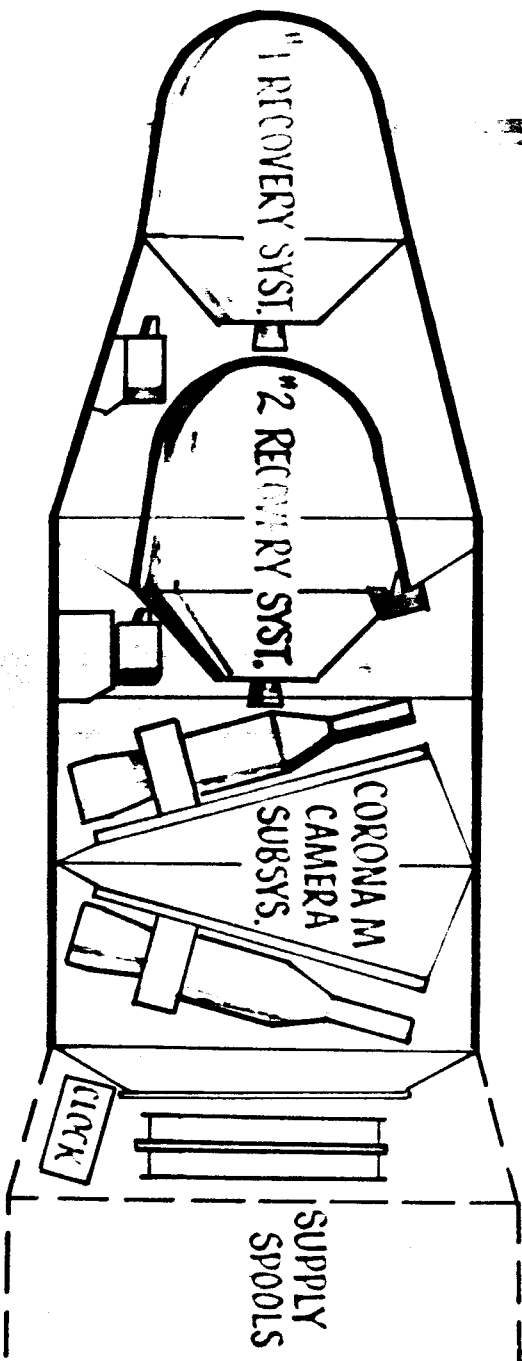

PERFORMANCE AT 125 NM
SO-132 125 L/MM 10'
COVERAGE 13.6 M NM²/FLT
STEREO


TOP SECRET

CM INBOARD PROFILE

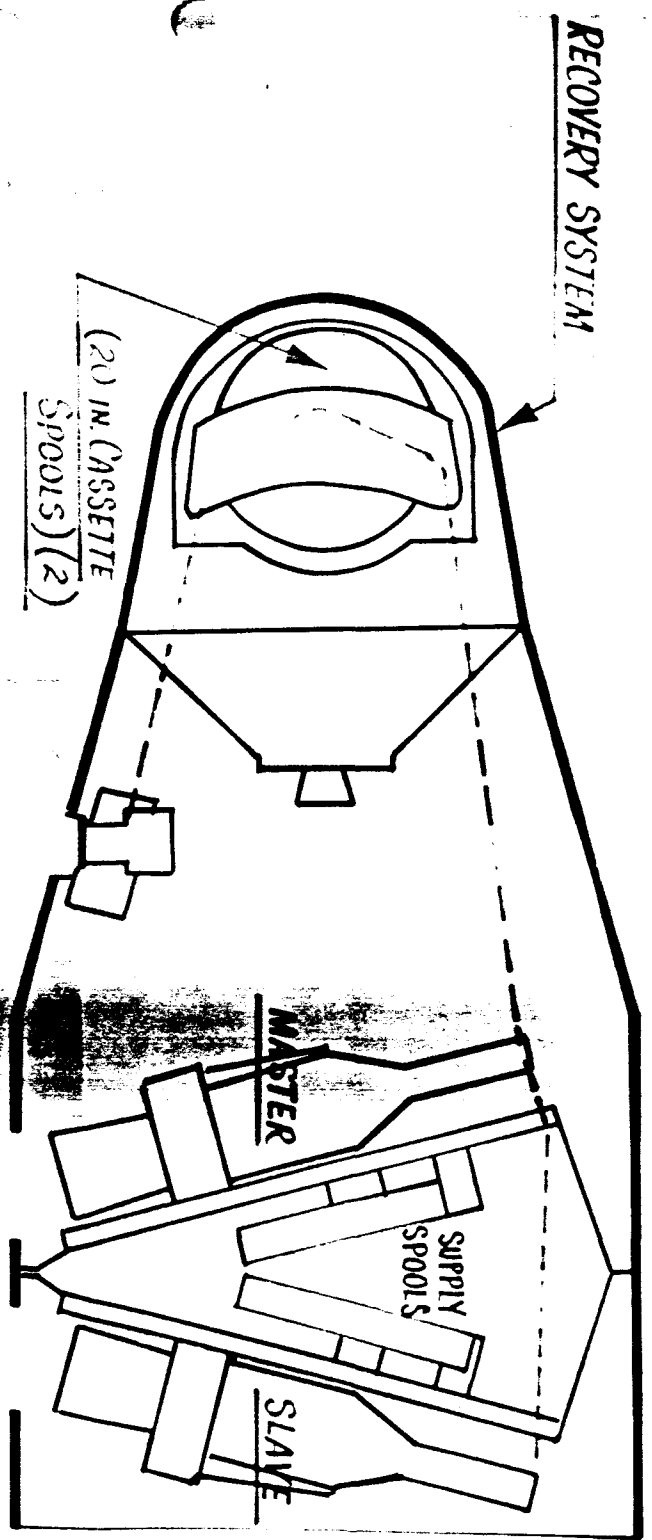


PERFORMANCE - 125 NM
 SO-132 125 L/NM 10'
 COVERAGE 6.8 M NM²/FLT
 STEREO

INBOARD PROFILES

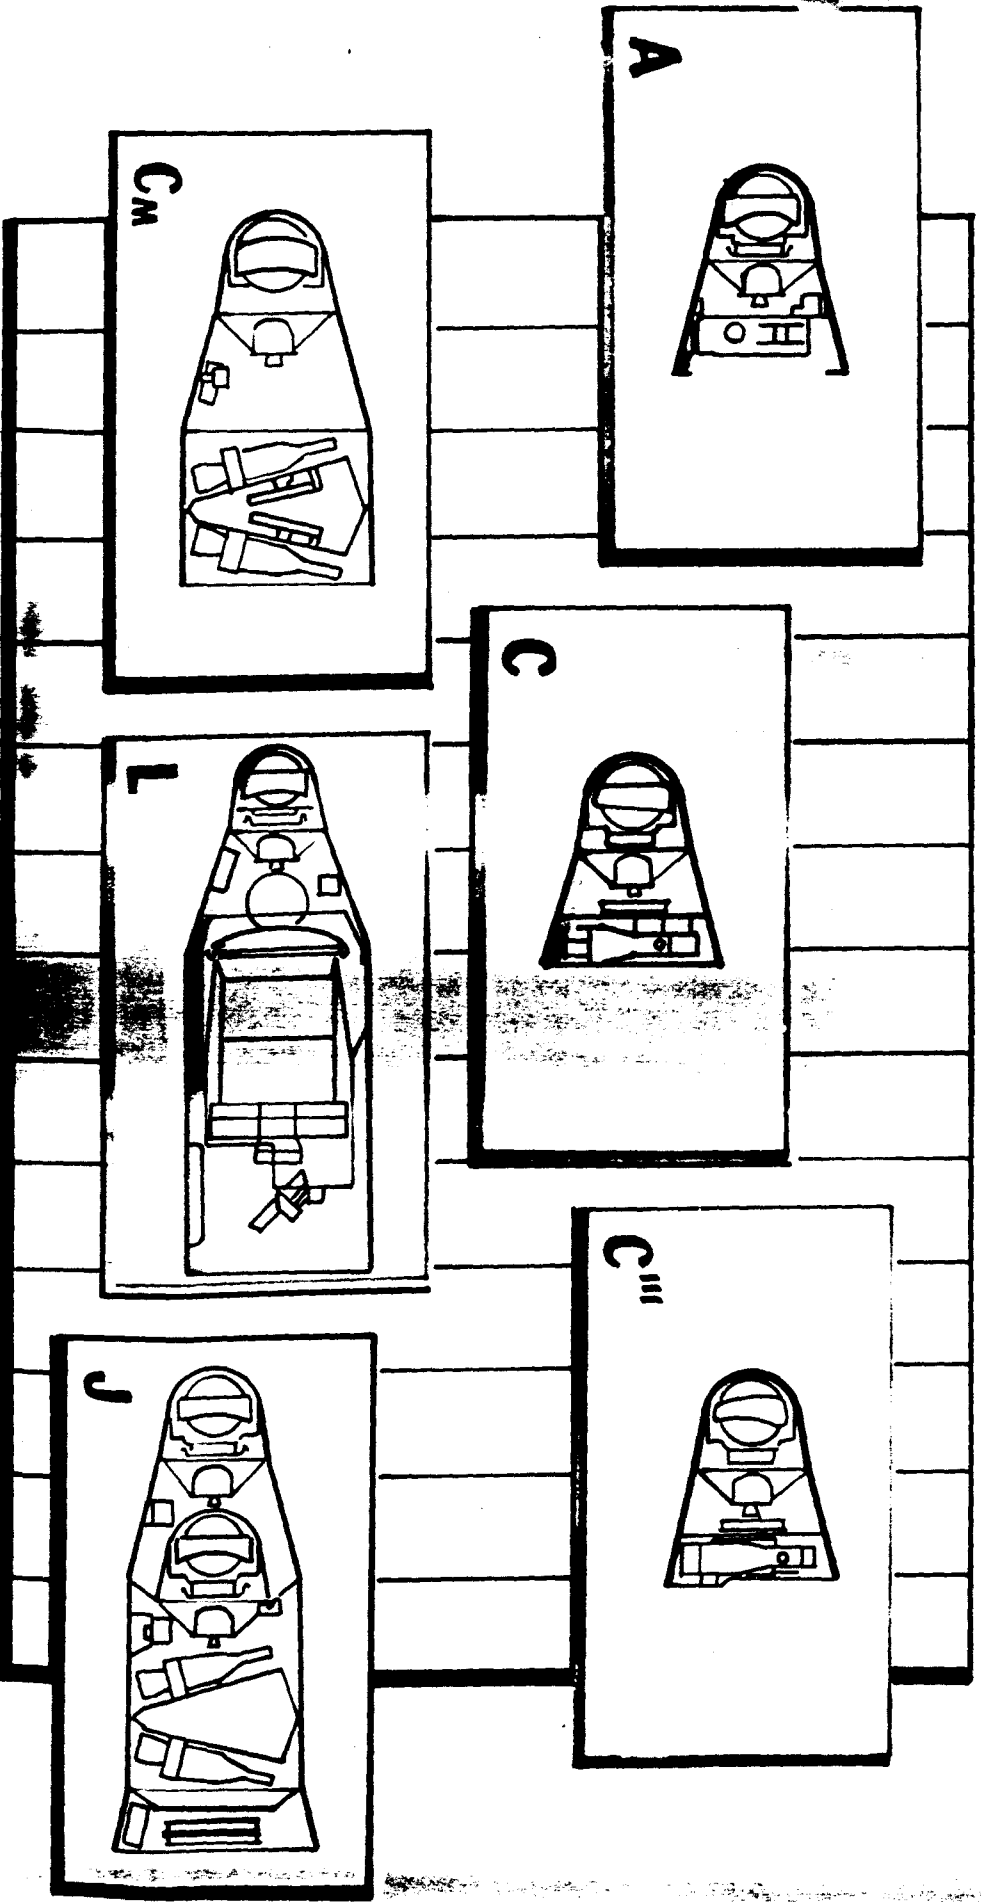

TOP SECRET


Slide 32

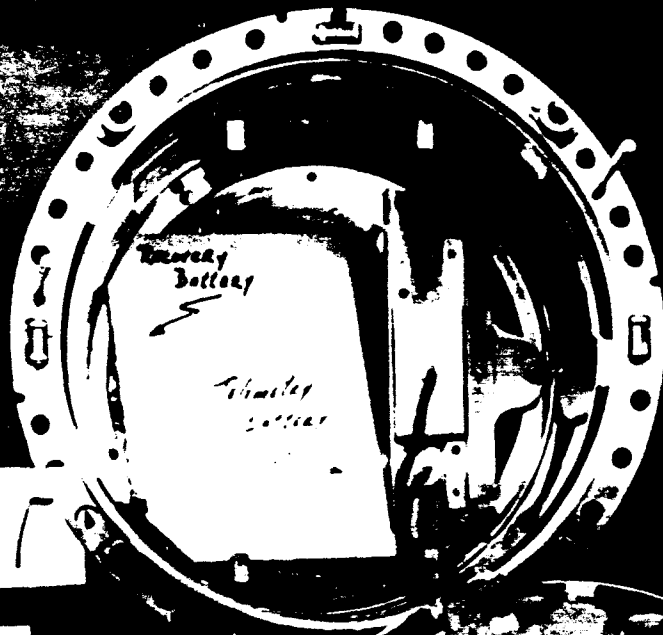

ROLL
AXIS
+X


PITCH
+Y

YAW
+Z

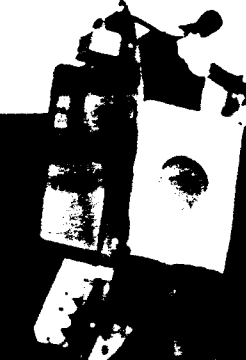

RECOVER

DISIC T/U

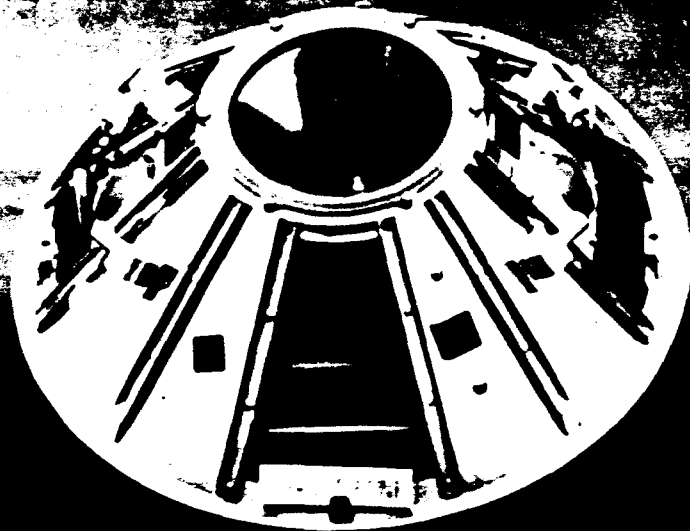

PITCH

+Z YAW

ROLL
 AXIS
 +X

