



Copy [redacted]
84 Pages



March 1965

TECHNICAL PUBLICATION


PHOTOGRAPHIC EVALUATION REPORT MISSION 1010-1, 14-19 SEPTEMBER 1964 MISSION 1010-2, 19-23 SEPTEMBER 1964

This document contains information referring to
Project Corona

WARNING

~~This document contains information affecting the national security of the United States within the meaning of the espionage laws, U.S. Code Title 18, Sections 793 and 794. The law prohibits its transmission or the revelation of its contents in any manner to an unauthorized person, as well as its use in any manner prejudicial to the safety or interest of the United States or for the benefit of any foreign government to the detriment of the United States. It is to be seen only by personnel especially indoctrinated and authorized to receive information in the designated control channels. Its security must be maintained in accordance with regulations pertaining to the designated controls.~~

NATIONAL PHOTOGRAPHIC INTERPRETATION CENTER

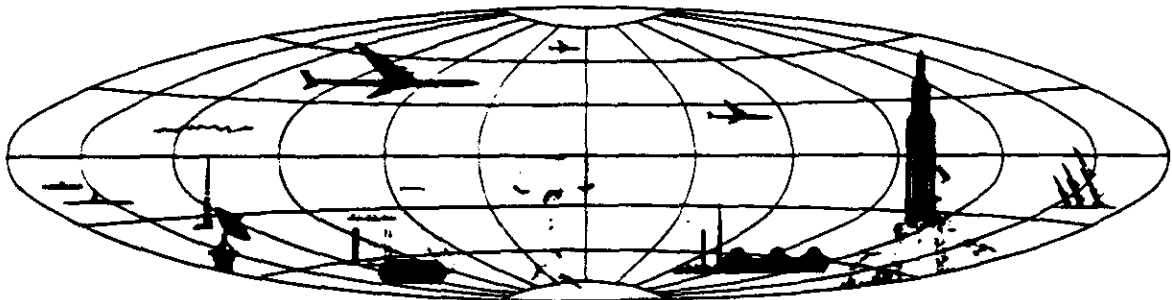

NOV 26 1997

~~TOP SECRET~~
CORONA
~~NO FOREIGN DISSEM~~

TECHNICAL PUBLICATION

PHOTOGRAPHIC EVALUATION REPORT
MISSION 1010-1, 14-19 SEPTEMBER 1964
MISSION 1010-2, 19-23 SEPTEMBER 1964



March 1965

NATIONAL PHOTOGRAPHIC INTERPRETATION CENTER

~~TOP SECRET~~
CORONA
~~NO FOREIGN DISSEM~~



Notice of Missing Page(s)

Pages 8, 26, 28, 66, and 70 of the original document were blank and unnumbered.




TABLE OF CONTENTS

	Page
SYNOPSIS	1
GENERAL FLIGHT DATA.....	2
PART I. CAMERA OPERATION	3
1. Master (FWD) Panoramic Camera No 152	3
2. Slave (AFT) Panoramic Camera No 153	4
3. Master Horizon Cameras	5
4. Slave Horizon Cameras	5
5. Stellar Camera No 41 (Mission 1010-1).....	5
6. Stellar Camera No 44 (Mission 1010-2)	6
7. Index Camera No D41 (Mission 1010-1)	6
8. Index Camera No D46 (Mission 1010-2)	6
9. Associated Equipment	7
PART II. FILM	9
1. Film Processing	9
2. Film Footage Processed	9
3. Film Degradations	9
4. Film Processing Curves	11
PART III. IMAGE QUALITY	22
1. Definition of Photographic Interpretation (PI) Suitability	22
2. PI Suitability for Mission 1010.....	23
3. Definition of Mission Information Potential (MIP).....	25
4. MIP Rating for Mission 1010-1.....	25
5. MIP Rating for Mission 1010-2	27
6. MIP Ratings of Past Missions	29
APPENDIX A. SYSTEM SPECIFICATIONS	30
1. Panoramic Cameras	30
2. Horizon Cameras.....	31
3. Camera No D41/41/41 (Mission 1010-1).....	31
4. Camera No D44/46/44 (Mission 1010-2).....	32
5. Vehicle Layout	33
6. Horizon Lens Settings (Layout)	34
7. Definitions of Panoramic Camera Format Calibrations	35
8. Format Dimensions (Panoramic Cameras)	37
9. Format Layout (Panoramic Cameras).....	38
APPENDIX B. STELLAR/INDEX AND MASTER CAMERA FRAME CORRELATION ..	39
1. Mission 1010-1	40
2. Mission 1010-2	45





	Page
APPENDIX C. IN-FLIGHT TEMPERATURE SAMPLINGS AND SENSOR LOCATIONS...	51
1. Sensor Locations	52
2. Temperature Summary.....	59
3. Self-Heating Test.....	63
APPENDIX D. MICRODENSITOMETRY	64
1. Definition of Edge Spread Function.....	64
2. Edge Trace No 1	67
3. Edge Trace No 2	68
4. Edge Trace No 3	69
5. Edge Trace No 4	71
6. Edge Trace No 5	72
7. Edge Trace No 6	73
APPENDIX E. DENSITY READINGS	74
1. Stellar Camera	74
a. Mission 1010-1	74
b. Mission 1010-2	75
2. Index Camera	74
a. Mission 1010-1	74
b. Mission 1010-2	75
APPENDIX F. CLOUD COVER ANALYSIS	77
1. Introduction	77
2. Cloud Cover Data Missions 1010-1 and 1010-2.....	78



SYNOPSIS

Mission 1010, a two-part satellite reconnaissance mission, was launched 14 September 1964. The "A" bucket was recovered in an air catch on revolution 65, 19 September 1964, and the "B" bucket was recovered in an air catch on orbit 144, 23 September 1964.

There is an out-of-focus area on the photography of both panoramic cameras beginning at pass 9D. The soft area on the master panoramic camera photography is confined to a narrow band along the camera number edge near the take-up end of each frame. It appears only through pass 47DE. The area on the slave panoramic camera photography is at the frequency mark edge and take-up end. While it is present on most frames, there are frames which appear to be unaffected. The photography of pass 61D is the last to be degraded by the softness. The area is erratic in size and shape, but is generally 1.5 inches wide and extends 4 inches along the edge.

The quality of the panoramic photography not degraded by the out-of-focus condition is good throughout the mission.

The stellar imagery of both stellar cameras is intermittently smeared. While this does not make the process of stellar reduction impossible, it does make it difficult.

A light leak resulted in fogged areas on the photography of the stellar and index cameras of Mission 1010-2. The degradation is minor except on the frames affected during camera-off periods.



GENERAL FLIGHT DATA

Date of Launch: 14 September 1964.

Orbital Parameters
(Revolution 1)


Period 90.971 min
Perigee 97.45 nm
Apogee 259.19 nm

Eccentricity 0.02236
Perigee Latitude 42.567°N
Inclination Angle 84.96°N

(Revolution 107)

Period 90.81 min
Perigee 99.58 nm
Apogee 257.09 nm

Eccentricity 0.02181
Perigee Latitude 68.389°N
Inclination Angle 87.96°N



PART I. CAMERA OPERATION

1. Master (FWD) Panoramic Camera No 152

a. Minus density streaks, approximately parallel to the path of the field flattener, are minor and few throughout the first 75 percent of the mission. Although the resulting degradation is still minor, the streaks become more pronounced and frequent after pass 87D. Frames 90-129, pass 88D, are an extreme example of the minus density streaks.

b. Scratches just inside the format at each edge under the camera number and just inside the format at each edge at the take-up end, appear on each frame except on the first frame following a camera-off. These scratches have appeared on all of the "J" Missions to date. There is a multitude of longitudinal emulsion scratches throughout the mission. Most of them are very light and are not believed to be camera induced. One exception is a scratch approximately 0.1 inches inside the format at the camera number edge and supply end. It is about 4 inches long and parallel to the film edges. It is believed to be camera induced and is intermittent on pass 69D and thereafter throughout the remainder of the mission. Rail scratches are continuous.

c. Fog on the first and last frames of most passes is the result of light entering the chimney around the lens housing during camera-off periods.

d. Smearing of highly reflective images (clouds, beaches, etc.) results from reflections within the camera. The smearing is always parallel to the film edges and is believed to be caused by reflections from the field flattener. The resulting degradation is dependent upon the intensity of the light entering the camera, and the principal ray.

e. An out-of-focus area appears on each frame between pass 9D, frame 1, and the last frame of 47DE. The affected imagery is within a band approximately 4 inches long and 0.5 inches wide at the take-up end and camera number edge. It extends along the frequency mark edge in a rather irregular configuration that varies slightly from frame to frame. Due to cloud cover, areas of water, and desert areas, it is impossible to definitely establish the location or presence of the soft imagery on every frame. However, it is definite that the anomaly began on pass 9D and ended prior to pass 52D. The passes immediately preceding pass 9D were 9AE and 7D. Because pass 9AE was conducted in darkness, there is no exposure and it is impossible to tell whether or not the soft area exists. The photography of 7D displayed no out of focus imagery. It is interesting to note that the out-of-focus area also disappeared between camera rest periods. The pass following 47DE is 52D. The film of each "J" Mission except 1006 has been degraded in part by an out-of-focus condition. This anomaly is not peculiar to "J" Missions; Mission 9057 (an "M" Mission) was similarly degraded.

2. Slave (AFT) Panoramic Camera No 153

a. Minus density streaks parallel to the path of the field flattener are intermittent throughout the mission. The degradation of imagery associated with the streaks is minor. The streaks are most pronounced on the first four operational passes.

b. An emulsion scratch parallel to the major axis of the film is just inside the format, at the camera number edge and take-up end on each frame. There are several longitudinal emulsion scratches, but they are light and of little consequence. Furthermore, their origin cannot be determined.

c. Light leaks caused fog on the first and last frames of most passes. The fog, like that of the master panoramic camera, is a result of light entering the chimney around the lens housing during camera-off periods.

d. Streaking of highly reflective images is present intermittently throughout the mission. Pass 65D, frame 5, is a good example of the smearing. This problem is discussed in Part I, paragraph e, of this report.

e. Out-of-focus areas are present on the film of this camera intermittently on pass 9D through 61D. Although every frame does not display this soft imagery, most frames do. Like the master panoramic camera the out-of-focus area first appears on the photography of Pass 9D. Unlike the photography of the master panoramic camera the area of soft imagery continues intermittently throughout the photography of Mission 1010-1. The out-of-focus area extends about 4 inches along the frequency mark edge at the take-up end of the frames. Unlike the affected area of the master camera photography it is not confined to a narrow band. It has irregular humps which extend up to 1.5 inches into the format. The size and shape are irregular and at times the imagery in the area normally affected is sharp and well defined. It is of interest that again the out-of-focus area disappears following a camera-off (rest) period. Pass 61D, the last pass displaying the soft imagery, is followed by pass 65D.

3. Master (FWD) Horizon Cameras

a. Both horizon cameras operated well throughout the mission. The imagery is sharp and the arc of the horizon is well defined.

4. Slave (AFT) Horizon Cameras

a. Both horizon cameras of the slave panoramic camera operated well throughout the mission. The imagery is good and there is a good horizon arc.

5. Stellar Camera No 4] (Mission 1010-1)

The stellar imagery is smeared intermittently throughout the mission. The stars are imaged in a barbell configuration: a definite stellar image, a less dense smear, and another definite image. Although it has not been established as fact, it seems that the anomaly is the result of vehicle attitude deviations during exposure. Plus density streaks through the formats (unidentified objects going by the lens) like those noted on previous missions, appear intermittently throughout the mission. When these streaks appear in a straight line through the stellar format, there is no smearing of the stellar images. When the plus density streaks deviate from a straight line, (indicating vehicle instability) the stellar images invariably display smear. In addition, the vehicle manufacturer indicates that preliminary data show that there is a correlation between the smeared imagery and the synchronization of the camera chimneys: when the master and slave panoramic camera chimneys are scanning in the same direction simultaneously, forces are introduced that result in vehicle instability. While degradation introduced by the smear in the stellar imagery complicates the stellar reduction process, it does not make it impossible.

Emulsion cracks parallel to the minor axis of the film are present throughout the last 50 percent of the mission.

The last 22 frames are fogged and abraded in conjunction with film exhaustion.

There is a continuous plus density streak, parallel to the major axis of the film and in line with the camera number, throughout the last 40 frames. Because of the position of the streak there is no degradation of the imagery.

Flare in the format accounted for some degradation to approximately 30 percent of each frame.

6. Stellar Camera No 44 (1010-2)

The stellar imagery of this camera is intermittently smeared like that of the stellar camera used in Mission 1010-1 (camera No 41).

A light leak caused a diagonal streak of fog, variable in length and intensity, on 23 frames of the mission. There is a definite correlation between the fog and camera-off periods. The fog is most intense at the camera number edge and appears to enter the frame from that direction. There is a band of fog 0.10 inches wide parallel to and in contact with the camera number edge intermittently throughout the mission. It does not enter the frame nor degrade the imagery.

A dendritic static discharge resulted in a small area of fog near the center of the film each 0.60 inches along the major axis of the film on the first 75 percent of the mission.

Approximately 30 percent of each frame is degraded by flare (earth flare and flare from the fiducial mounting plates).

7. Index Camera No D41 (Mission 1010-1)

The film of this camera was out of the film plane at the camera number edge during exposure. The result is a distortion of the reseau and out-of-focus imagery at the camera number edge. This also happened at the same relative location on the photography of the index camera of Mission 1007-2 (camera No D56).

There is minor fog at both film edges on the last 10 frames.

8. Index Camera No D46 (Mission 1010-2)

The imagery of this camera is also distorted and out-of-focus at the camera number edge of most frames. The reseau is distorted on the frames displaying out-of-focus and distorted imagery. This is identical to the degradation that affected the imagery of the index camera used in the first half of this mission (Mission 1010-1, index camera No D41).

A streak of fog originates at the camera number edge of each frame and extends approximately 1 inch into the format. This streak of fog is about 0.4 inches wide and is faint except at camera-off periods. The density of the fog on the frame affected during camera-off is commensurate with the duration of the inactive camera period and the solar elevation. The frame affected is the fourth preceding the first frame of a new pass (toward take-up). This fog is apparently the result of a light leak.

There is another area of fog which is detectable only at camera-off periods. It affects the two frames immediately preceding the first frame of a new pass (toward take-up). The fogged area is approximately 2 inches long, along the major axis, and covers nearly the entire width. The fog originates at the correlation mark edge and dissipates toward the other edge. The degradation induced by the fog is minor.

9. Associated Equipment

a. The frequency marks of the master panoramic camera are imaged inside the format with reflected images in the border. Because they are superimposed on the panoramic camera imagery, they are difficult and at times impossible to read.

b. All other collateral equipment operated well throughout the mission.

PART II. FILM

1. Film Processing

This section provides evaluation of processing, exposure, and density of the original negative.

The exposure/density of the panoramic cameras used in this mission was slightly less than that which has come to be considered normal. The slit width used in this mission was 0.175 inches compared to a slit width of 0.20 inches usually used at this time of year. While a lower than normal density of the panoramic photography is apparent, it was not a degrading factor. In some instances the lower densities were an aid to photo interpretation. Sixteen percent of the panoramic photography recovered in the "A" bucket was processed at the intermediate level of development, and 84 percent at the full level; 19.5 percent of the panoramic camera photography recovered in the "B" bucket was processed at intermediate, while 80.5 percent was processed at the full level. There was no panoramic photography processed at the primary level of development.

2. Film Footage Processed

<u>Camera</u>	<u>Feet</u>	<u>Frames</u>
41 (Stellar)	78	422
D41 (Index)	105	423
44 (Stellar)	92	432
D46 (Index)	87	432
152 (1010-1)	8,155	2970
153 (1010-1)	8,183	2973
152 (1010-2)	7,803	2941
153 (1010-2)	7,793	2946

3. Film Degradations

a. A severe processing streak caused some loss of imagery on pass 88D, frame 24 FWD.

b. There are manufacturing splices on passes 22D, frame 32 FWD; 53D, frame 60 FWD; 71D, frame 68 FWD; 7D, frame 38 AFT; 39D, frame 87 AFT; 69D, frame 132 AFT; 100D, frame 93 AFT.

c. Emulsion lifts, pinholes, and blisters are minor and intermittent throughout the mission.



d. In addition to the areas of fog described in Part 1, paragraph c, the second, third, and next to last frames of master panoramic camera photography were also partially fogged on most passes. The fog affecting the second frame is confined to a narrow band in the border area of the camera number edge. Because of its location there is no degradation of imagery. Also on the second frame of most passes there is a faint equipment image at the supply end. On the third frame of a pass there is usually a diagonal streak of fog which extends from edge to edge. The fog that usually appears on the next to last frame is in the form of various equipment shadowgraphs.

e. Fogged areas on the photography of the slave panoramic camera, in addition to that described in Part 2, paragraph c, is usually present on the second, third, and fifth frame of a pass, also on the second, third, and fifth from last frame of a pass. The fog on the third frame of a pass is a diagonal streak approximately 0.1 inches wide extending from edge to edge of the film. An equipment image is also present on the third frame of most passes. Fog on the third and fifth from last frame is also in the form of equipment shadowgraphs. The next to last frame of a pass usually contains a diagonal streak of fog similar to the fog on the third frame of a pass.

f. Dendritic static discharges result in fog along both edges of the film of the master panoramic camera intermittently throughout the mission. The fog is usually minor but on occasions does enter the format. Pass 84D, frames 112-115, are extreme examples of fog induced by dendritic static.


g. Passes 69D, 70D, and 71D of the slave panoramic camera are fogged intermittently along both edges due to dendritic static discharges. The fog occasionally projects into the format but the associated degradation is minor.

4. Film Processing Curves

The following processing curves, as supplied by the film processing contractor, are presented in the interest of comparative analysis:




STANDARD PROCESSING CONTROL CURVES

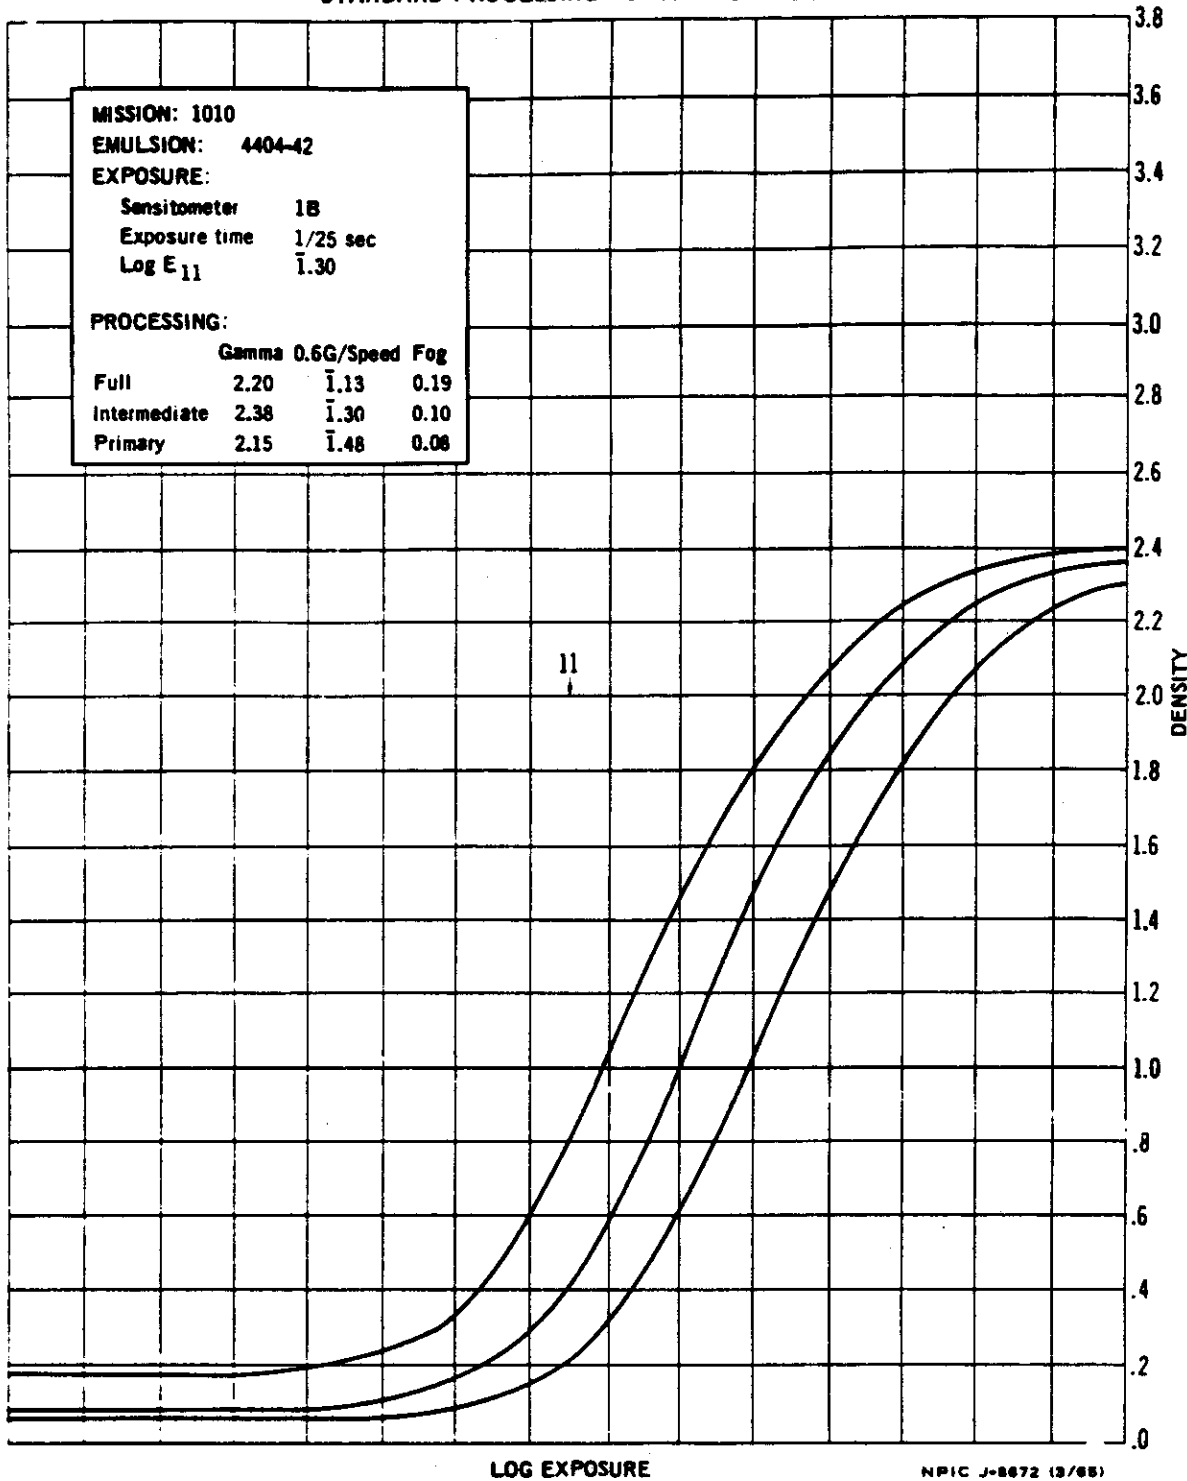




CONTROL CURVE FOR HEAD AND TAIL OF FORWARD MATERIAL

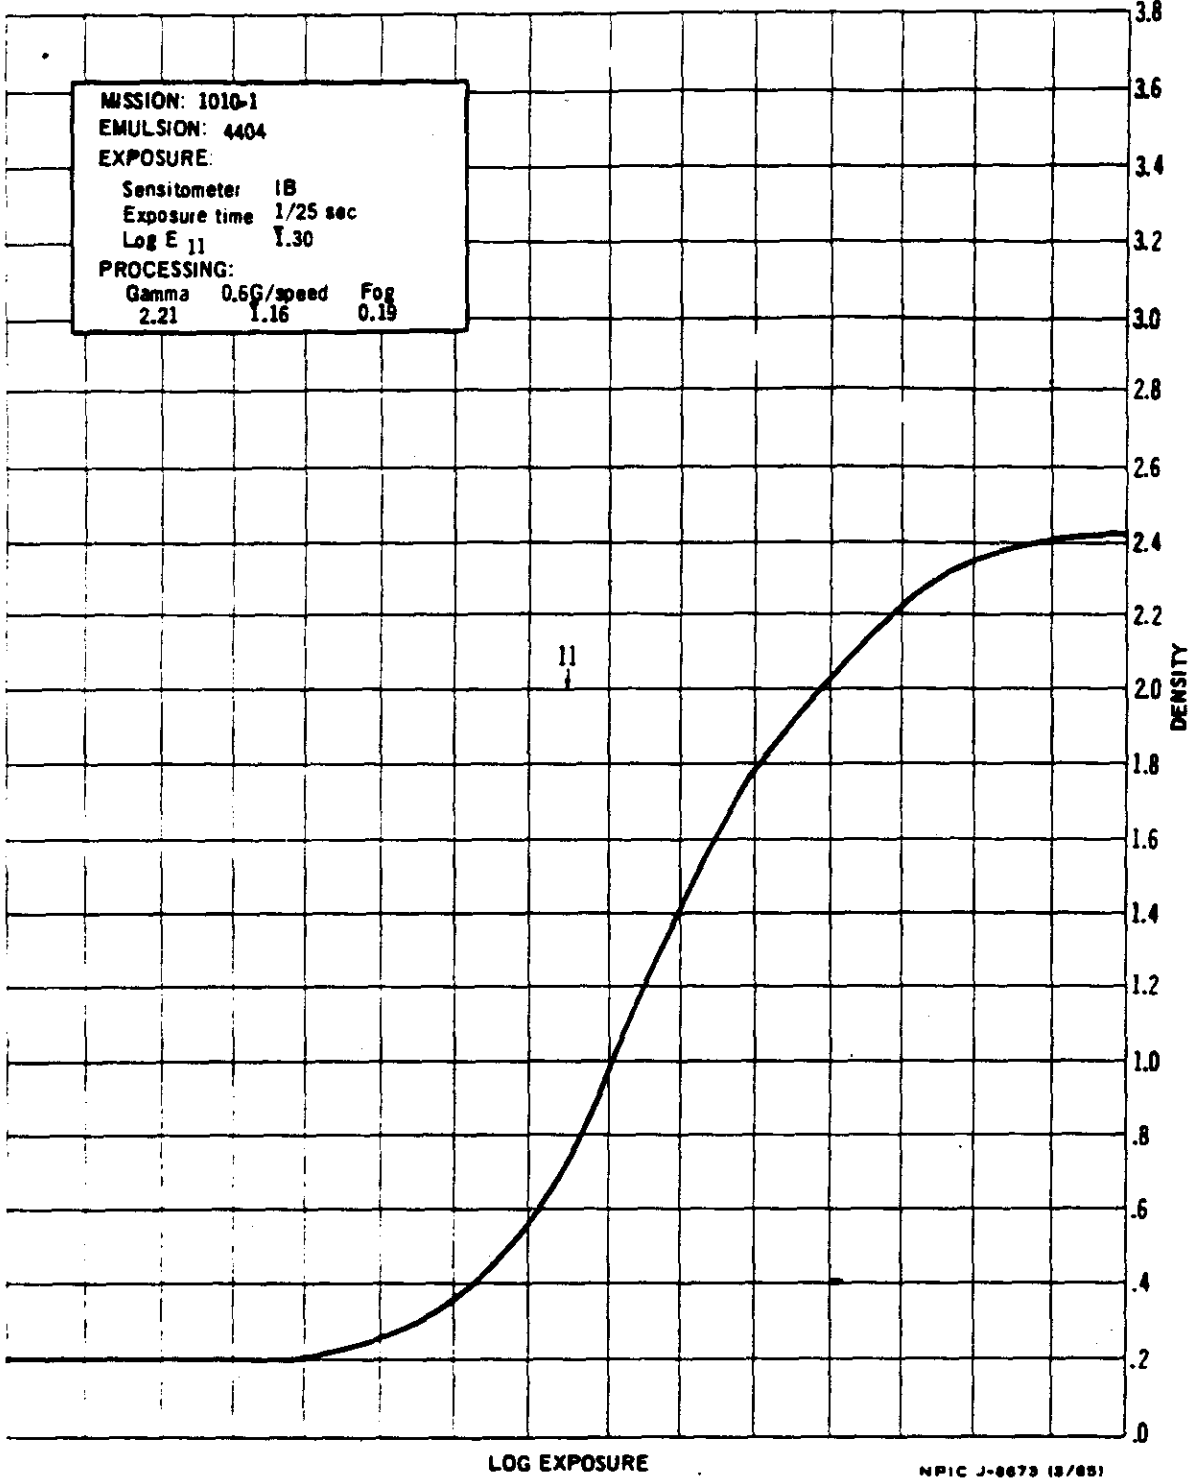

CONTROL CURVE FOR HEAD AND TAIL OF APT MATERIAL

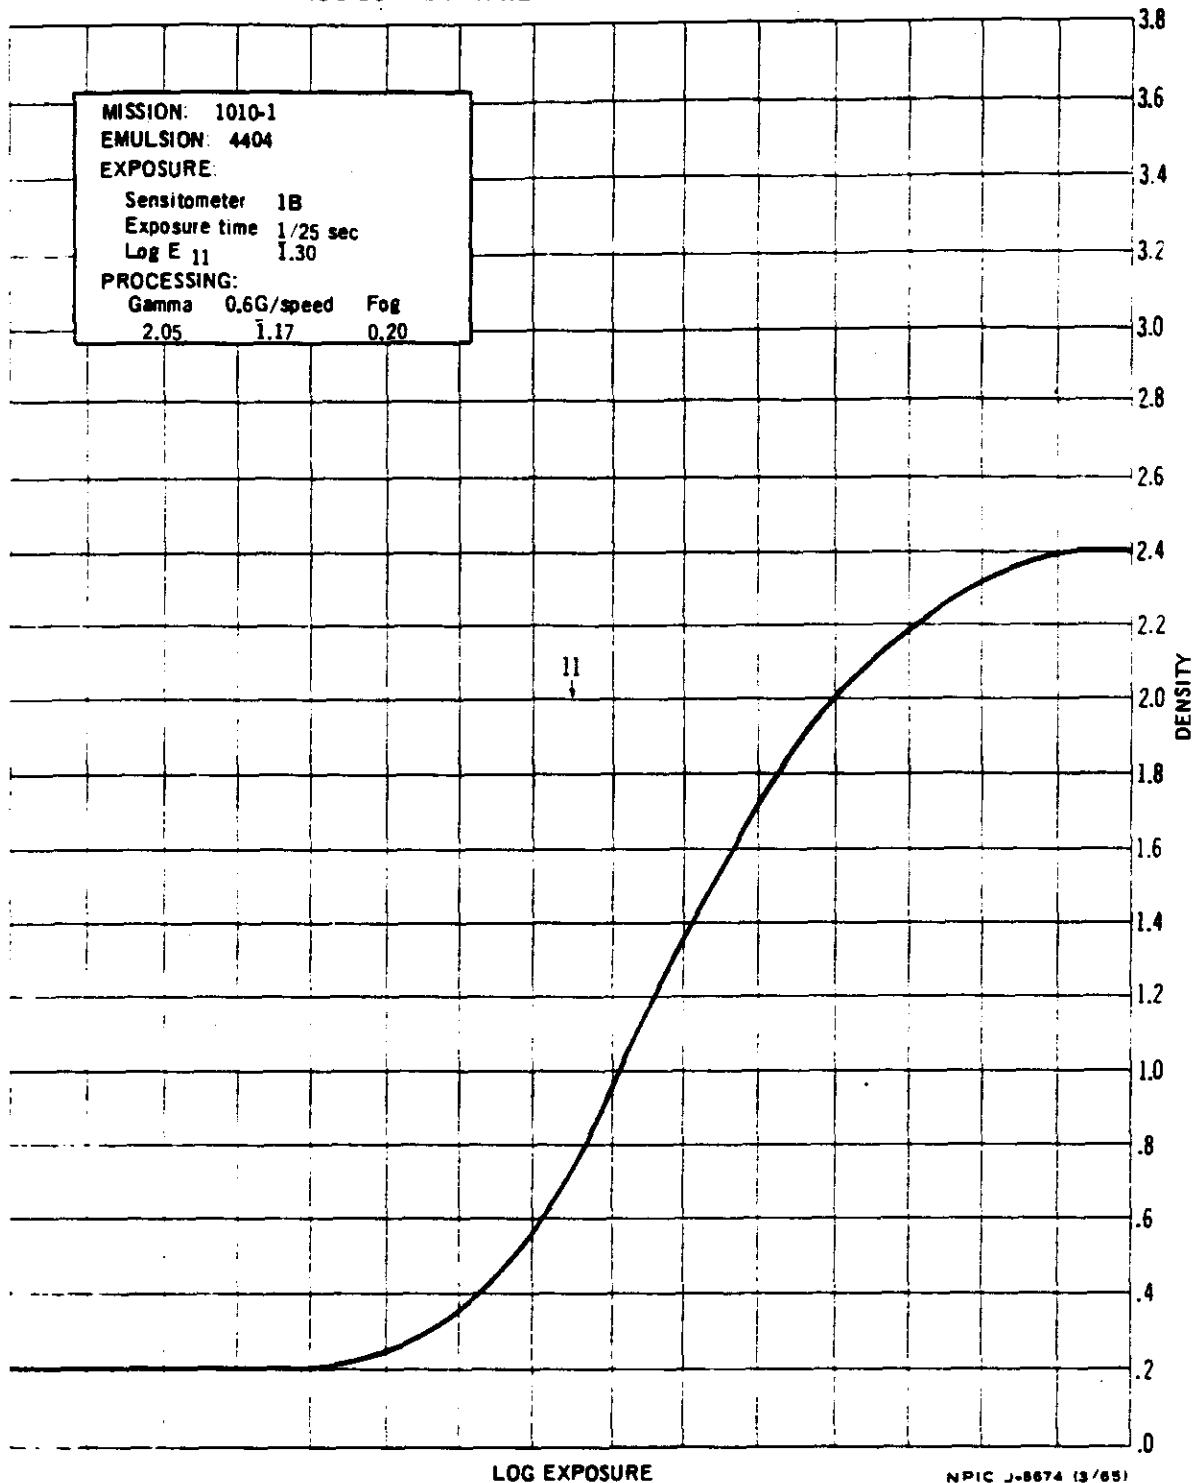


NPIC J-8674 (3/65)



SENSITOMETRIC CURVE FROM MISSION MATERIAL



MISSION: 1010-1
EMULSION: 4404
EXPOSURE
Sensitometer: 1B
Exposure time: 1/25 sec
Log E: 11 1.30
PROCESSING:
Gamma: 0.6G/speed Fog
1.96 1.14 0.20

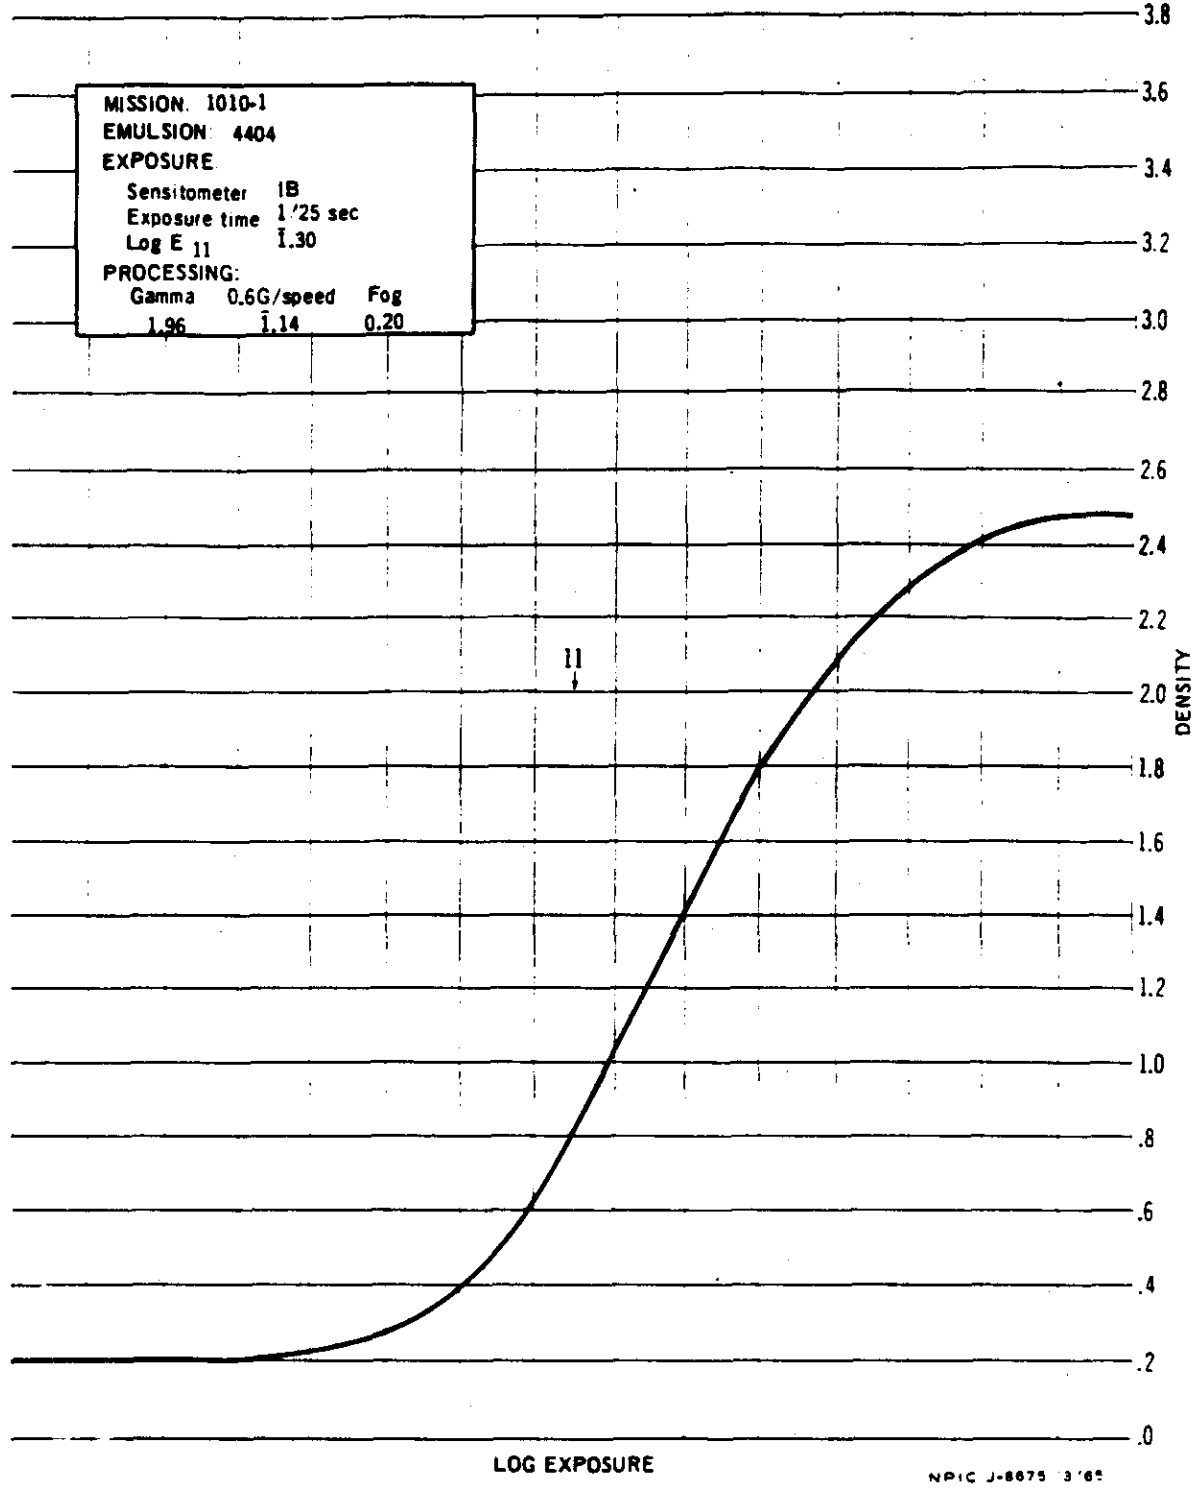

NPIC J-8875 3 '65




CONTROL CURVE FOR HEAD AND TAIL OF INDEX MATERIAL

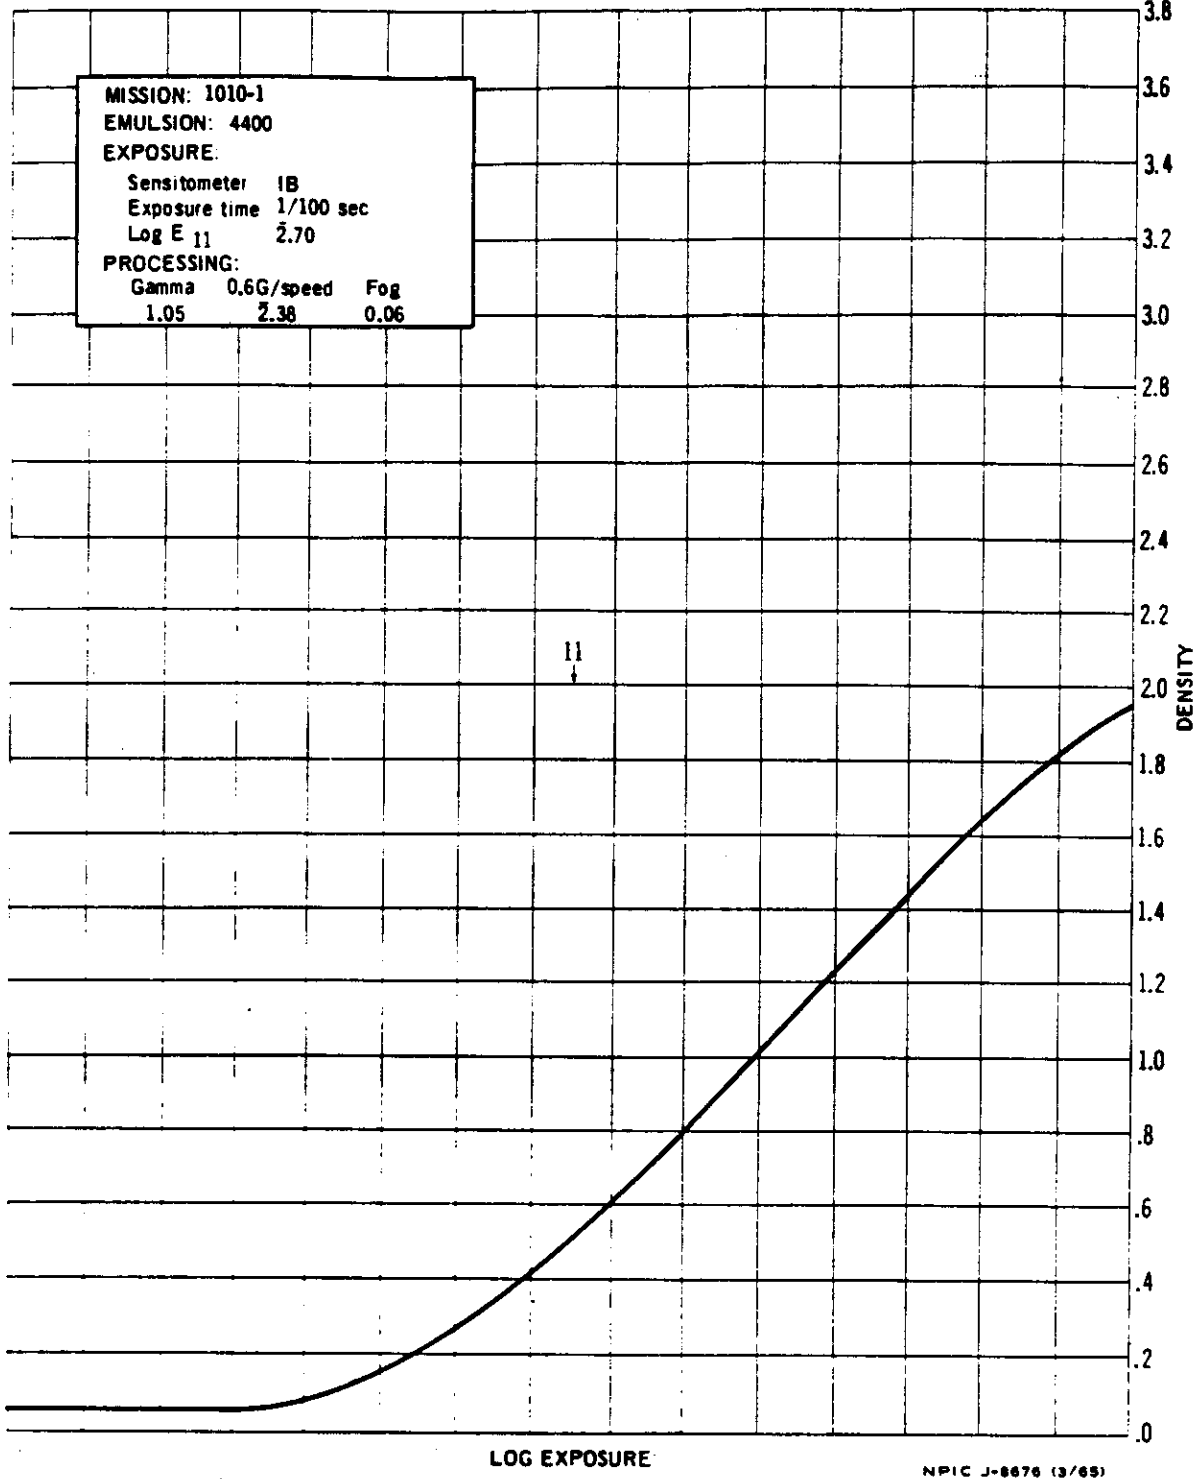




CONTROL CURVE FOR HEAD AND TAIL OF STELLAR MATERIAL

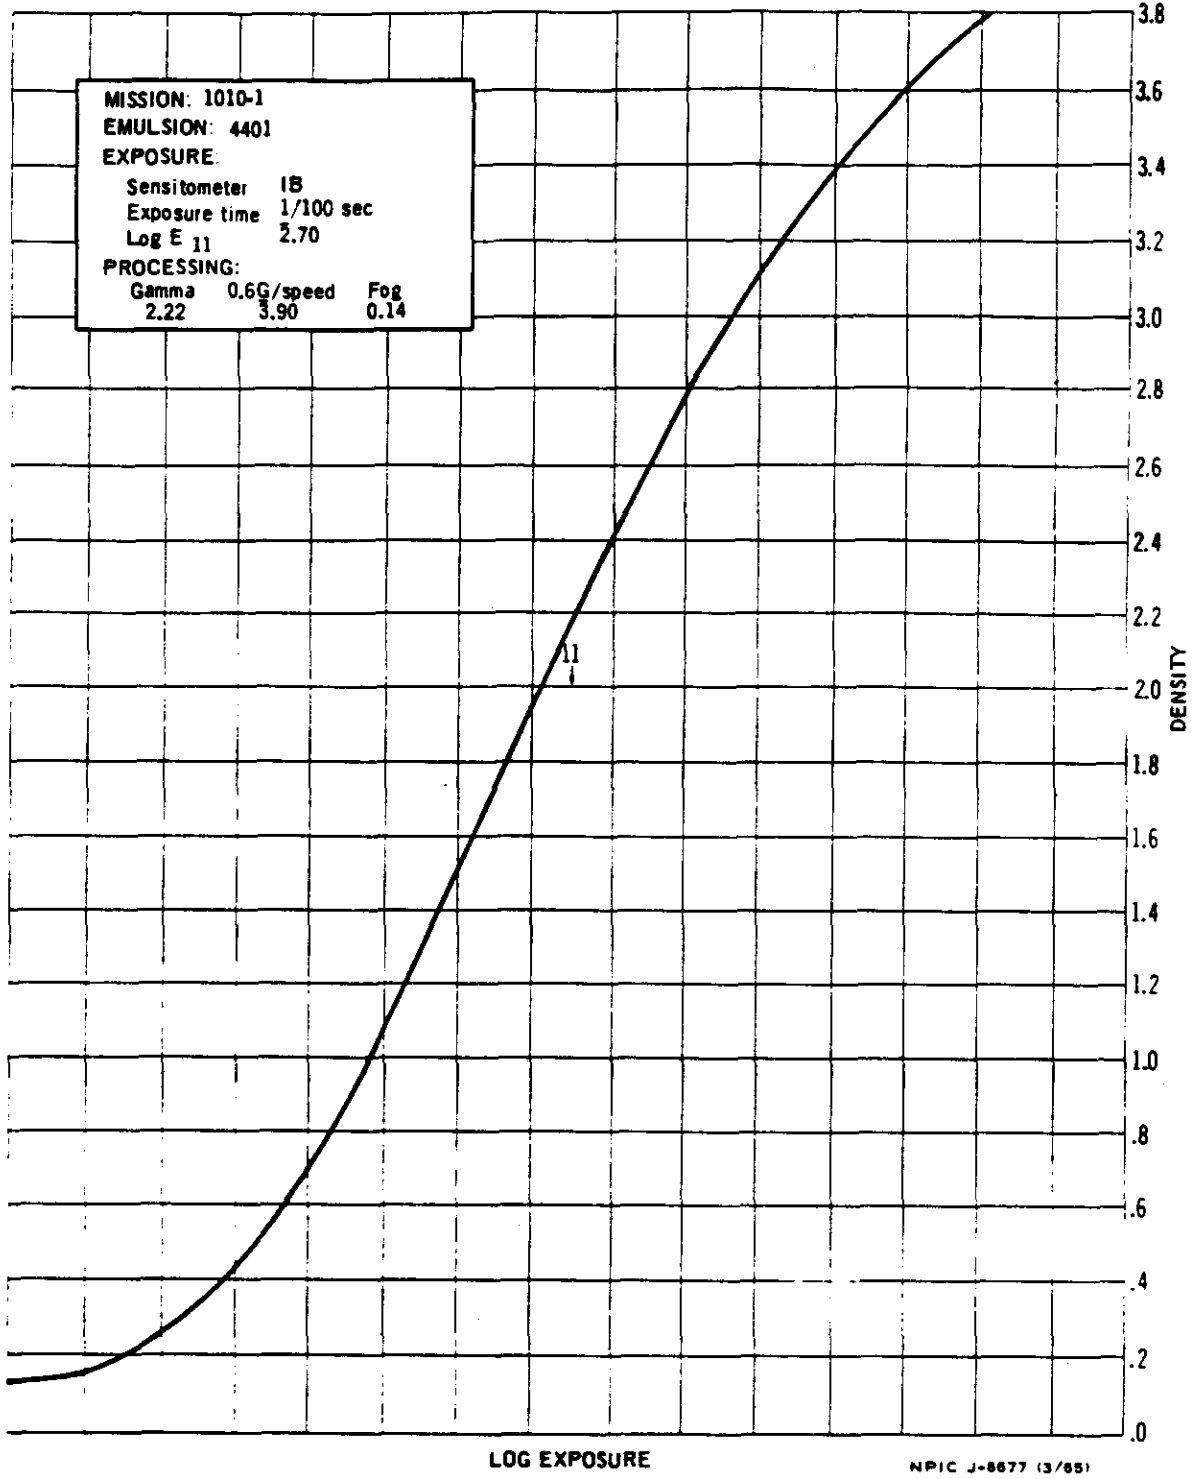


CONTROL CURVE FOR HEAD AND TAIL OF FORWARD MATERIAL

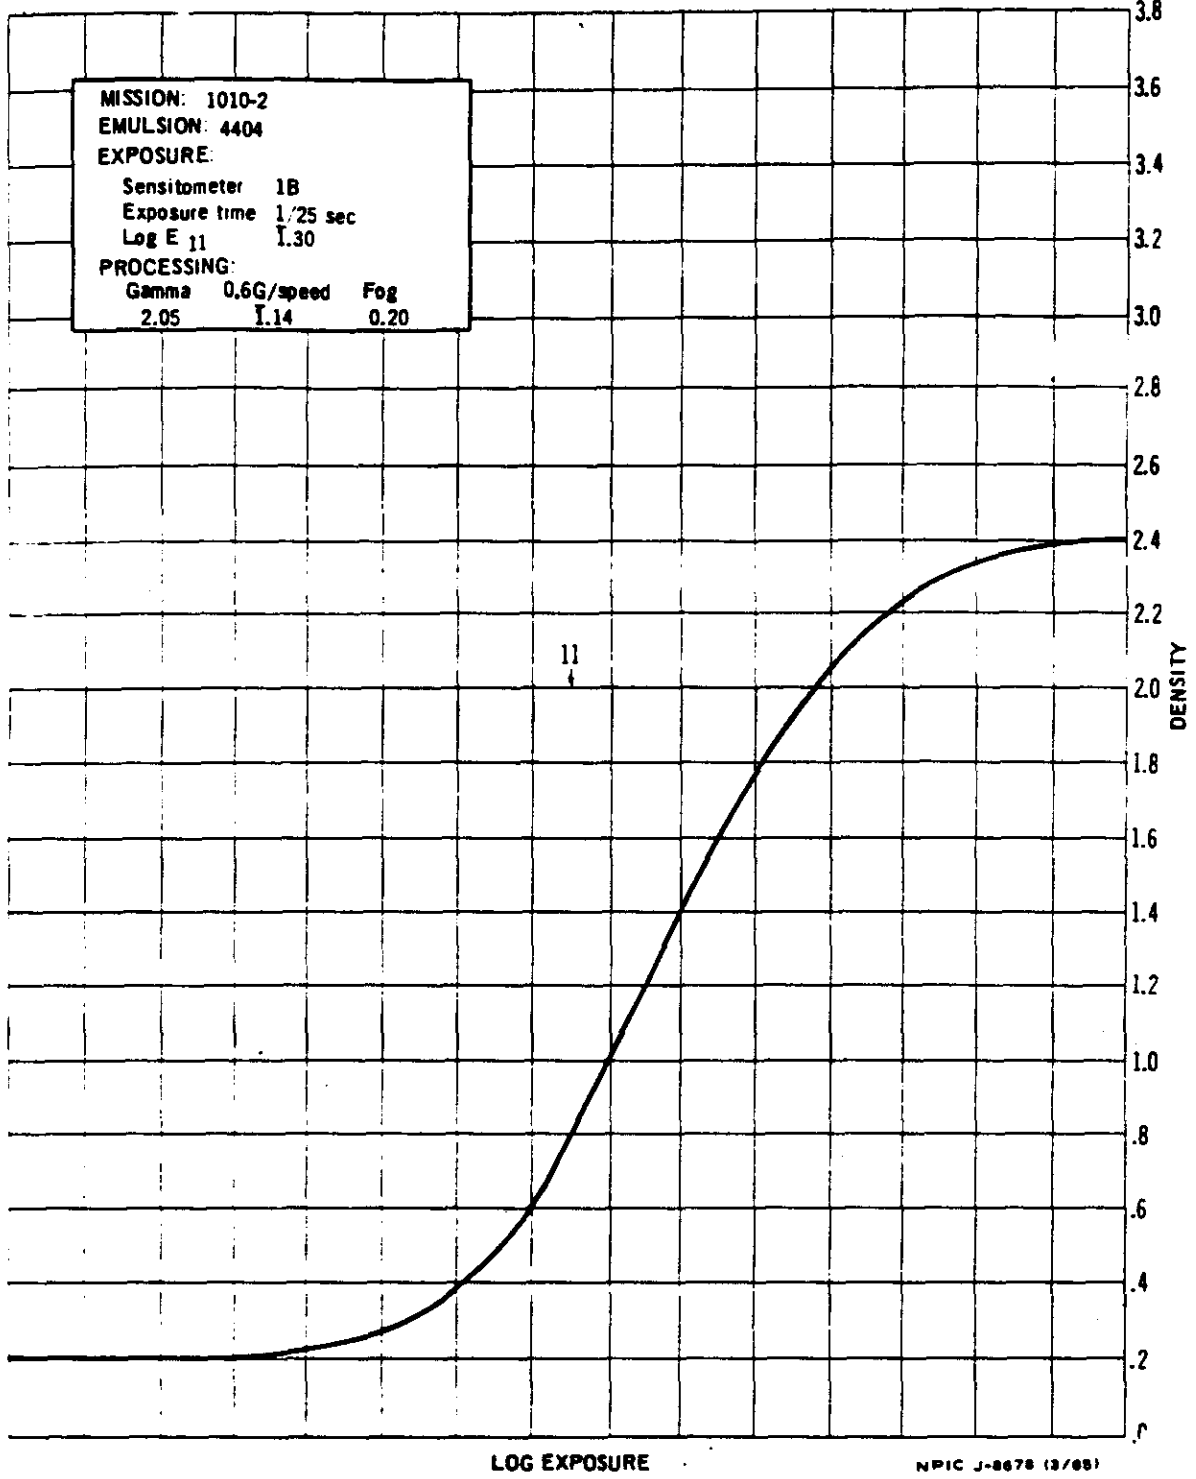




CONTROL CURVE FOR HEAD AND TAIL OF AFT MATERIAL

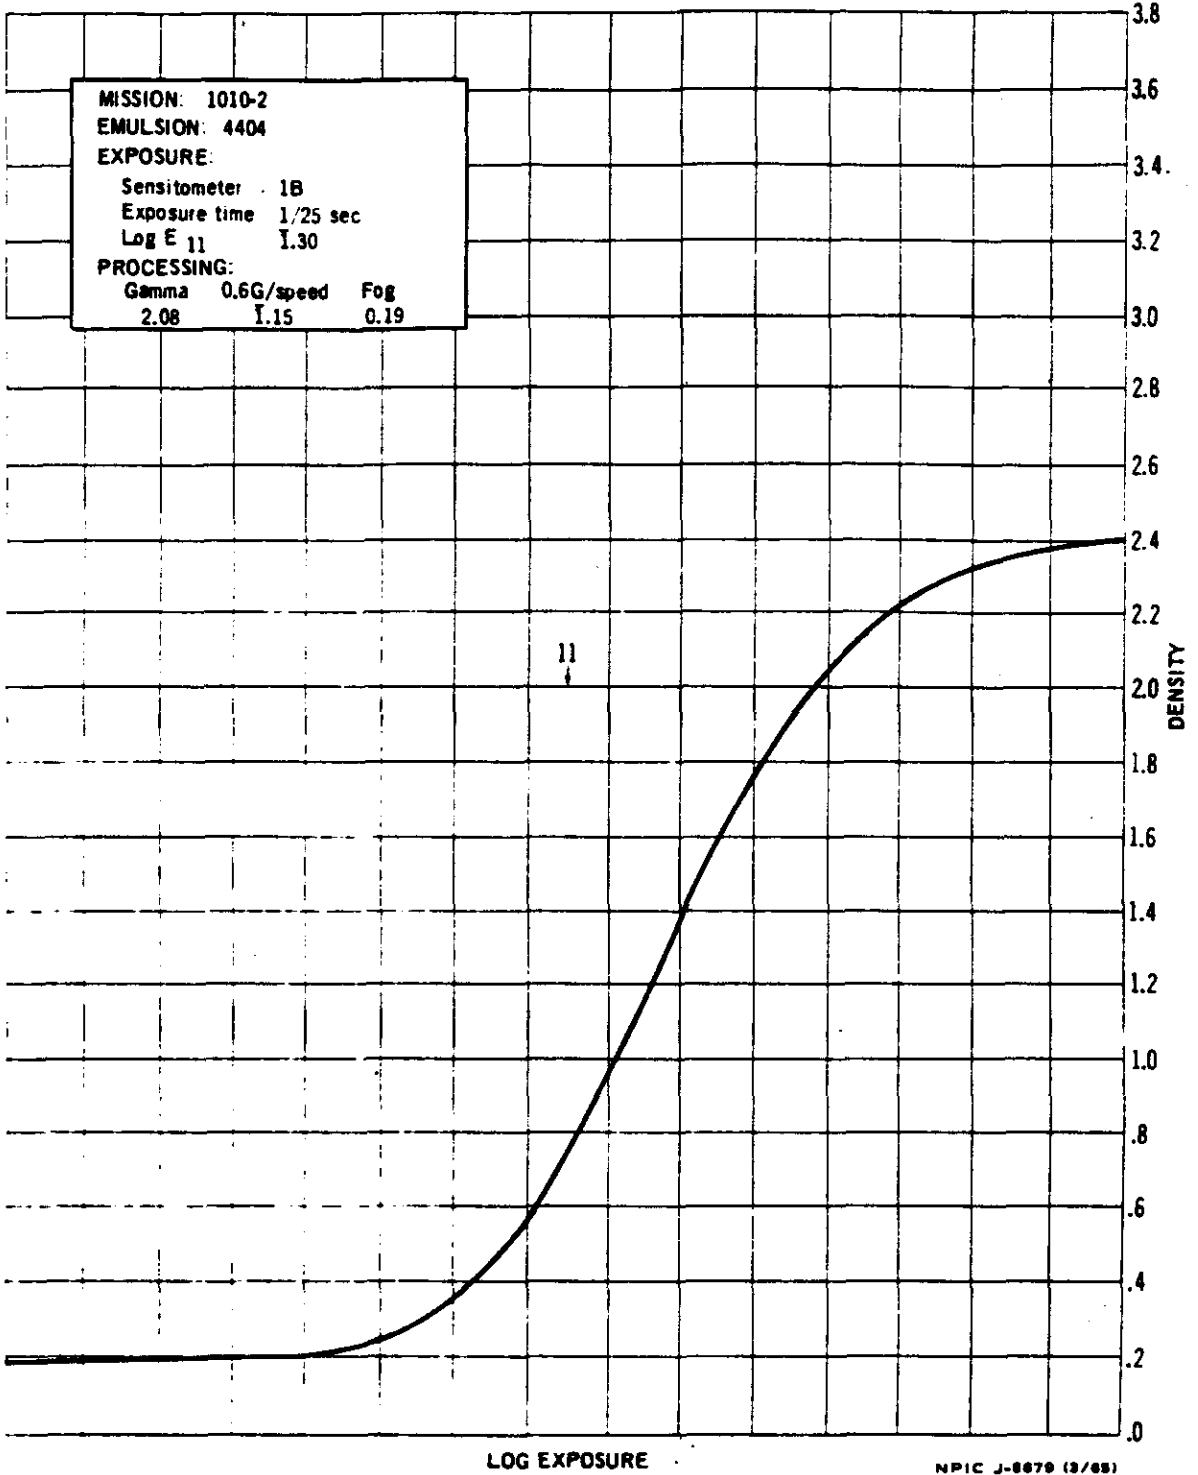



SENSITOMETRIC CURVE FROM MISSION MATERIAL

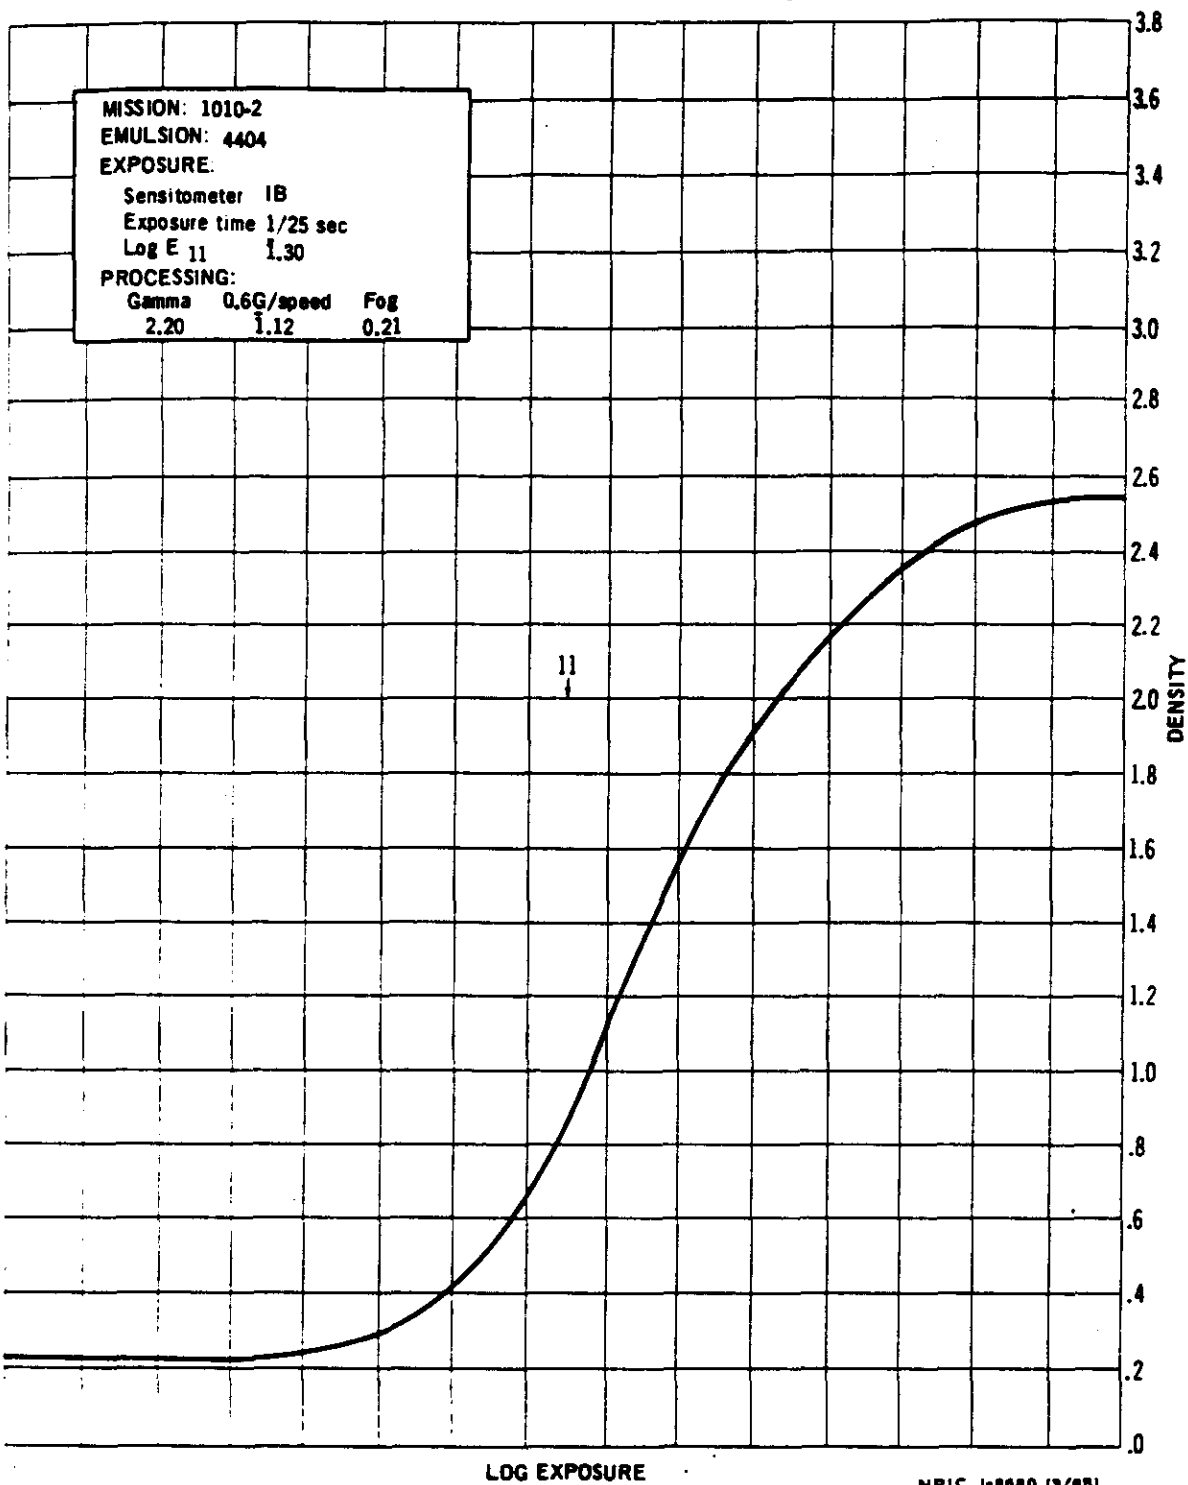

NPIC J-8880 (3/88)




CONTROL CURVE FOR HEAD AND TAIL OF INDEX MATERIAL

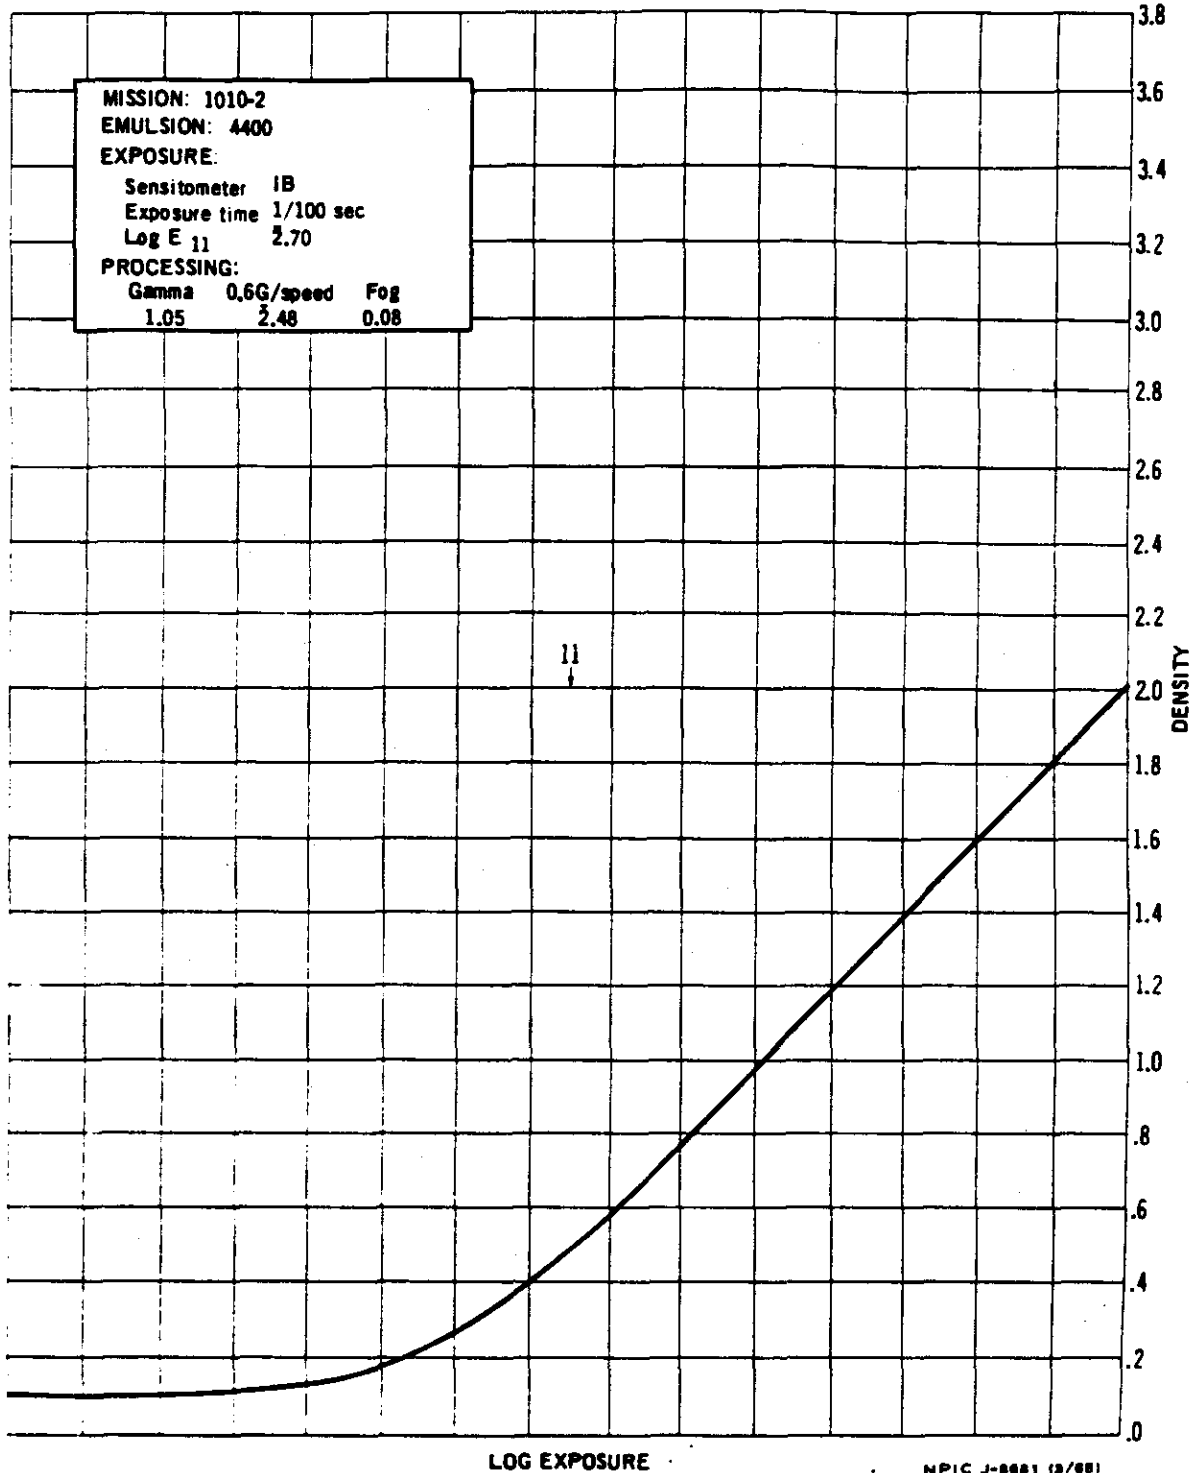



CONTROL CURVE FOR HEAD AND TAIL OF STELLAR MATERIAL

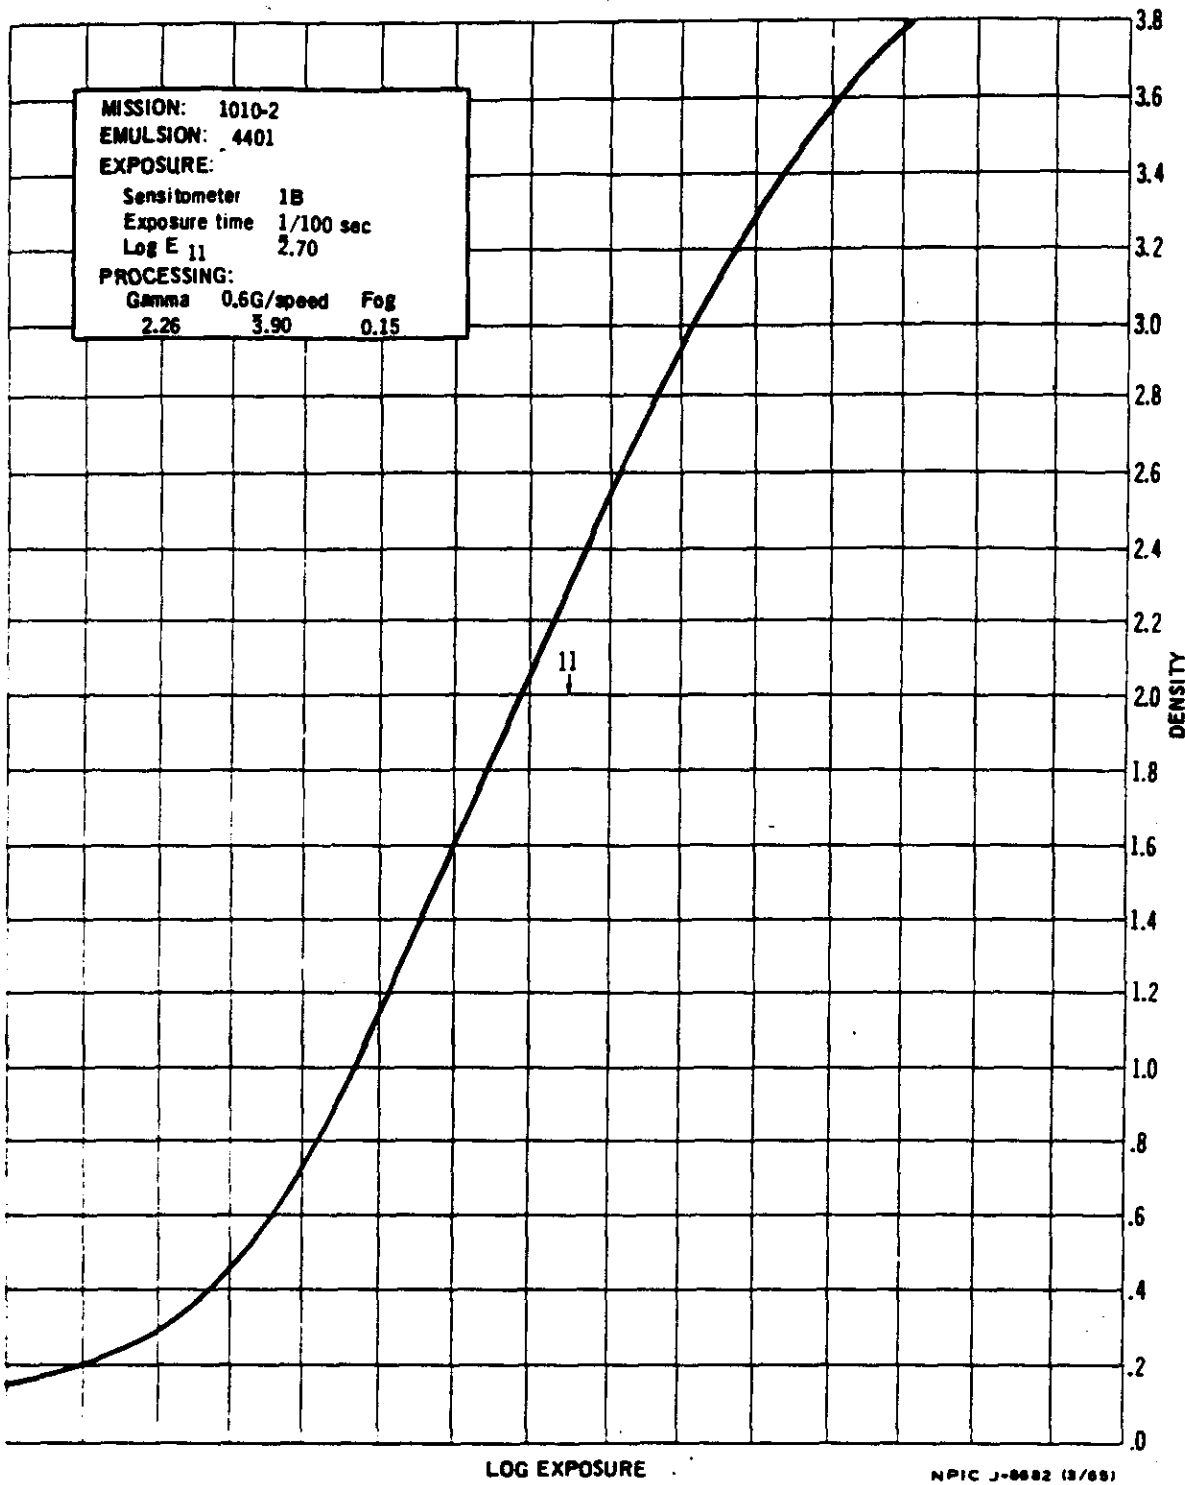

NPIC J-8882 (3/68)





PART III. IMAGE QUALITY

1. Definition of Photographic Interpretation (PI) Suitability

This is an assessment of the information content of photographic reconnaissance material and its interpretability. A number of inter-related factors are involved, such as the quality of the photography, the extent of target coverage, scale, and weather limitations. However, the fundamental criteria for assigning a PI suitability rating may be reduced to (a) the scope of the photographic coverage and (b) the degree to which a photo interpreter may extract useful and reliable information from the material.


PI suitability ratings are categorized as Excellent, Good, Fair, Poor, and Unusable. These ratings refer to the overall interpretive value of the photography obtained from a particular reconnaissance mission, although individual targets may also be assigned PI suitability ratings. The standards that determine assignment of the various ratings are as follows:

Excellent: The photography is free of degradation by camera malfunctions or processing faults and weather conditions are favorable throughout. The imagery contains sharp, well-defined edges and corners with no unusual distortions. Contrast is optimal and shadow details, as well as details in the highlight areas, are readily detectable. Observation of small objects and a high order of mensuration are made possible by the consistently good quality of the photography.

Good: The photography is relatively free of degradation or limiting atmospheric conditions. Edges and corners are well-defined. No unusual distortions are present. Detection and accurate mensuration of small objects are feasible, but to a lesser degree than in material rated as "Excellent."

Fair: Degradation is minimal but the acuity of the photography is less than optimum. Edges and corners are not crisply defined and there is loss of detail in shadow and/or highlight areas. Detection and identification of small objects are possible but accuracy of mensuration is reduced by the fall-off in image quality and the less-than-optimal contrast that prevails.

Poor: Camera-induced degradations and/or weather limitations severely reduce the effectiveness of the photography. Definition of edges and corners is not sharp. Only gross terrain features and culture may be detected or identified and distortion of form may exist. Accurate mensuration of even large objects is doubtful.



Unusable: Degradation of photography completely precludes detection, identification, and mensuration of cultural details.

2. PI Suitability for Mission 1010

The PI suitability of Mission 1010 is good in the areas not degraded by the out-of-focus condition. The imagery within the out-of-focus area ranges from "unusable" to "fair" according to the criteria outlined on the preceding page.

a. The slit width of 0.175 inches used in the panoramic cameras of this mission resulted in slightly less exposure than is rendered with the usual slit width of 0.20 inches. However, image motion effects are less apparent with less effective exposure (a narrow slit) and many individuals in the intelligence community believe photography received from this system is usually overexposed; hence, the exposure experiment. No definite conclusion can be made on the basis of 1 mission, but it does not appear that the film of this mission is underexposed.

b. In relation to the exposure experiment, the photo interpreters report a definite improvement in the imagery displaying high reflectivity. On the other hand, there were a few isolated areas in which some photo interpreters feel there would have been more detail if there had been the usual exposure. The imagery not recorded due to a lack of exposure is an intangible and therefore is impossible to measure, while the gains due to less exposure are readily apparent.

c. Photo interpreters reported on 217 targets in the preliminary read-out of Mission 1010. Of the total, only 6 received a rating of poor. Obliquity, haze and clouds were the cause of degradation. Targets entirely obscured by clouds are not included in the totals.

d. Image streaking along the major axis of the film is present in association with areas of high reflectivity (clouds, beaches, etc.). As stated in prior Photographic Evaluation Reports, the streaking is believed to be reflections within the camera assembly. A design change involving the addition of more baffles in the "stack," which the manufacturer believes will eliminate the streaking, has been approved and will be implemented in the near future.

e. The PI suitability of this mission is affected very little by the minor degradations induced by pinholes, scratches, abrasions, etc. There are 7 manufacturing splices on the panoramic photography of this mission. Each is a definite degradation to PI suitability.

f. Approximately 47 percent of the mission is obscured or degraded by clouds. Cloud shadows are an additional degradation to PI suitability and are proportional to the cloud cover.



g. The first 4 to 6 frames following a camera-on display image motion. The motion (smear) occurs until the camera overcomes inertia and the proper scan rate is accomplished.

h. Samples of highlights of this mission are:

1. Identification of a vertical test stand previously reported as unidentified construction.
2. Detection of a camouflage attempt.
3. Identification of new fixed field launch sites.
4. Identification of a static test facility previously reported as an unidentified facility.
5. Observation and study of an earth satellite tracking facility.



3. Definition of Mission Information Potential (MIP)

The MIP is an arbitrary number not limited by terminal values which is subjectively assigned to the panoramic photography of a mission and which compares it to the other missions. It is meant to be a measure of the camera's maximum capability for recording information, discounting adverse atmospheric conditions, minimal solar elevations, camera malfunctions, or other factors which reduce the quality of the photography.

The MIP is based on the best photography found in a mission, even though the photography may be limited to a few frames. Since these frames are considered to be the best in the mission, they do not indicate the overall success, average quality, or general interpretability of the photography.

Criteria for selection of the MIP frame:

- a. Eliminate all portions of the mission affected by system malfunctions.
- b. Select frames which are free of clouds or atmospheric attenuation.
- c. Eliminate the first 10 frames and last frame of a pass because these may be affected by incorrect scan speed.
- d. Select frames that are in a continuous strip of approximately 10 frames because cloud shadows from weather fronts are cast for great distances.
- e. Determine from the horizon cameras that the panoramic photography is not affected by apparent vehicle perturbations.
- f. Select targets that are near the center of the formats and on frames as close as possible to perigee for scale purposes and to eliminate obliquity.
- g. Select frames having near optimum solar elevation, thus eliminating frames having either overexposure or underexposure.
- h. Select a high contrast target (preferably an airfield) and compare the target to a previous mission which has been given an MIP rating.


4. MIP Rating for Mission 1010-1

Pass 56D, frame 73 AFT, is the MIP frame. A value of 85 has been assigned. This value is equal to the high average attained in recent missions.



5. MIP Rating for Mission 1010-2

Pass 115D, frame 59 AFT, is the MIP frame for photography on Mission 1010-2. The imagery is of approximately the same quality as that of Mission 1010-1. The MIP rating is 85.





6. MIP Ratings of Past Missions

The following is a list of missions and their MIP.

<u>Mission</u>	<u>MIP</u>	<u>Mission</u>	<u>MIP</u>
9009	20	9050	85
9013	30	9051	80
9017	45	9053	90
9019	45	9054	80
9023	65	9056	85
9022	65	9057	85
9025	55	1001-1	80
9028	50	1002-1	80
9029	80	9062	85
9031	70	1004-1	85
9032	85	1004-2	85
9035	75	1006-1	90
9037	80	1006-2	90
9038	85	1007-1	85
9039	85	1007-2	85
9040	75	1008-1	85
9041	85	1008-2	85
9044	85	1009-1	85
9043	85	1009-2	85
9045	80	1010-1	85
9047	80	1010-2	85
9048	80		





APPENDIX A. SYSTEM SPECIFICATIONS

1. Panoramic Cameras

	Master (FWD)	Slave (AFT)
Camera Number	152	153
Lens Serial Number	1252435	1282435
Slit Width	0.175"	0.175"
Filter	Wratten 21	Wratten 21
Operational Focal Length	609.577 mm	609.585 mm
Film Type	4404	4404
Film Length	16,000'	16,000'
Splices	4	4
Emulsion	62-7-6-7-4	62-7-7-4
Static Bench Test		
High Contrast	268 L/mm	243 L/mm
Low Contrast	148 L/mm	139 L/mm
Dynamic Test		
I. High Contrast	159 L/mm	167 L/mm
I. Low Contrast	128 L/mm	128 L/mm
P. High Contrast	185 L/mm	171 L/mm
P. Low Contrast	127 L/mm	110 L/mm
Distortion - Positive (Pincushion)		

Angle Off Axis	3.0°	2.0°	1.0°	0.0°	359°	358°	357°	
Distortion								Camera
Millimeters	.005	.002	.001	.000	.000	.001	.002	152
Distortion								Camera
Millimeters	.006	.003	.002	.000	.001	.003	.006	153



2. Horizon Cameras

Camera	Starboard (Take-Up)	Port (Supply)	Starboard (Supply)	Port (Take-Up)
Camera Number	152	152	153	153
Lens Serial Number	812267	812279	813527	814014
Exposure Time	1/100 sec	1/100 sec	1/100 sec	1/100 sec
Filter	Wratten 25	Wratten 25	Wratten 25	Wratten 25
Aperture	f/8.0	f/6.8	f/8.0	f/6.8
Operational				
Focal Length	54.54 mm	54.43 mm	55.06 mm	55.21 mm
Radial Distortion				
10° off axis	.015 mm	.010 mm	.001 mm	.007 mm
20° off axis	.022 mm	.017 mm	.004 mm	.015 mm
Tangential				
Distortion	Not available	.004 mm	.004 mm	.002 mm

Note:

1. Distortion and resolution are read at equivalent operational focal length.
2. Resolution in lines per mm on SO-132 film and a high contrast target.

3. Camera No D41/41/41 (Mission 1010-1)

	<u>Stellar</u>	<u>Index</u>			
Lens Serial Number	11002	813054			
Reseau Serial Number	41	41			
Filter	None	Wratten 21			
Aperture	f/1.8	f/4.5			
Exposure Time	2.0 sec	1/500 sec			
Equivalent Focal Length	Not available	38.58 mm			
Film Type	4401	4400			
Film Length	78'	105'			
Emulsion	7-3-6-4	28-4-5-4			
Resolution					
Angle Off Axis	0	10	20	30	35
Resolution L/mm	82	98	114	95	90
High Contrast	92	92	96	93	93
Index Awar:	77 L/mm read from 4404 film.				
Alignment:	0.003"/.937"				
	0.007"/2.25"				




4. Camera No 44/46/44 (1010-2)

	<u>Stellar</u>	<u>Index</u>
Lens Serial Number	10701	813059
Reseau Serial Number	46	46
Filter	None	Wratten 21
Aperture	f/1.8	f/4.5
Exposure	2.0 sec	1/500 sec
Equivalent Focal Length	Not available	38.23 mm
Film Type	4401	4400
Film Length	Not reported	Not reported
Emulsion	7-3-6-4	28-4-5-4
Index Resolution:		
Awar: 73.3 L/mm read from 4404 film.		




VEHICLE LAYOUT

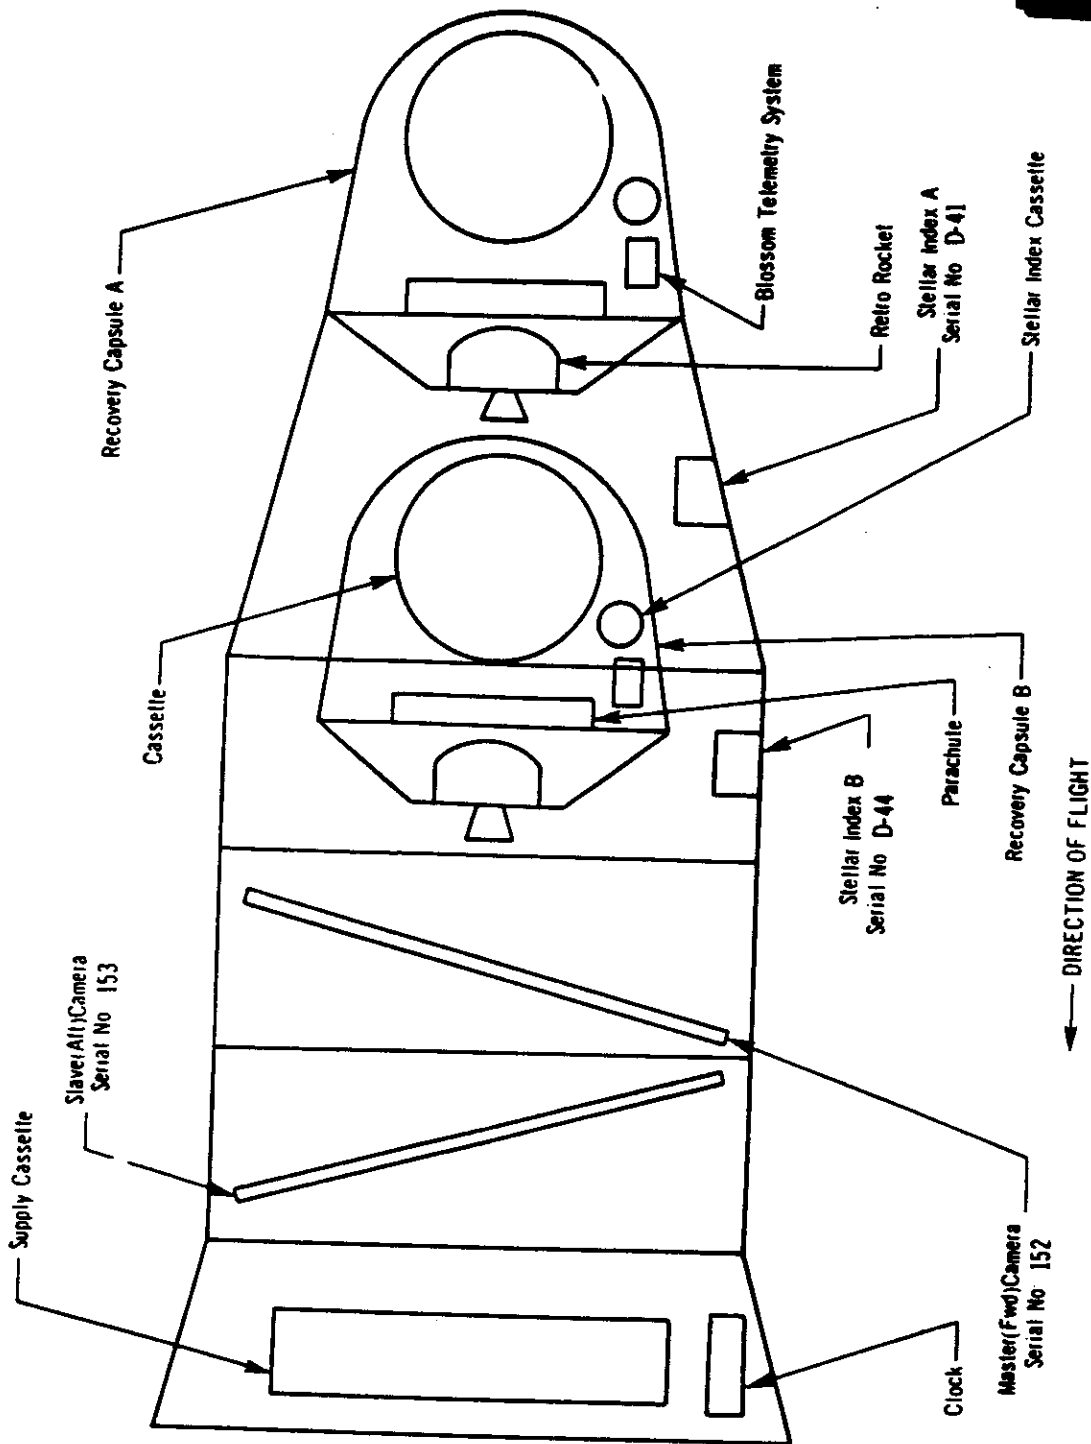

NPIC J-8882 (3/68)



HORIZON LENS SETTINGS
(Viewed from top of vehicle in flight)

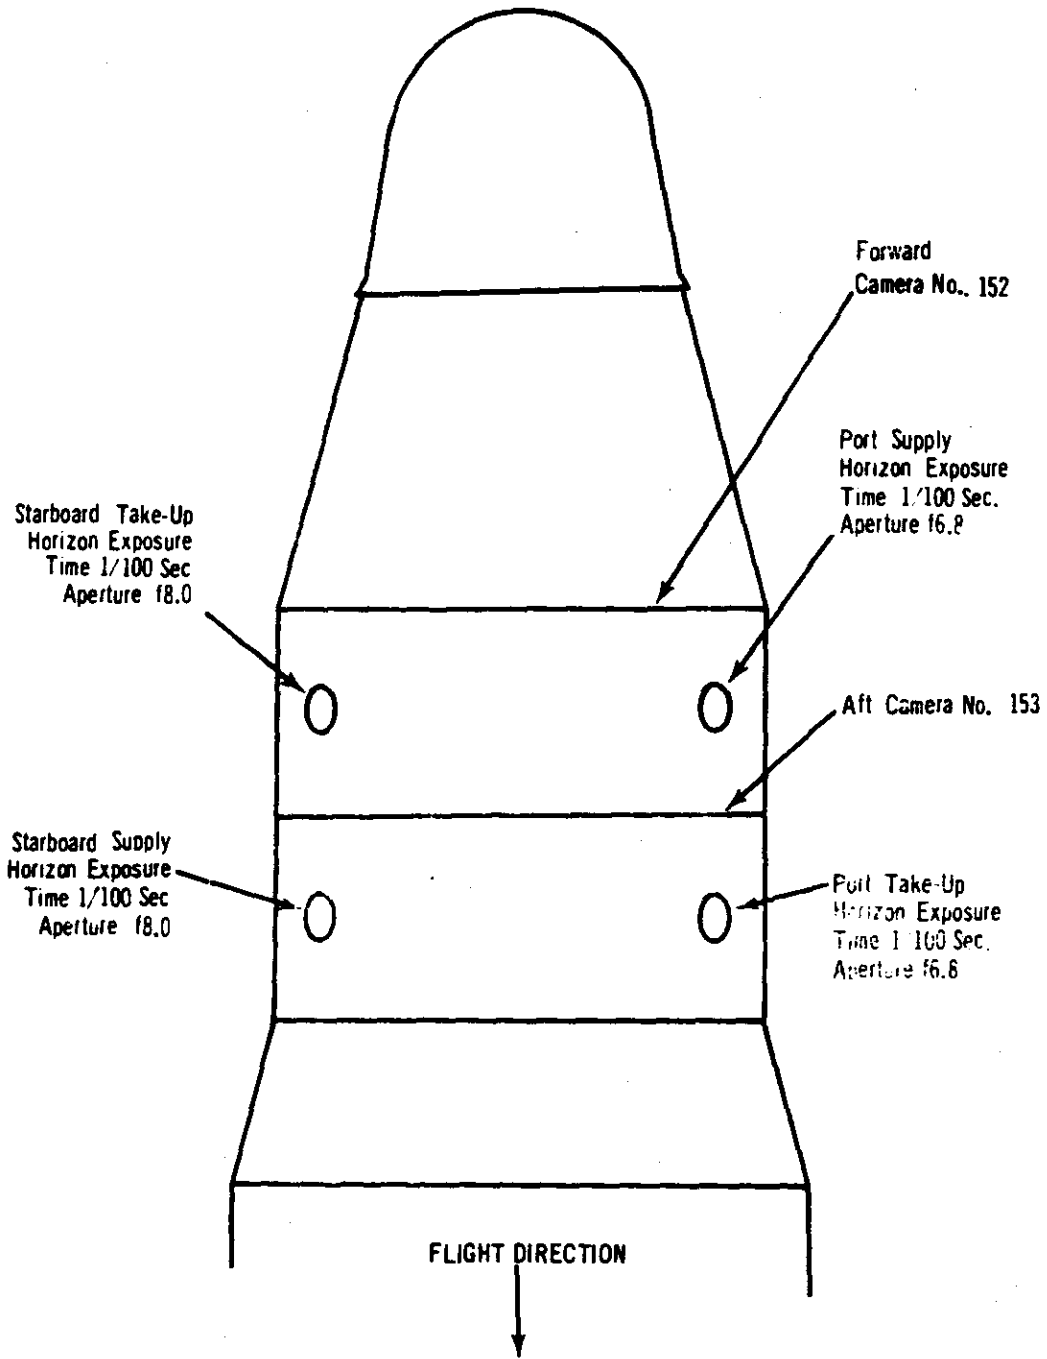

NPIC J-8693 (3/65)



7. Definition of Panoramic Camera Format Calibrations

Measurements are made with respect to collimator targets fixed with respect to the mechanical interface between the total payload assembly and the orbital vehicle.

Two sets, of 3 targets each, are aligned to be coplanar within $+5''$ of arc so positioned to form an angle of $-15.00^\circ +5''$ to the mechanical interface for master camera calibrations and an angle of $+15.00^\circ +5''$ to the mechanical interface for slave camera calibrations.

A. One target, Target 1, of each set is imaged on the Terrain format.

B. The second and third targets of each set are at angles of $75.00^\circ +5''$ from Target 1 and are imaged on the horizon formats.

The indicated center of format for the panoramic cameras is given by the intersection of a line through the center of mass of the central shrinkage marker drawn normal to the edge of format containing the shrinkage marker and a line parallel to the same edge located at a position half-way between the format edges.

The indicated principal points of the horizon cameras are the points of intersection of lines joining opposite fiducials.

Xvo and Yvo are the offsets of Target 1 from the indicated center of format of the panoramic cameras as defined in Paragraph 3.

Xs, Ys and Xt, Yt are the offsets of Targets 2 and 3 from the indicated principal points of the supply and take-up horizon cameras respectively.

The indicated flight direction is the direction of vehicle travel during orbit. The forward edge of format is the edge opposite the shrinkage markers for the master camera and is the edge containing the shrinkage markers for the slave camera.

Dimensions A, B and C are the spacings of the shrinkage markers and dimensions D and E are the spacings of the Y axis fiducials. Techniques for exact measurement of these dimensions have not been developed. The figures quoted are measurements made on hand processed film without control of shrinkage.

The format dimensions are measured to the best estimate of format edge.




Measurement of the angle between the indicated axis of the panoramic cameras and the line of intersection of the plane defined in Paragraph 2 on the format is obtained from the offset dimensions D_{mx} and D_{my} of Target 1 for each camera.

Measurement of the angle between the indicated axis of the horizon cameras and the line of intersection of the plane defined in Paragraph 2 on the format is made by measuring the scan direction offset of the targets defined in Paragraph 2B at a fixed distance from the target center in the Y direction. Dimensions D_{tx} , D_{ty} , D_{sx} and D_{sy} are the offsets of these measurements.



FORMAT CALIBRATIONS

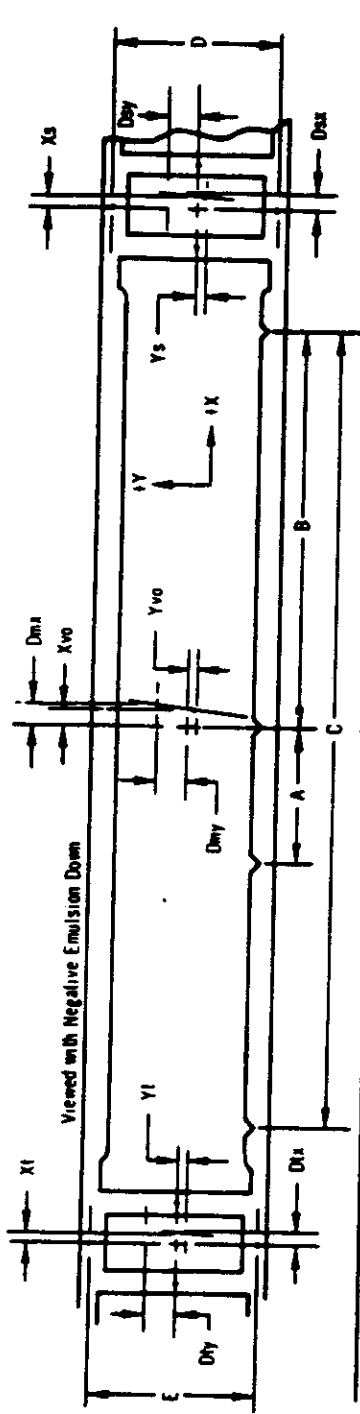

Master f/w0 Camera	Vehicle Motion	Scan Direction	Slave (M1) Camera	Vehicle Motion	Scan Direction
A 76.2	X1 +.217	D1x +.224	A 76.2	X1 +.407	D1x +.407
B 355.4	Y1 +.116	D1y -1.683	B 355.2	Y1 -.154	D1y +1.752
C 710.8	Xs +.335	D2x +.355	C 710.3	Xs -.377	D2x -.377
D 56.542	Ys -.228	D2y +2.625	D 56.508	Ys -.085	D2y -1.664
E 56.538	Xv0 +1.300	D2x +1.306	E 56.450	Xv0 -.212	D2x -.228
	Yv0 +.973	D2y -1.893		Yv0 +.981	D2y -2.619

Format dimensions:

Panoramic	
Height	56.596
Width	754.9


Format dimensions:

Panoramic	
Height	56.505
Width	754.2

- NOTE: 1. All dimensions are in millimeters and are average dimensions of three formats
 2. Height of main format is taken at center of format
 3. D1, D2, X and Y dimensions are taken 10mm above point defining target center
 4. Format Sign Convention

$$\begin{array}{c} -X+Y \\ -X-Y \end{array} \quad \begin{array}{c} +X+Y \\ +X-Y \end{array}$$

FORMAT LAYOUT
(Panoramic Cameras)

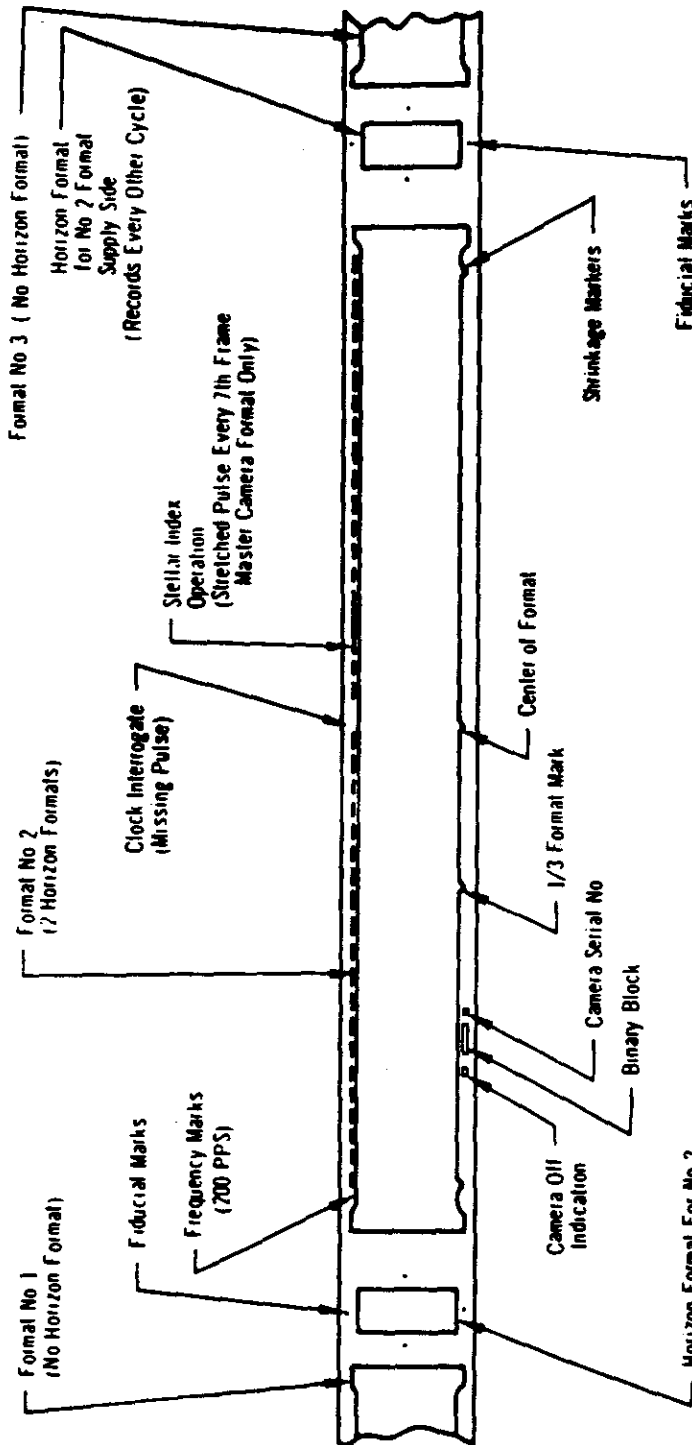

Slave (A/I) Panoramic Camera No 153
Viewed With Negative Emulsion Down
Direction of Film Transport →
Direction of Scan →
Direction of Vehicle Motion →

Master (Fwd) Panoramic Camera No 152
Viewed With Negative Emulsion Down
Direction of Film Transport →
Direction of Scan →
Direction of Vehicle Motion →



APPENDIX B. STELLAR/INDEX AND MASTER CAMERA FRAME CORRELATION


Following is a list of each stellar and index frame and the master panoramic frame each correlates with.





1. Mission 1010-1

Framing Camera Frame Number	Main Camera		Total Frames	Framing Camera Frame Number	Main Camera		Total Frames
	Pass	Frame			Pass	Frame	
0				43	6D	128	
1	1D	6	12	44	6D	135	
2	4D	1		45	6D	142	
3	4D	8		46	6D	149	
4	4D	15		47	6D	156	161
5	4D	22		48	7D	2	
6	4D	29		49	7D	9	
7	4D	36	40	50	7D	16	
8	5D	3		51	7D	23	
9	5D	10		52	7D	30	
10	5D	17		53	7D	37	
11	5D	24		54	7D	44	
12	5D	31		55	7D	51	
13	5D	38		56	7D	58	
14	5D	45		57	7D	65	
15	5D	52		58	7D	72	
16	5D	59		59	7D	79	
17	5D	66		60	7D	86	
18	5D	73		61	7D	93	
19	5D	80		62	7D	100	
20	5D	87		63	7D	107	
21	5D	94		64	7D	114	
22	5D	101		65	7D	121	
23	5D	108		66	7D	128	
24	5D	115	120	67	7D	135	
25	6D	2		68	7D	142	
26	6D	9		69	7D	149	
27	6D	16		70	7D	156	
28	6D	23		71	7D	163	
29	6D	30		72	7D	170	
30	6D	37		73	7D	177	
31	6D	44		74	7D	184	185
32	6D	51		75	9AE	6	9
33	6D	58		76	9D	4	
34	6D	65		77	9D	11	
35	6D	72		78	9D	18	
36	6D	79		79	9D	25	
37	6D	86		80	9D	32	
38	6D	93		81	9D	39	
39	6D	100		82	9D	46	
40	6D	107		83	9D	53	
41	6D	114		84	9D	60	
42	6D	121		85	9D	67	



Mission 1010-1 (Continued)

Framing Camera Frame Number	Main Camera		Total Frames	Framing Camera Frame Number	Main Camera		Total Frames
	Pass	Frame			Pass	Frame	
86	9D	74		129	22D	51	
87	9D	81		130	22D	58	
88	9D	88		131	22D	65	
89	9D	95		132	22D	72	
90	9D	102		133	22D	79	
91	9D	109		134	22D	86	
92	9D	116		135	22D	93	
93	9D	123		136	22D	100	
94	9D	130		137	22D	107	
95	9D	137	140	138	22D	114	
96	21D	4		139	22D	121	
97	21D	11		140	22D	128	132
98	21D	18		141	23D	3	
99	21D	25		142	23D	10	
100	21D	32		143	23D	17	
101	21D	39		144	23D	24	
102	21D	46		145	23D	31	
103	21D	53		146	23D	38	
104	21D	60		147	23D	45	
105	21D	67		148	23D	52	
106	21D	74		149	23D	59	
107	21D	81		150	23D	66	
108	21D	88		151	23D	73	
109	21D	95		152	23D	80	
110	21D	102		153	23D	87	
111	21D	109		154	23D	94	
112	21D	116		155	23D	101	
113	21D	123		156	23D	108	
114	21D	130		157	23D	115	
115	21D	137		158	23D	122	123
116	21D	144		159	25D	6	
117	21D	151		160	25D	13	
118	21D	158		161	25D	20	
119	21D	165		162	25D	27	
120	21D	172		163	25D	34	
121	21D	179	184	164	25D	41	
122	22D	2		165	25D	48	
123	22D	9		166	25D	55	
124	22D	16		167	25D	62	
125	22D	23		168	25D	69	
126	22D	30		169	25D	76	
127	22D	37		170	25D	83	
128	22D	44					



Mission 1010-1 (Continued)

Framing Camera Frame Number	Main Camera		Total Frames	Framing Camera Frame Number	Main Camera		Total Frames
	Pass	Frame			Pass	Frame	
171	25D	90		214	37D	144	
172	25D	97		215	37D	151	
173	25D	104		216	37D	158	158
174	25D	111		217	38D	7	
175	25D	118		218	38D	14	
176	25D	125	128	219	38D	21	
177	31D	4		220	38D	28	
178	31D	11		221	38D	35	
179	31D	18		222	38D	42	
180	31D	25		223	38D	49	
181	31D	32	36	224	38D	56	
182	36D	3		225	38D	63	
183	36D	10		226	38D	70	
184	36D	17		227	38D	77	
185	36D	24		228	38D	84	
186	36D	31		229	38D	91	
187	36D	38		230	38D	98	
188	36D	45		231	38D	105	
189	36D	52		232	38D	112	
190	36D	59		233	38D	119	
191	36D	66		234	38D	126	
192	36D	73		235	38D	133	
193	36D	80	83	236	38D	140	
194	37D	4		237	38D	147	
195	37D	11		238	38D	154	
196	37D	18		239	38D	161	
197	37D	25		240	38D	168	
198	37D	32		241	38D	175	
199	37D	39		242	38D	182	
200	37D	46		243	38D	189	191
201	37D	53		244	39D	5	
202	37D	60		245	39D	12	
203	37D	67		246	39D	19	
204	37D	74		247	39D	26	
205	37D	81		248	39D	33	
206	37D	88		249	39D	40	
207	37D	95		250	39D	47	
208	37D	102		251	39D	54	
209	37D	109		252	39D	61	
210	37D	116		253	39D	68	
211	37D	123		254	39D	75	
212	37D	130		255	39D	82	
213	37D	137		256	39D	89	



Mission 1010-1 (Continued)

Framing Camera Frame Number	Main Camera		Total Frames	Framing Camera Frame Number	Main Camera		Total Frames
	Pass	Frame			Pass	Frame	
257	39D	96		300	41D	85	
258	39D	103		301	41D	92	93
259	39D	110		302	47D	17	
260	39D	117		303	47D	24	
261	39D	124		304	47D	31	
262	39D	131		305	47D	38	40
263	39D	138	142	306	52D	5	
264	40D	3		307	52D	12	
265	40D	10		308	52D	19	
266	40D	17		309	52D	26	
267	40D	24		310	52D	33	
268	40D	31		311	52D	40	
269	40D	38		312	52D	47	
270	40D	45		313	52D	54	
271	40D	52		314	52D	61	
272	40D	59		315	52D	68	
273	40D	66		316	52D	75	
274	40D	73		317	52D	82	
275	40D	80		318	52D	89	
276	40D	87		319	52D	96	102
277	40D	94		320	53D	1	
278	40D	101		321	53D	8	
279	40D	108		322	53D	15	
280	40D	115		323	53D	22	
281	40D	122		324	53D	29	
282	40D	129		325	53D	36	
283	40D	136		326	53D	43	
284	40D	143		327	53D	50	
285	40D	150		328	53D	57	
286	40D	157		329	53D	64	
287	40D	164	170	330	53D	71	
288	41D	1		331	53D	78	
289	41D	8		332	53D	85	
290	41D	15		333	53D	92	
291	41D	22		334	53D	99	
292	41D	29		335	53D	106	
293	41D	36		336	53D	113	
294	41D	43		337	53D	120	
295	41D	50		338	53D	127	
296	41D	57		339	53D	134	
297	41D	64		340	53D	141	
298	41D	71		341	53D	148	
299	41D	78		342	53D	155	





Mission 1010-1 (Continued)

Framing Camera Frame Number	Main Camera		Total Frames	Framing Camera Frame Number	Main Camera		Total Frames
	Pass	Frame			Pass	Frame	
343	53D	162		383	55D	67	
344	53D	169		384	55D	74	
345	53D	176		385	55D	81	
346	53D	183		386	55D	88	
347	53D	190		387	55D	95	
348	53D	197		388	55D	102	
349	53D	204		389	55D	109	
350	53D	211		390	55D	116	
351	53D	218		391	55D	123	
352	53D	225	225	392	55D	130	
353	54D	7		393	55D	137	
354	54D	14		394	55D	144	
355	54D	21		395	55D	151	153
356	54D	28		396	56AE	5	10
357	54D	35		397	56D	2	
358	54D	42		398	56D	9	
359	54D	49		399	56D	16	
360	54D	56		400	56D	23	
361	54D	63		401	56D	30	
362	54D	70		402	56D	37	
363	54D	77		403	56D	44	
364	54D	84		404	56D	51	
365	54D	91		405	56D	58	
366	54D	98		406	56D	65	
367	54D	105		407	56D	72	
368	54D	112		408	56D	79	
369	54D	119		409	56D	86	
370	54D	126		410	56D	93	
371	54D	133		411	56D	100	
372	54D	140		412	56D	107	
373	54D	147	150	413	56D	114	
374	55D	4		414	56D	121	
375	55D	11		415	56D	128	
376	55D	18		416	56D	135	
377	55D	25		417	56D	142	
378	55D	32		418	56D	149	153
379	55D	39		419	61D	3	
380	55D	46		420	61D	10	
381	55D	53		421	61D	17	
382	55D	60		422	61D	24	
				423	61D	31	



Mission 1010-2

Framing Camera Frame Number	Main Camera		Total Frames	Framing Camera Frame Number	Main Camera		Total Frames
	Pass	Frame			Pass	Frame	
1	65D	9		44	69D	172	
2	65D	16	17	45	69D	179	
3	68D	6		46	69D	186	
4	68D	13		47	69D	193	
5	68D	20		48	69D	200	
6	68D	27		49	69D	207	
7	68D	34		50	69D	214	
8	68D	41		51	69D	221	221
9	68D	48		52	70D	7	
10	68D	55		53	70D	14	
11	68D	62		54	70D	21	
12	68D	69		55	70D	28	
13	68D	76		56	70D	35	
14	68D	83		57	70D	42	
15	68D	90		58	70D	49	
16	68D	97		59	70D	56	
17	68D	104		60	70D	63	
18	68D	111		61	70D	70	
19	68D	118	121	62	70D	77	
20	69D	4		63	70D	84	
21	69D	11		64	70D	91	
22	69D	18		65	70D	98	
23	69D	25		66	70D	105	
24	69D	32		67	70D	112	
25	69D	39		68	70D	119	
26	69D	46		69	70D	126	
27	69D	53		70	70D	133	
28	69D	60		71	70D	140	
29	69D	67		72	70D	147	
30	69D	74		73	70D	154	
31	69D	81		74	70D	161	166
32	69D	88		75	71AE	2	
33	69D	95		76	71AE	9	10
34	69D	102		77	71D	6	
35	69D	109		78	71D	13	
36	69D	116		79	71D	20	
37	69D	123		80	71D	27	
38	69D	130		81	71D	34	
39	69D	137		82	71D	41	
40	69D	144		83	71D	48	
41	69D	151		84	71D	55	
42	69D	158		85	71D	62	
43	69D	165		86	71D	69	



Mission 1010-2 (Continued)

Framing Camera Frame Number	Main Camera		Total Frames	Framing Camera Frame Number	Main Camera		Total Frames
	Pass	Frame			Pass	Frame	
87	71D	76		130	84D	209	
88	71D	83		131	84D	216	
89	71D	90		132	84D	223	224
90	71D	97		133	85D	6	
91	71D	104		134	85D	13	
92	71D	111		135	85D	20	
93	71D	118		136	85D	27	
94	71D	125		137	85D	34	
95	71D	132		138	85D	41	
96	71D	139		139	85D	48	
97	71D	146		140	85D	55	
98	71D	153		141	85D	62	
99	71D	160		142	85D	69	
100	71D	168	169	143	85D	76	
101	84D	6		144	85D	83	
102	84D	13		145	85D	90	
103	84D	20		146	85D	97	
104	84D	27		147	85D	104	
105	84D	34		148	85D	111	
106	84D	41		149	85D	118	
107	84D	48		150	85D	125	
108	84D	55		151	85D	132	
109	84D	62		152	85D	139	
110	84D	69		153	85D	146	
111	84D	76		154	85D	153	
112	84D	83		155	85D	160	
113	84D	90		156	85D	167	
114	84D	97		157	85D	174	
115	84D	104		158	85D	181	
116	84D	111		159	85D	188	
117	84D	118		160	85D	195	
118	84D	125		161	85D	202	
119	84D	132		162	85D	209	
120	84D	139		163	85D	216	
121	84D	146		164	85D	223	
122	84D	153		165	85D	230	232
123	84D	160		166	86D	5	
124	84D	167		167	86D	12	
125	84D	174		168	86D	19	
126	84D	181		169	86D	26	
127	84D	188		170	86D	33	
128	84D	195		171	86D	40	
129	84D	202		172	86D	47	

