

Launch Test Directive

PROGRAM 162 CONTRACT AF 04(695)-233

(Title Unclassified)



LMSC 445925-D

DECLASSIFIED IAW B.O. 1958

REVIEWED

BY CO

DATE D



PROGRAM 162

LMSC 445925-D 15 February 1963 Copy No. /7

LAUNCH TEST DIRECTIVE

CONTRACT AF OL (695) .- 233

Approved:

F. E. Gaiser, Manager

Launch Systems Engineering, VAFB Lockheed Missiles & Space Company

Senior LMSC Member

Launch Test Working Group

Approved:

S. M. Abeles

Space Systems Project Engineer, VAFB

Douglas Aircraft Company

Senior DAC Member

Launch Test Working Group

Approved:

Director, Wall Field Station

Bell Telephone Laboratories, Incorporated.

Senior BTL Member

Launch Test Working Group

Approved:

A. Perry, Jr., Colonel, USAF

Deputy Commander Space Systems 6595th Aerospace Test Wing

(Development) AFSC

LOCKHEED AIRCRAFT CORPORATION Missiles and Space Company Vandenberg Air Force Base, California

DOWNGRADED AT 3 YEAR INTERVLAS; DECLASSIFIED AFTER 12 YEARS DOD DIR 5200.10

This Document Contains Information Affecting The National Defense Of The United States Within The Meaning Of The Espionage Laws, Title 18, U.S.C., Sections 793 and 794. Its Transmission Or The Revelation Of Its Contents In Any Manner To An Unauthorized Person Is Prohibited By Law.

This document supersedes Discoverer Flight Test Directive LMSC 445925-C. That document and its associated appendices and tabs should be destroyed in accordance with applicable USAF instruction

Distribution - LMSC 223616-3


MISSILES and SPACE DIVISION

LOCKHEED AIRCRAFT CORPORATION



CONTENTS

| SECTION I | INTRODUCTION | PAGE |
|-------------|--|--------------|
| 1.1 | Contractual Requirement | |
| 1.2 | Purpose | 1-1 |
| 1.3 | Arrangement | 1-1 |
| 1.4 | Changes | 1-1 |
| 1.5 | | 1-1 |
| 1.6 | Relationship to Detailed Test Objectives Other Information Sources | 1-1 1-1 |
| SECTION II | TEST OBJECTIVES | |
| 2.1 | Vident Manager | |
| 2.2 | Flight Mission | 2-1 |
| 2.3 | Definitions | 2-1 |
| 2.4 | Primary Test Objectives | 2-1 |
| 2.5 | Secondary Test Objectives | 2-1 |
| | Vehicle Performance | 2-1 |
| SECTION III | ORGANIZATION | |
| 3.1 | General Information | |
| 3.2 | Launch Control Activities | 3-1 |
| 3.3 | Launch Personnel | 3-1 3-3 |
| SECTION IV | CONFIGURATION | |
| 4.1 | Company 7 7 10 10 10 10 10 10 10 10 10 10 10 10 10 | |
| 4.2 | General Configuration | 4-1 |
| 4.3 | Detailed Vehicle Configuration | 4-4 |
| 4.4 | Detailed Launch Complex Configuration | 4-7 |
| 4,5 | MISSIFE ASSESSOLV MITTAING (MAD) | 4-11 |
| • 1 | Detailed Ground Space Communication System Configuration | 4-11 |
| * | and the second s | |
| SECTION V | VEHICLE LAUNCH PREPARATIONS | |
| 5.1 | General Information | |
| 5.2 | Launch Complex Preparations | 5-1.5 |
| 5.3 5.4 | Test Procedures | 5 - 1 |
| | Satellite Vehicle Work Schemiles | 5-1 |
| 5.5 5.6 | DateLite Vehicle MAR Checkens | 5 - 2 |
| 5.7 | Satellite Vehicle Pad Chaptout | 5 - 2 |
| 5.8 | Booker rad Checkout | 5 -3 |
| 5.9 | AFSSD Evaluation | 5-4 5-1 |
| /• 7 | R Mims Days Activity | 5-4 5-4 |



6595TH TW 63-0717

CY __ OF

CYS



| | CONTENTS (Cont'd) | PAGE |
|--------------|--|--------------|
| SECTION VI | COUNTDOWN AND LAUNCH SEQUENCE | |
| 6.1 | AND LACACH SACUENCE | |
| | Launch Operations doubles a | |
| 6.2 | Launch Operations Control Procedures Countdown | 6-1 |
| 6.3 | Launch Sequence | 6-1 |
| | | 6-1 |
| SECTION VII | LAUNCH CRITERIA | |
| 7.1 | Definition | |
| 7.2 | Source of Leunch Cout | 7-1 |
| 7∙3 | Source of Launch Criteria Information Launch Decision | 7-1 |
| 7.4 | Vehicle Readiness | 7-1 |
| 7.5 | Pad Conditions | 7-1 |
| 7.6 | Photographs a grant | 7-1 |
| 7.7 | Photographic Coverage | 7 - 2 |
| 7.8 | Weather Forecasts and Reports | • |
| 7.9 | weatter Conditions | 7 - 2 |
| 7.10 | Radio Frequency Interference | 7-2 |
| 7.11 | TANKE CLERIANCE | <u>7-5</u> |
| 7.12 | Vehicle Telemetry Readiness | 7- 5 |
| 7.13 | Dystems Readiness | 7 - 5 |
| 7.14 | OLU GUIGANCA Deaddware | 7-6 |
| 1 | Hold Time Limitations | 7- 6 |
| SECTION VIII | LAUNCH INSTRUMENTATION AND LAUNCH DATA | 7-7 |
| 8.1 | General | |
| 8.2 | Launch Instrumentation | 8-1 |
| 8.3 | Launch Date Association | 8-1 |
| 8.4 | Launch Data Acquisition | 8-8 |
| 8.5 | Launch Data Processing | 8-14 |
| | Launch Data Distribution | 8-14 |
| SECTION IX | LAUNCH REPORTS | |
| 9.1 | | |
| 9.2 9.1 | General Information | 4 |
| • | Launch Progress Information | 9-1 |
| 9.3 9.4 | Flash Launch Report | 9-1 |
| • | Final Launch Repowt | 9-1 |
| 9.5 | DAC/VAFB Launch Reports | 9-1 |
| | a securiti nabolita | 9-1 |





LMSC 445925-D

| | FIGURES | |
|--|---|---|
| Number | Title | Page |
| 4-1 4-2 6-1 8-1 | SLV-2A Booster S-OlA Vehicle Integrated Milestone Countdown Chart Pad Camera Stations | 4-2 4-3 6-2 8-5 |
| | of the state of t | |
| | TABLES | |
| 7-1 7-2 8-1 8-2 8-3 8-4 8-5 8-6 8-7 8-8 | Weather Forecast Requirements Wind Shear Analysis, Procedure Engineering Sequential Photographic Requirements Documentary Photographic Requirements Metric Optic Data Requirements PMR Photographic Film Requirements Launch Weather Data Requirements FPS-16 Radar Launch Data Coverage Range Safety Data Coverage Flight Test Launch Data | 7-3 7-4 8-3 8-4 8-6 8-10 8-12 8-13 |





SECTION I

INTRODUCTION

1.1

CONTRACTUAL REQUIREMENT

Lockheed Missiles and Space Company (IMSC) has been assigned responsibility for technical direction of the Program 162, and for the publication of a Launch Test Directive (LTD) to cover each launch in accordance with the provisions of Air Force Contract 04 (695) -233. The LTD is distributed in accordance with directions issued by the 6595th Aerospace Test Wing.

1.2 PURPOSE

The purpose of the LTD is to provide a working document to define objectives, to set forth evaluation criteria and to delineate preparation and support requirements for the pre-launch and launch portion of the flight test. The LTD also provides vehicle and system information to enable more effective participation by support agencies and by the range in a countdown and launch.

1.3 ARRANGEMENT

The basic LTD document will remain substantially the same for all Program 162 launches. Data relating to individual flights will be issued under appropriate tabs as appendices to the LTD.

1.4 CHANGES

Changes are furnished to activities covered in the distribution list as they are published. Changes will be serially numbered and the change number and date of change printed on the change record sheet and on each new page issued for purposes of identification.

1.5 RELATIONSHIP TO SYSTEMS TEST OBJECTIVES (STO)

The ITD utilized the Systems Test Objectives, IMSC 448510-A, issued by IMSC, Sunnyvale as a source document for information and is in agreement with the objectives and general test specifications contained therein.

1.6 OTHER INFORMATION SOURCES

The 6595th Aerospace Test Wing, LMSC, Douglas Aircraft Company, Rocketdyne, Bell Telephone Laboratories, and other agencies provide information for inclusion in this document.





2.1

FLIGHT MISSION

The mission of all Program 162 flights covered by this document is to place satellites carrying designated test payloads on prescribed polar earth orbits and to recover a data capsule ejected from the orbiting satellite.

Program 162 will incorporate basic flight mission profiles as determined by the configuration and objectives of payload selected for evaluation.

2.2

DEFINITIONS

2.2.1

Primary Test Objectives Defined

A primary objective is one for which a test flight is undertaken and must not, therefore, be compromised by any discernible inadequacy of airborne or ground equipment, procedures or personnel. Status changes that jeopardize the accomplishment of a primary objective are sufficient justification to hold, recycle, or terminate the countdown.

2.2.2 Secondary Test Objectives Defined

A secondary objective is one which is of vital concern to the research and development of satellite systems and space technology, but not prerequisite to the attainment of a primary objective. If the accomplishment of any secondary objective appears to be in jeopardy at any time prior to initiation of the booster automatic launch sequence, the countdown may be held or recycled to resolve the difficulty.

2.3 PRIMARY TEST OBJECTIVES

The primary objectives of each flight are:

To place a 162 Satellite, carrying a test payload and with a specified active orbital life capability, on a prescribed near-polar orbit.

To secure adequate telemetered data from the 162 Satellite during its active orbital life for determination of objectives achievement.

To recover a nose-cone capsule, ejected from the satellite by command, after one, two, three, or more lays of active orbital life.

2.4 SECONDARY TEST OBJECTIVES

Secondary test objectives are called out in the S.T.O.

2.5 VEHICLE PERFORMANCE

Vehicle performance necessary to achieve the objectives is set forth in the S.T.O.



LMSC 445925-D

SECTION III

ORGANIZATION

3.1 GENERAL INFORMATION

This section contains information relative to the certain activities, organizations, publications, and personnel connected with launch preparations and launch of the vehicle.

- 3.2 LAUNCH CONTROL ACTIVITIES
- 3.2.1 Headquarters, Air Force Space Systems Division, (AFSSD), Inglewood, California

Over-all control of the program is exercised by Headquarters, AFSSD, Inglewood, California through the System 162 Directorate.

3.2.2 6594th Aerospace Test Wing

The 6594th Aerospace Test Wing located at Sunnyvale is responsible for controlling and coordinating the tracking and vehicle operations during the orbital phase with assistance from the contractors. As System Test Controller, the 6594th ATW performs the following:

Operates the Satellite Control Facilities.

Approves the Orbital Test Directive.

Establishes local operating procedures.

Supports launch base with tracking and telemetry services for checkout, prelaunch countdown operations, the operational readiness of the tracking stations and supporting forces.

Transmits to the launch base a clearance to launch or a directive to hold.

3.2.3 6595th Aerospace Test Wing

The 6595th Aerospace Test Wing located at VAFB is responsible for prelaunch and launch phases of the system test operations with assistance from the contractors.

The 6595th ATW performs the following:

Megociates with PMR for range support.

Conducts launch countdown and launch phase of test.

Operates Launch Operations Control Center (LOCC).

Establishes local standard operating procedures.

Participates in preparation of system standard operating procedures.

Evaluates launch operations and recommends improvements.

Prepares and submits reports as required.





SECTION III

ORGANIZATION (Cont'd)

3.2.4 lst Strategic Aerospace Division, SAC

The Strategic Aerospace Division, with headquarters at VAFB, furnishes logistic support including weather forecasts and aircraft support.

3.2.5 Satellite Test Annex (STA)

The STA, located at Sunnyvale, monitors launch operations, coordinates other system functions with the launch activities, and controls the orbital phase activities of all tracking stations. It is manned by 6594th Aerospace Test Wing and LMSC personnel. Test direction and control of the STA is the responsibility of the Air Force Systems Test Controller, assisted by the LMSC Systems Test Director and technical staffs.

3.2.6 Pacific Missile Range (PMR)

The Pacific Missile Range is a Navy command with headquarters at Pt. Mugu. It provides downrange ship coverage, range safety, metric photography and frequency interference control for launches.

3.2.7 Orbit Test Working Group (OTWG)

The OTWG is composed of members from the 6594th Aerospace Test Wing, LMSC and associate contractors. The 6594th ATW furnishes the group chairman. The group is primarily concerned with Satellite Control Facility operation and those auxiliary facilities required for orbital test. It is responsible for review of system launch and orbit operations, coordination, effects of configuration changes, the resolving of problem areas through specific task sassignments and for post flight operations evaluation. The group meets at Sunnyvale.

3.2.8 Launch Test Working Group (LTMG)

Headquarters AFSSD has assigned authority for launch preparation and countdown planning to the Launch Test Working Group (LTWG), which meets at VAFB. An officer attached to the 6595th Aerospace Test Wing serves as chairman of the group. The 6596th Instrumentation Squadron, Complex Safety Office, Range Support Office, PMR, IMSC/VAFB, DAC/VAFB, WCMR ITT Kellogg, Rocketdyne, BTL, furnish members to the LTWG. The LTWG is the approval authority for the Launch Test Directive, and the Countdown Manual.

3.2.9 Launch Operations Control Center (LOCC)

The LOCC is an Air Force Activity that exercises control and direction of countdown activities at VAFB. IMSC/VAFB assists the Air Force in LOCC operation.



ORGANIZATION (Cont'd)

3.3

LAUNCH PERSONNEL

3.3.1

General Information

Titles and broad statement of responsibilities of launch personnel are set forth in this sub-section.

3.3.2

Systems Test Controller, 6594th Aerospace Test Wing

The Commander 6594th Aerospace Test Wing or his delegated representative is the Systems Test Controller. The Systems Test Controller is stationed in the STA for launch. He coordinates the pre-launch preparations of the satellite control facility. He assumes operational responsibility of the vehicle at lift-off from the Launch Controller and exercises control during flight operations.

3.3.3

Systems Test Director

LMSC representative stationed in the STA for launch. He continuously monitors the countdown, launch and orbit operations and provides technical support to the System Test Controller.

3.3.4

Launch Operations Coordinator, 6595th Aerospace Test Wing

The Launch Operations Coordinator is an officer designated by the 6595th ATW stationed in the LOCC for launch. He exercises over-all direction of the launch area activities. This includes liaison with VAFB and FMR for launch support.

3.3.5

Launch Operations Director, LMSC, VAFB

The LMSC Launch Operations Director is the senior LMSC representative stationed in the LOCC for launch. He renders technical support to the Launch Operations Coordinator during countdown and launch at VAFB.

3.3.6


Launch Controller, 6595th Aerospace Test Wing


The Launch Controller is the 6595th Aerospace Test Wing Test Operations representative stationed in the Control Center. He directs pre-launch vehicle checkout and countdown and coordinates this activity with other elements of the system.

3.3.7

LMSC Launch Conductor

The LMSC Launch Conductor, stationed in the Control Center, directs Lockheed countdown activities according to the Countdown Manual. The LMSC Launch Conductor conducts main steps in the satellite vehicle countdown procedure, verifies their completion, requests necessary holds, and reports progress to the Launch Controller.





SECTION III

ORGANIZATION (Cont'd)

3.3.8 Douglas (DAC) Launch Conductor

The DAC Launch Conductor, stationed in the Control Center directs the DAC countdown activities according to the Countdown Manual. The DAC Launch Conductor conducts main steps in the booster countdown procedure, verifies their completion, requests necessary holds, and reports progress to the Launch Controller.

3.3.9 Bell Telephone Laboratories Test Conductor-BTL

The BTL Test Conductor directs BTL Guidance Equipment countdown activities according to the Countdown Manual. The BTL Test Conductor directs all guidance equipment (ground guidance and missile-borne guidance) readiness tests, verifies their completion, calls necessary holds, and gives final guidance system readiness for launch to the DAC Launch Conductor.

3.3.10 Launch Complex Safety Officer


Complex safety for the 75-X Complexes is under the control of the 6595th Aerospace Test Wing. The 6595th ATW complex safety control is exercised through the Launch Complex Safety Officer, supported by the 1st STRATAD. Complex safety information is provided in the "Pad Safety Report" published by LMSC. These documents include information and safety precautions relating to clearance distance, criteria, procedures, propellants, ordnance items and pressures for both booster and satellite. Launch recovery and abort procedures are briefly covered in the Countdown Manual and are more thoroughly set forth in separate DAC and LMSC publications for booster and satellite, respectively.

3.3.11 Missile Flight Safety Officer (MFSO)

Flight safety for the 75-X Complexes is under the control of the FMR Missile Flight Safety Officer (MFSO). The MFSO monitors the launch from the Range Operations Center, requests countdown holds for range clearance, and commands destruct of errant missiles.

Range safety information will be provided in the PMR Range Safety Plan and in an LMSC document entitled "Range Safety Report", issued by LMSC, Sunnyvale 35 days prior to launch. Late revisions are transmitted in a "Range Safety TWX" by LMSC, Sunnyvale. The report covers the nominal predicted flight, dispersion patterns and the assumed types of malfunctions that might occur during ascent phase to booster burnout. Additional DAC range information is contained in Douglas report SM-37963, DM-21 Range Safety System issued in November 1960.





SECTION III


ORGANIZATION (Cont'd)

3.3.12

Other Launch Personnel

The designations and tasks of other Air Force, LMSC, DAC, BIL and VIS personnel participating in launch preparations and launch at the launch complex are set forth in the Countdown Manual.





SECTION IV

CONFIGURATION

4.1 GENERAL CONFIGURATION

Systems configuration for Program 162 is set forth in the Systems Test Objectives, IMSC 448510-A. It is briefly covered in this section,

4.1.1 Vehicle Configuration

Vehicles for the 162 Program consist of DAC SIN-2 or SIN-2A boosters mated to DAGC S-01 or S-01A satellite vehicles equipped with recoverable payloads. The tabs indicate the serial numbers of the booster-satellite vehicle combination. Figures 4-1 and 4-2 show booster and satellite vehicle.

4.1.2 Launch Operations Complex

The VAFB complex has the following major launch preparation and launch facilities:

DAC Receipt, Inspection and Maintenance (RIM) Building for receipt, storage and pre-launch-pad checkout of the booster.

The Missile Assembly Building (MAB) for receipt, storage and pre-launch-pad checkout of the satellite vehicle.

The SS/L Laboratory Building for payload receipt, storage and pre-launch-pad tests.

Launch Complex 75-1 with Pads 1 and 2 and Launch Complex 75-3 with Pads 4 and 5. Each complex has a control center and AGE for remote control of vehicle servicing, checkout and launch.

4.1.3 Ground-Space Communications System

The ground-space communication tracking and data system serving the launch phase is composed of the following major facilities:

Vandenberg Tracking Station


BTL Ground Guidance Station

PMR Optical and Radar Tracking System

PMR Missile Flight Safety System

Downrange Telemetry Ship



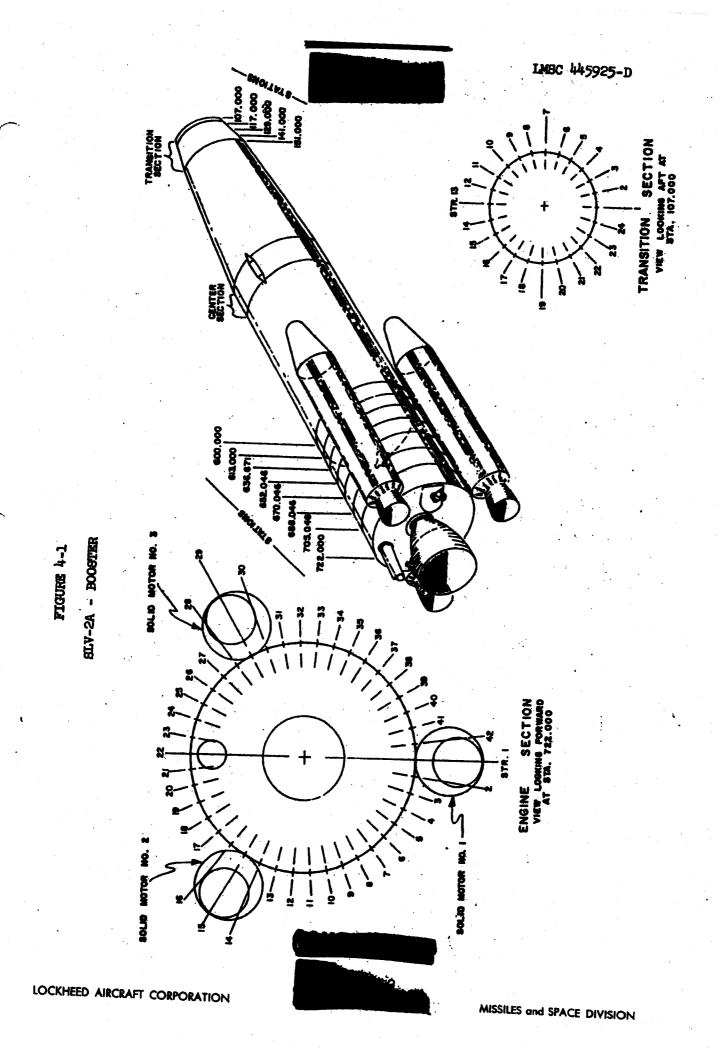






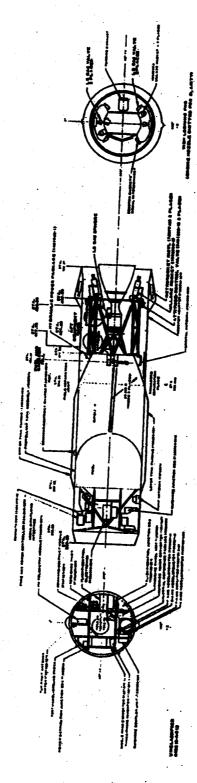



Figure 4-2 S-01A VEHICLE



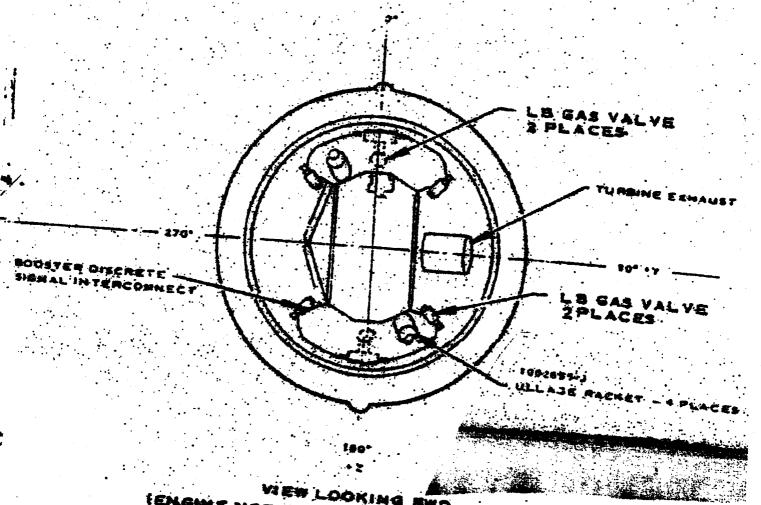


SENGING BUD SOR CLARIT

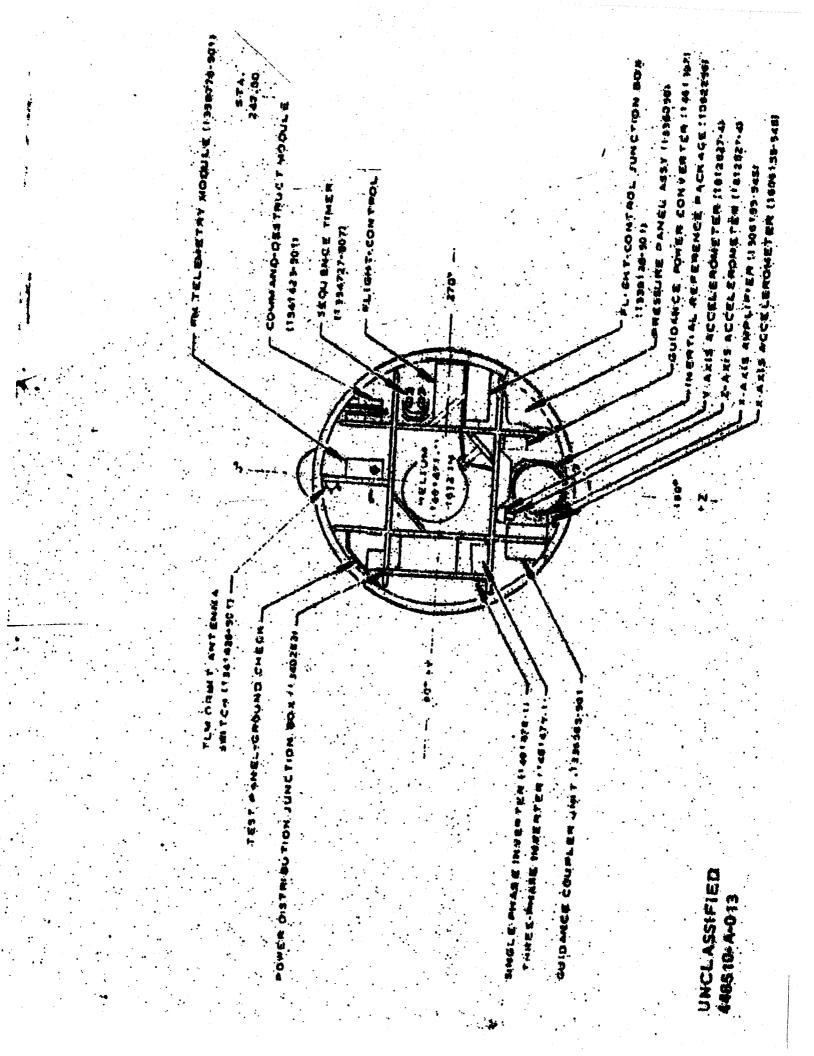

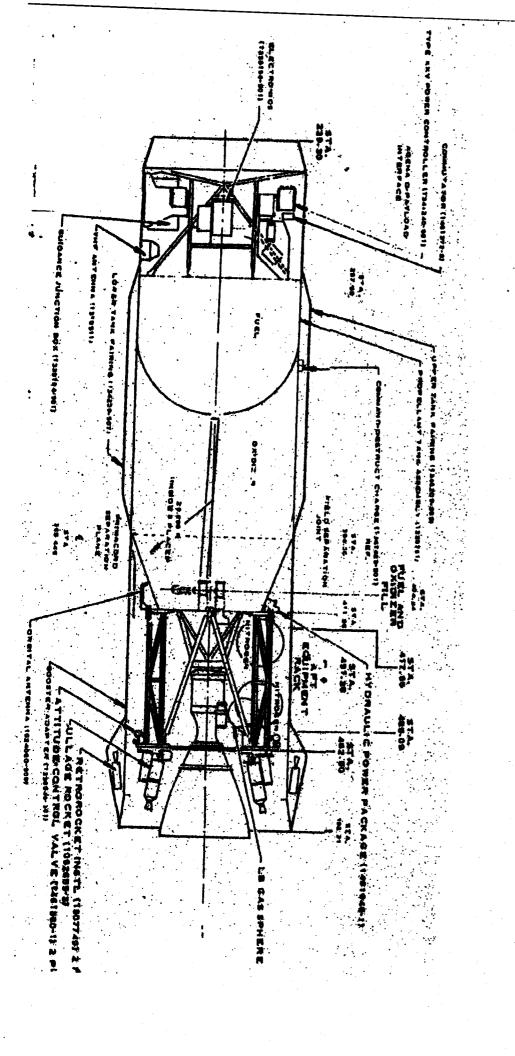

.

1



4.1.4 Ground Communication System

The ground communication system consists of teletype, voice conference line and direct (hot) line systems, plus high frequency radio and microwave systems for off-base communications. Operational intercom, administrative dial and public announcing systems are provided for local communications.

4.2 DETAILED VEHICLE CONFIGURATION

The following subparagraphs contain a brief description of booster and satellite vehicle components.

4.2.1 Booster Configuration


The design of the booster has been adapted from the DM-21 (PG-2A) space vehicle. Design criteria of the SIN-2A booster are outlined in "Production and Acceptance Specification DS-2340" dated 31 August 1962. The top drawing number is 1A36317.

4.2.1.1 Airframe

The general arrangement of the SIV-2A booster is a central airframe with three solid-propellant rocket motors attached externally to the aft end. The airframe consists of a cylindrical two-tank structure with a base diameter of 8 feet; and a forward conical section, the diameter of which tapers from 8 to 5.33 feet. The lox tank vent includes an elbow assembly to direct gas diffusion after MECO, and to prevent chilling of the solid motors when the tank is vented in the terminal countdown. The engine section of the SIV-2A booster has thicker skin than SIV-2 which will be used for designated Program 162 vehicles. The ejection tracks for the solid motors have been added. Additional thrust ribs strengthen the skirt between the lox tank and the engine section. Cork insulation has been added to the surface of the base of the engine section and to the ejection tracks.

4.2.1.2 Propulsion System

The propulsion system consists of a gimballed Rocketdyne YIR -79-13 baffled main engine, two Rocketdyne IR-101-11 liquid-propellant vernier engines, and three solid propellant Thiokol TX33-52 rocket motors. The liquid propellant system is designated MB-3, Block III. The main engine is rated at 170,000 pounds thrust (+ 3 per cent) at sea level; each vernier engine at 1,040 pounds of thrust (+ 3 per cent) at sea level; and each solid propellant motor at 52,600 pounds of thrust (+ 10 per cent) at sea level. The propulsion system also includes two main propellant tanks, a gas generator, a turbopump, propellant lines and associated plumbing. Propellants for the main and vernier engines are liquid oxygen (lox) and RJ-1 fuel (a kerosene-like hydrocarbon). The solid propellant for the TX33-52 motors is polybutadiene acrylic acid co-polymer (PBAA) as the fuel,





4.2.1.2

Propulsion Syl

and ammonium perchlorate with 14 per cent aluminum as the oxidizer. The main engine gimbals to provide pitch and yaw attitude control; the vernier engines provide roll stabilization. The solid motors do not gimbal.

4.2.1.3 Solid Motors

Each solid motor of the SLV-2A booster is 31 inches in diameter and 237 inches in length. The total weight of each solid moter is approximately 8,796 pounds, of which 7,313 pounds are propellant. The case is of 4130 steel with internal insulation. The forward dome is hemispherical, with an opening for the pyregen igniter. The igniter is actuated by signal from the fuel injector pressure switches on the main engine. When fuel injector pressure reaches the required level, a relay actuates igniters in the pyrogen unit, and flame is expelled into the bore of the solid moter, igniting the tips of the webbing. With propellant at 60 degrees Fahrenheit, the nominal burning duration is 27.8 seconds through the web. The total burning duration is 41.1 seconds at that temperature. At 60 deg F, initial thrust is predicted as 52,600 pounds; average thrust throughout the burning is 39,600 pounds.

4.2.1.4 Solid Motor Nose Cone

Each solid motor is fitted with an aluminum mose cone, which tapers from 31 inches to 0 over a length of 61 inches.

4.2.1.5 Solid Motor Suspension and Release

A thrust ball extends from the upper end of the solid motor case to transmit thrust to the vehicle. The ball fits into a secket on the beester at the transition between the lox tank and the engine section. Flanges on the ball and socket are clamped together in a retaining ring, which is tightened with an explosive bolt. Sway braces next to the ball restrict lateral movement of the solid motor. An ejection link between the solid motor and the booster base will direct the motor away from the booster when it is ejected. The bottom of the solid motor includes an ejection beam, which fits with an ejection rail at the bottom of the engine section. The rail is angled to slide the selid motor away from the beoster after ejection.

4.2.1.6 Control System

The booster autopilot system is designed to stabilize and control the booster during powered flight. The major components of the system are the flight controller, the rate gyros, the hydraulic actuators, and the electrical power


4.2.1.7 Guidance System

BTL Series 400 Missile Borne Guidance Equipment decodes the steering and discrete commands transmitted by BTL Ground Guidance Station and routes them to the booster or satellite vehicle as required.

4.2.1.7 Electrical Equipment

In addition to the flight contro equipment includes: A Bendix in kilovolt-amperes), one Yardney 2 instrumentation battery for each LOCKHEED AIRCRAFT CORPORATION

RT-45 rate gyros, electrical o, three phase, 400 cps, 1.5 It battery for booster control power, one d associated wiring. The MISSILES and SPACE DIVISION



4.2.1.7 Electrical Equipment (Cont'd)

inverter supplies ac power to the flight controller. The missile control battery is the primary power for the engine relay box circuits, the flight controller, the rate gyros, and the inverter.

4.2.1.8 Hydro-Mechanical Equipment

Hydro-mechanical equipment provides the motive power for gimbaling the engines in response to commands from the flight controller. During pre-flight checkout and launch, a ground system brings hydraulic pressures up to in-flight levels, and allows checkout of the control system. In flight, hydraulic pressures are maintained by a pump powered by the gas generator.

4.2.1.9 In Flight Hydraulics

The hydraulic pump and the hydraulic accessory unit, which includes a reservoir and accumulator system, maintain the in-flight hydraulic supply at a pressure of 3,000 psia for the demands of the engine actuators. Control equipment includes two main hydraulic actuator assemblies, two vernier pitch/roll actuator assemblies and two vernier yaw actuator assemblies. The major components of the actuators are the servo valve, the cylinder assembly, and the position feedback potentiometer.

4.2.2 Satellite Vehicle Configuration

The satellite vehicle consists of a basic S-Ol or S-OlA vehicle into which a Program 162 payload and special Geophysics Research Directorate (GRD) equipments are installed. The satellite vehicle is composed of the following subsystems: Subsystem A the spaceframe, Subsystem B the propulsion system, Subsystem C the electrical power system, Subsystem D the guidance and control systems and Subsystem H the airborne ground/space communications system. The payload is carried in the forward end of the satellite vehicle and covered by the nose cone. These components are briefly described in the following subparagraphs. A more thorough description of the S-OlA vehicle is set forth in the Vehicle Familiarization Manual, IMSC A075695. The applicable equipment list sets forth vehicle components.


4.2.2.1 Subsystem A - Spaceframe

The satellite spaceframe, Subsystem A, consists of a nose section which houses the payload and is jetisoned for orbit, a forward body containing equipment racks, midbody consisting of propellant tanks and aft body with more equipment racks and the booster adapter which covers aft vehicle components and attaches to the booster. The spaceframe provides the aerodynamic shape for the satellite.

4.2.2.2 Subsystem B - Propulsion

The propulsion system consists of a Bell Aircraft liquid rocket engine, propellant feed and pressurization systems. It develops about 16,000 lbs thrust. The propulsion system uses UDMH for fuel and IRFMA for oxidizer.





4.2.2.3

Subsystem C Internal Electrical Power

This subsystem supplies electrical power needed to operate satellite equipment. It consists of primary batteries; a three phase, 400 cycle, 115 volt inverter; a single phase, 400 cycle, 115 volt inverter; regulators, circuitry and associated equipment.

4.2.2.4 Subsystem D - Guidance and Control

Subsystem D directs the flight along a prescribed path in a controlled attitude according to a timed program by means of engine gimbaling and guidance gas jets. SS/D consists of a computer, an internal reference package, horizon sensors, flight control electronics package, pneumatic control system, hydraulic control system and secondary junction box.

4.2.2.5 Subsystem H - Ground Space Communications

This subsystem consists of RF receivers, transmitters and associated components. It transmits satellite status telemetry to the ground station and receives command signals from ground stations and sends verifications in response to accepted signals.

4.2.2.6 Subsystem J - Geophysics Research Directorate Equipment

This subsystem consists of instrumentation for conducting experiments and obtaining telemetered outer space data of interest to the Directorate.

4-3 DETAILED LAUNCH COMPLEX CONFIGURATION


The two launch complexes used for Program 162, 75-1 and 75-3, each have a Control Center Building connected to the launch pads by long run cables. Each of the four pads, 1 and 2 for Complex 75-1 and 4 and 5 for 75-3, is equipped with mechanical and electrical support equipment for vehicle servicing and checkout.


4.3.1 DAC Support Equipment

The configuration of DAC tactical support equipment has been modified to accommodate satellite vehicle launches. The equipment retains the capability of automatic checkout and launch preparation which are part of tactical system design. The components are briefly described in the following paragraphs.

4.3.1.1 Erecting - Launching Mount

The erecting-launching mount provides both the means of erecting the vehicle and the base from which it can be fired. The mount itself is supplemented by a hydraulic pumping unit and an erector-transporter boom. The mount is an adjustable, steel, support structure which is bolted to a prepared steel and concrete sub-structure. It serves as a pedestal for the vehicle and as a support for the service cables and ducts to the vehicle.





4.3.1.1 Erecting - Launching Mount (Cont'd)

When joined to the erecting-launching mount, the erector-transporter is used to raise the vehicle to the vertical position; detached, it serves as a vehicle for transporting the booster. The erector-transporter is disconnected after the booster has been raised in preparation for the countdown.

4.3.1.2 Solid Motor Transporter-Erector

The solid motor transporter/erector is a four-wheel mobile trailer which serves as an erector to raise the solid motor into vertical position. It also provides for access to work areas on the solid motors.

4.3.1.3 Missile Hydraulic Ground System

Ground hydraulic pressures are provided from the ground supply hydraulic console in the hydro-pneumatic trailer (HPT). Hydraulic lines lead into the engine section of the booster and to the hydraulic accessory unit, from which hydraulic pressure is rationed on demand for the control system checkout. At liftoff, quick-disconnect couplings release the ground supply, check and relief valves isolate the ground supply and return lines, and the booster control system begins to function on internal hydraulic power.

4.3.1.4 AGE Hydraulics

Launcher hydraulics actuate during three events in pre-flight and launch: early in pre-flight procedures, the erector actuator equipment powers the vehicle erection; in the task countdown, the erector actuator equipment lowers the transporter-erector; and at liftoff the umbilical mast flag actuator equipment operates to retract the flag.


4.3.1.5 Air Conditioning

During a countdown, air conditioning equipment maintains a continuous supply either of heated air (at 1,000 cubic feet per minute) or of a heated air/nitrogen mixture (at 200/400 cubic feet per minute) in the engine section of the booster. During Phases I and II of the terminal countdown, heated air is circulated to prepare for the cooling effects of lox loading. When propellant transfer starts, a heated air-nitrogen mixture is furnished to minimize the possibility of fire resulting from lox or fuel leakage and to maintain the temperature of the engine section above zero Fahrenheit.

4.3.1.6 Propellant Transfer System

The propellant transfer system stores liquid oxygen and RJ-1 fuel; on command, it loads the propellants and compressed nitrogen gas into the booster.

The lox transfer equipment includes: a storage tank, a valve complex, the main transfer line, and gaseous nitrogen storage and transfer equipment. Fuel transfer equipment includes: a storage tank, a valve complex, and the gaseous nitrogen storage and transfer equipment. Supplementary equipment includes: a filtering and de-watering units a newer driven reciprocating compressor, a vacuum pump, and supporting elements.



4.3.1.7 Water System

The water system provides fire protection for the launch emplacement. It is a "Fail Wet" system, which includes a deck flush, the launcher Firex, and the revetment Firex equipment. Each system can be controlled independently from the instrumentation and facilities (IMF or FCMM) console in the blockhouse. Water flow is controlled remotely by solenoid-operated valves.

4.3.1.8 Cooling Water (Flame Deflector)

The water system at the 75-1 complex includes cooling water for the flame deflector. The system is activated manually during phase V of the countdown. The initial flow rate, 7,500 gpm, is reduced to 1,500 gpm when the launcher

4.3.1.9 Service Tower

A service tower is installed at launch pad 1. The tower will not be used for Program 162 launches.

4.3.1.10 Electrical Trailers


The electrical equipment and missile checkout trailers contain power supplies for the launch operations, circuits for checking and monitoring various booster equipment, and circuits for controlling the countdown sequence and indicating malfunctions. Trailer-mounted, diesel-engine generator sets provide 480-volt power through a power switchboard. The power is distributed to the control area utility receptacles, and to the skid-mounted power switchboards. The switchboards distribute all power to various loads in the trailers, the vehicle and the blockhouse.


4.3.1.11 Control Center Electrical Equipment

Consoles in the Control Center for Douglas equipment include: instrumentation and facilities (RF or PCMM), which monitors propellant transfer, fire protection, and other similar launch activities; flowmeter, which monitors fuel loading; systems monitor, which indicates malfunctions, controls the launch, and provides for manually over-riding events in the automatic sequence; the government-furnished operation and control (O&C) console, which provides for checkout of the range safety equipment, for supplying external power to the booster, for transferring from external to internal power as appropriate in the countdown, and for initiating the calibration sequence for sub-carrier oscillators; and spin motor monitor, which monitors the spin motors in the HIG and rate gyros.

4.3.2 IMSC Support Equipment

IMSC utilizes both permanently installed and movable support equipment at the launch complexes for satellite vehicle servicing and checkout. The components are briefly described in the following paragraphs.





4.3.2.1 Launch Control Consoles

The launch control system consoles are a group of consoles in the Control Center. They are used for remotely controlling checkout of vehicle subsystems. Fueling and pressurization of the satellite vehicle can be controlled from the ICS consoles. Vehicle responses to ICS stimuli, temperatures, voltage, pressure, etc., readings are visually displayed on the consoles and recorded on associated recorders. Long run cables connect the equipment to the launch pads. In addition to IMSC and IMC consoles, the 6595th ATW has consoles for the launch controller and the safety officer.

4.3.2.2 Pad Electrical Trailers

The pad electrical trailers contain power supplies for pad electrical equipment and interconnect boxes for cable termination and routing. The electrical umbilical, test plug cables, and long run cables are routed to the pad electrical trailer.

4.3.2.3 Gas Storage Equipment

The gas storage consists of helium storage tanks and guidance gas storage : tanks for serving the satellite vehicle. Hitrogen for AGE usage is obtained from DAC sources.

4.3.2.4 Gas Transfer Equipment

The helium is piped to a cabinet where the tank pressure is reduced from about 6000 PSIG to about 4000 PSIG. It then flows to the pneumatic cabinet where the pressure and transfer to vehicle storage spheres and propellant transfer system are controlled.

Guidance gas passes from the trailer to the pneumatic cabinet where flow to the vehicle guidance gas storage tanks is regulated.


The N_2 gas supply for QD actuation and other AGE purposes is also regulated and distributed through the pneumatic cabinet.

4.3.2.5 RF Equipment

An RF console processes signals received through the mast coaxial cables leading to the satellite vehicle. The RF signals are routed to an antenna array for transmission to the MAB and VTS.

4.3.2.6 High Lift Crane

A high lift crane equipped with work platform is used to manually service the satellite vehicle when it is erected.





4.4 MISSILE ASSEMBLY BUILDING (MAB)

The MAB houses IMSC/VAFB offices and satellite vehicle checkout space. It contains the following checkout areas:

SS/A Area for vehicle and component checkout

SS/D Area and Laboratory for guidance system checkout

SS/H Telemetry Laboratory for bench checking telemetry components

Data and Analog Stations

Ground Station and Computer Laboratory

4.5 DETAILED GROUND SPACE COMMUNICATION SYSTEM CONFIGURATION

The following subparagraphs contain a brief description of the ground-space communication system.

4.5.1 Vandenberg Tracking Station (VTS)

The VTS, also referred to as the Vandenberg Station, is the principle element in the ground space communication link. It is located on Casmalia Hill about $7\frac{1}{2}$ miles east of the 162 launch complexes.

The VTS performs the following functions:

Participates in pre-launch RF checkout

Commands the satellite vehicle

Tracks the vehicle

Receives, records, and processes telemetry


Transmits data to STA via microwave and TWX

The entenna systems and their related equipment perform the following launch and ascent functions:

The VERIORT antenna tracks the vehicle and interrogates the satellite beacon.

The TIM-18 antenna acquires telemetry sent by the satellite vehicle PAM/FM and FM/FM from liftoff to loss of signal.





4.5.1

Vandenberg Tracking Station (VTS) (Cont'd)

The T and D antenna is capable of Doppler tracking the vehicle.

The angle tracking antenna tracks the vehicle.

4.5.2

BIL Command Guidance System

The BTL command guidance system consists of a precise, ground-based guidance radar, a Remington-Rand-Univac (RRU) "Athena" Computer, and a Series 400 Missile Borne Guidance Equipment (MBGE) set. Booster position is determined by the guidance radar as the radar tracks the missile. This position information is fed into the RRU Computer. In the computer, the booster position, as determined by the radar, is continuously compared with the planned trajectory.

From the computer, the steering orders and discrete commands are fed to ground radar, where they provide intelligence to the signal sent to the MBGE.

After processing by the MBGE, the steering orders and discrete commands are fed to guidance control equipment in the missile. Response of the MBGE to orders and commands sent from the ground guidance radar are monitored by telemetry.

4.5.3 PMR Optical and Radar Tracking System

The PMR fixed and mobile tracking units (MOTU) provide optical photographic and tracking coverage through motion picture cameras and Askania cinetheodolites. Short range radar tracking is provided by M-33 and SPW radars near the launch site. Long range tracking is provided by FPS-16 and MPS-19 radars located at Pt. Arguelle, Pt. Mugu, and San Nicelas Island.

4.5.4 PMR Missile Flight Safety System (MFSS)

The MFSS utilizes facilities at VAFB and PMR to provide information to the Missile Flight Safety Officer at the BMF Range Operations Building. That building is the focal point for system readouts and is where destruct command of errent missiles originates. Major equipment of the range safety system consists of the following:

Vertical wire sky screens and electronic sky screens (FPM-33)

SPM, M-33, MPS-19 and FPS-16 radars for skin tracking

COTAR in conjunction woth beoster telemetry

Optical trackers

Command destruct transmitters

4.5.5

Telemetry Ship

The telemetry ship under the command of PMR is stationed at a prescribed distance down range to cover the hoest phase of the vehicle, coast and engine burn of the satellite. The ship for angle and range data. Quad-helix antenna is used for Booker phase of the vehicle, coast and engine for angle and range data. As are transmitted to the STA versions. The same data and telemetry on magnetic tape for carrier delta.



SECTION V

VEHICLE LAUNCH PREPARATIONS

5.1

GENERAL INFORMATION

Applicable DAC and IMSC test procedures contain details of booster and satellite vehicle tests and checks performed in the RIM, in the MAB and at the launch pad. In preparation for the flight, subsystem, system, and validation tests are performed on the booster, satellite vehicle and associated AGE and support systems as established by the IMWG. The contractor demonstrates material readiness by these checks to a 6595th ATW representative. The 6595th ATW representative and appropriate senior launch engineers will review the results of these tests. The 6595th ATW then makes final determination of technical readiness of the systems for the flight. Validation checks will include flight control, destruct, DAC propellant flow, and the countdown and flight systems test.

5.2 LAUNCH COMPLEX PREPARATIONS

The pad is cleaned up and damaged material replaced after the preceding launch. Modifications to AGE are made, if necessary, to conform to different vehicle configurations. Electrical and mechanical checks are made to insure AGE readiness to receive booster and satellite vehicle.

5.3 TEST PROCEDURES

5.3.1 Booster Test Procedures


Test procedures for readying the booster for launch are prepared by DAC.


5.3.2 Satellite Vehicle Test Procedures

Procedures for satellite vehicle tests to be performed at VAFB are prepared by IMSC/VAFB in accordance with test requirements established by IMSC, Sunnyvale and the USAF. Test procedure numbers are furnished to IMSC, Sunnyvale for inclusion in the Vehicle Test Plan.

5.3.2.1 Satellite Vehicle Test Plan

Vehicle Test Plans are issued for each vehicle under IMSC, Sunnyvale drawing numbers. The plans reflect program requirements and specify the engineering tests required for each vehicle. The documents carry a brief reference to component tests, manufacturing procedures, and final assembly procedures. Systems tests at IMSC, Sunnyvale and tests at IMSC/VAFB are covered in more detail. The applicable procedures for VAFB tests are listed and a brief description of each test is given. There are about 40 test procedures covering VAFB MAB and pad vehicle checkout.





5.3.2.1

Satellite Vehicle Test Plan (Cont'd)

Drawing numbers assigned to Program 162 Vehicle Test Plans are as follows:

| Test Plan Drawing Number |
|--------------------------|
| 1415209 1353967 |
| 1415576 1415576 |
| 1415576 1415301 |
| 1415301 1415301 |
| |

5.3.2.2

Test Procedure Indices

Central Planning and Control Group, IMSC/VAFB, issues an index of test procedures for each vehicle. Launch Systems Engineering Department, IMSC/VAFB, issues an index of test procedures and vehicle operation instructions to cover AGE launch complex preparations to support the vehicle.

5.4 SATELLITE VEHICLE WORK SCHEDULES

Central Planning and Control, IMSC/VAFB, issues a schedule in bar chart form to cover MAB and pad checkout of the satellite vehicle. A brief summary of the work involved is included.

5.5 SATELLITE VEHICLE MAB CHECKOUT

A brief description of satellite vehicle MAB checkout tasks is set forth in the following subparagraphs.

5.5.1 Receiving Inspection


The vehicle is transferred from the transporter to a working dolly. Access plates are removed. The vehicle is inspected for damage in transit. An audit of paper and parts is made.


5.5.2 SS/B Checks

The propulsion system undergoes a general inspection shortly after arrival. The pressurization system and tank bulkhead are leak checked. A portion of the turbine starter servicing procedure is performed in the MAB.

5.5.3 88/D Checks

The guidance and flight control subsystem undergoes validation checks. The guidance computer console is checked out with the sequence timer. The pneumatic system is checked for contamination and given a pressurization decay test. The horizon sensor heads are pressure checked.





IMSC 445925-D

5.5.4

88/H Checks

The antenna system and the 8 Band beacon are checked out. Magnetometer compensation checks are performed.

5.5.5

88/C Checks

Most 88/C checks are done at the pad. The batteries are activated and tested and the destruct system is checked out and its operation demonstrated to MFSS representative in the MAB.

5.5.6

SS/A Checks

The booster adapter is fit checked to determine non-interference with vehicle parts and shimming requirements. The vehicle is weighed, if required. The alignment of prescribed parts is verified and horizon sensor and engine thrust alignments are made.

5.5.7

Final MAB Preps

At conclusion of SS/A work, the vehicle access plates are emplaced, the vehicle is loaded on a transport trailer and covered for its trip to the pad. Enroute to the pad, life boat guidance and compass rose checks are made.

5.6

SATELLITE VEHICLE PAD CHECKOUT

Upon arrival at the launch pad (VOS) the vehicle is moved from the transporter and placed on a checkout dolly. Access plates are removed and the vehicle prepared for compatibility checks.

5.6.1

All Systems Compatibility

These checks are performed to demonstrate the capability of the AGE to support the vehicle. They consist of the following:

88/C Power-on Checks

SS/B Lendline Transducer Checks

SS/D Guidance and Control Checks

88/H RF Compatibility Checks

SS/C Pyro Preparations


Lifeboat System Compatibility Checks

5.6.2

Pad Systems Test

After vehicle and launch systems compatibility has been established, preparations are made for the systems run. Test equipment is examined to assure its calibration





5.6.2

Pad Systems Test (Cont'd)

is current. Supporting facilities are made ready to participate in the test. The test consists of a simulated countdown, launch, and flight. The MAB analog station and BTL participate in the test. BTL supplies discrete commands that affect satellite vehicle operation. The psyload participates in the test. Recorded data is analyzed to determine systems performance.

5.7

BOOSTER PAD CHECKOUT

The booster is delivered to the pad from the RIM building.

It undergoes the following checks:

Solid Motor Fit Checks
Leak Checks
Electrical Checks
Rydraulic Checks
All Systems Run
Dry Countdown
Propellant Flow

5.8


AFSED EVALUATION


AFSSD will review the results of tests, particularly the pad systems test and the DAC flow to determine the readiness of the vehicle for flight and of the launch system to support the launch. Complete or partial tests may be re-run as directed by the 6595th ATW prior to entry into the R minus day pre-launch phase.

5.9 R MINUS DAYS ACTIVITY

R minus days pre-launch activity will occupy five days for SIN-2A vehicles instead of the usual four assigned to SIN-2 vehicles. The additional time is required for the booster solid motor tasks. IMSC activities are listed in the R-Day Book, IMSC 222494 (with applicable vehicle number). The test procedures applicable to the specific R-day tasks are cited in the book.

All items in the R-Day Book must be accomplished and verified or a satisfactory explanation made for those emitted. The working copies of the R-Day Book are delivered to the IMSC launch conductor prior to initiation of countdown.





SECTION VI

COUNTDOWN AND LAUNCH SEQUENCE

6.1 LAUNCH OPERATIONS CONTROL PROCEDURES

The "Program 162 Satellite Orbital Centrel Paln" TWRCT 62-22, prepared by the 6594th ATW contains a chronology of operating procedures with particular emphasis on satellite control facility functions and on interstation communication affecting the STA, LOCC, VTS and TLM ship during the period of about R-2 day through launch and beyond. The LOCC will keep the STA posted on preparation for launch and countdown progress with particular emphasis on helds and completion of countdown milestones.

6.2 CGUNTDOWN

Countdown is accomplished by using the Pregram 162 Countdown Manual, IMEC 224028, as a guide. The manual is prepared by IMEC/VAFB, under the direction of the LTMG. Figure 6-1 is a typical integrated countdown chart. Countdown will be approximately 480 minutes for SLV-2 boosters and 545 minutes for SLV-2A boosters. It will consist of 18 tasks. During countdown, booster checkout is accomplished by landline from the Control Center and by RF communication with the BEL Ground Guidance Station, MFSS and PMR. Satellite vehicle checkeut is accomplished via landline to the Control Center and by RF to the MAB and VTS. Progress of checkeut is visually displayed on consoles in the Control Center and is recorded on landine recorders. Countdown evaluations are made at about T-200 and T-60 minutes to review launch readiness. Upon completion of the T-60 evaluation, the terminal count and launch sequence period is entered into.

6.3 LAUNCH SEQUENCE

6.3.1 Sequence of Events, Ascent Phase

The satellite vehicle list of events from liftoff through injection into orbit is set forth in "Sequence of Events, Ascent Phase" under the fellowing LMSC drawing numbers:


| Vehicle | LMSC Number | Vehicle | LMSC Mumber |
|---------|-------------|---------|-------------|
| 1159 | 1350104 | 1164 | 1351789 |
| 1160 | 1350105 | 1165 | 1351790 |
| 1161 | 1353832 | 1166 | 1351791 |

A brief summary of principle ascent phase events for 1159 and 1160 are covered in the next paragraph.


6.3.2 Ascent Phase Events


A brief description of the ascent phase will be included in an early revision.





INTEGRATED MILESTONE COUNTDOWN CHART

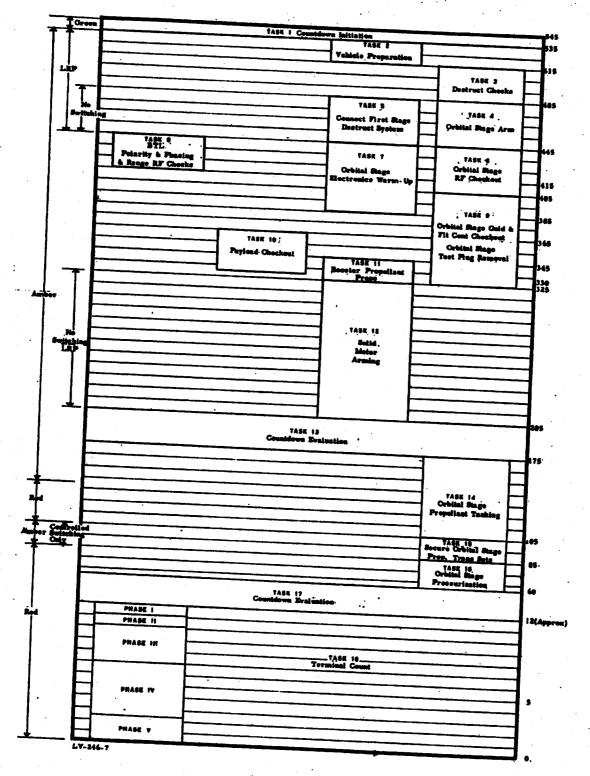





LAUNCH CRITERIA

7.1

DEFINITION

Launch criteria are requirements for execution of a launch established on the basis of their effect on the objectives. They include range safety, pad conditions, photographic coverage, weather, launch time window, RF interference, range clearance, vehicle systems and launch systems readiness.

7.2

SOURCE OF LAUNCH CRITERIA INFORMATION

This publication and the STO set forth certain launch eriteria. In addition, IMSC, Sunnyvale publishes "Launch and Hold Limitations" for S-OlA Vehicles, IMSC 1414599A which is applicable to all launches. IMSC A049590 is a comparable publication for S-Ol Vehicles. Program peculiar data implementing these publications is usually issued for each launch on R-10 day. A follow-up launch criteria TWX will be issued on R-2 day, if required. These documents include launch weather restrictions, launch time window and other launch data. Information contained in these documents take precedence over any conflicting information that may appear in this document.

7.3

LAUNCH DECISION

The final authority for execution of the launch command is vested in the Launch Controller, 6595th ATW. It is his responsibility to make all decisions where primary and secondary objectives may be affected during the launch countdown. The effect of other variants in the system will be analyzed in the STA and the LOCC will be advised if the launch must be held or aborted for other than launch base determined reasons.

7.4

VEHICLE READINESS

Launch preparations prior to countdown initiation are covered in Section 5. All booster and satellite vehicle systems shall indicate a readiness for launch compatible with flight objectives for the particular launch. Countdown evaluations and confidence checks are made as set forth in Paragraph 6.2.

7.5

PAD CONDITIONS

The DAC Launch Conductor will ascertain that all DAC pre-countdown preparations have been satisfactorily completed prior to the initiation of countdown. IMSC ACE support equipment check list for pad and LOB are contained in the R-minus day schedule prepared by the Launch Systems Engineering Department, IMSC, VAFB. Completion of all items on the list is reported to the IMSC Launch Conductor prior to start of countdown. Launch Conductors will report pad readiness condition to the 6595th Aerospace Test Wing Launch Controller prior to initiation of countdown.





IMSC 445925.D

7.6

PHOTOGRAPHIC COVERAGE

7.6.1

Normal Coverage

Photographic coverage of launch and ascent phases is required as set forth in Section 8. Sufficient comeras must be in operation to assure adequate photographic coverage of the launch. Photographic crows with portable equipment will have free access to the launch area within the confines of safety

7.6.2

Special SLV-2A Coverage

Vehicle 1159/354 and three subsequent launches using SLV-SA boosters will require special tracking film. The film will be ordered through the LTMG. Ideally, this photography will include 6 inch resolution in tracking the solid motors through their ejection and ballistic trajectory.

7.7

WEATHER FORECASTS AND REPORTS

Weather forecasts for the Launch area are prepared by Detechment 3, 3rd Weather Wing, VAFB, to determine the probable effect of weather upon Launch. These forecasts are transmitted by the Communications Center, VTS to the STA in accordance with schedule contained in Table 7-1. The TLM ship will also furnish weather forecasts to the STA as set forth in that table: Forecast data and subsequent tabular reports of weather conditions, which will be prepared and submitted as set forth in Table 8-5, will become a part of the Launch report. Winds aleft readings are taken by the Rawinsende Station, Berr Foint Arguello and transmitted to PMR Headquarters, Foint Migu, to be relayed to the STA via TWX in accordance with schedule set forth in Table 7-2. This winds aloft information is also passed to the 6595th ATW Data Evaluation Staff via Detechment 3, 3rd Weather Wing.

7.8

WEATHER COMPLITIONS

7.8,1

Visibility

For SLV-2A boosted vehicles, downrange visibility must be sufficient to permit optical tracking cameras to cover solid rocket burnout and jetison as set forth in paragraph 7.6.2. Slant range distances will be supplied by DAC. There are no visibility restrictions for SLV-2 boosters.

7.8.2


Precipitation

Precipitation will not be a factor in launch hold or about unless it affects optical coverage as set forth above.

7.8.3

Surface Wind, SLV-2A Boosters

With both stages fueled and pressurized and solid motors estached, the maximum allowable wind is 63 knots with the booster in templing condition, i.e., pins out. The limit is 64 knots if the booster in templing condition, i.e., pins



WEATHER FORECAST REQUIREMENTS

VAFB/Point Arguello Area


Weather forecasts of the VAFB/Point Arguello area will be made to the STA at the below listed times covering indicated parameters.

| FORECAST TIME | COVERACE |
|---|---|
| T - 48 hours T - 24 hours T - 12 hours T - 6 hours T - 3 hours T - 2 hours T - 1 hour | Precipitation Surface Wind Visibility Cloud Cover Relative Humidity |

TIM SHIP

| FORECAST TIMES | COVERAGE** |
|--|--|
| T - 20 hours T - 12 hours T - 6 hours T - 3 hours T - 1 hour | Precipitation Surface Wind Winds Aloft Visibility Cloud Cover Sea State |

- * In addition to these reports, the TIM ships will submit hourly forecasts to the STA from T + 1 until data pickup or return to port, whichever is the earlier.
- ** Ship position will be reported also.




WIND SHEAR ANALYSIS PROCEDURE

| Time (hrs) | Event | Action | Result |
|---------------|---|---|--|
| T-12 | Wind sounding at Arguello from 0 to 32,000 meters | Weather balloon released | Wind profile dat |
| 1 -9 | Wind sounding data trans- mitted to STA | 1. Data fed into 1604 computer (STA) | 1. Outnest and |
| т-6 | Same as T-12 | Same as T-12 | Same as T-12 |
| T-3 | Same as I-9 | Same as T-9 | Same as T-9 |
| ASAP | Review or structure recommendation based on wind shear enalysis | Decision to launch by STA | STA transmits decision to VAFB Launch Controller |

- Vehicle Structure Analysis. The IMSC Structures Organization, 53-18, will review the computer output and with reference to design analysis information, will determine if conditions are within allowable limits of structural capability and available control. The T-12 and T-6 hour programmed flights with wind aloft data inserted, will be analyzed and projected conditions at launch will be determined. If the latter conditions indicate that allowable limits are being approached or have been exceeded, the Structures Organization will so inform the STA. The STA will then request, through the LOCC, a forecast of conditions in the altitude regime of interest for the desired launch tional wind soundings will be requested and the new data will be used to update the previous launch decision.
- 2. Direction of wind given in degrees, true and velocity in meters per second for computer input.
- 3. Observations are furnished for every 300 meters up to 7000 meters altitude and for every 500 (to 600) meters beyond.





7.8.3

Surface Wind, SIN-2A Boosters (Cont'd)

Before fueling and pressurization have been completed, the following surface wind restrictions are applicable:

| Loading State | Toppling Condition | Launcher Pins In |
|------------------------------------|-----------------------|---------------------|
| Vehicle empty without solid motors | 16 | 46 |
| Vehicle empty with solid motors | 32 | 46 |
| S-OlA only loaded, solids attached | 37 | 41 |
| Vehicle loaded, solids attached | 37 | 37 |

7.8.4 Winds Aloft

Table 7-2 sets forth procedure used by the STA to determine the effects of winds aloft on the vehicle structure. Decision to launch, hold or abort is conveyed to the LOCC by the STA based on wind shear studies.

7.8.5 Wind Drift

Winds aloft readings are used by PMR to predict the probable points of impact of heavy missile parts in case of destruct. The Missile Flight Safety Officer will call a hold if it appears that populous areas may be endangered.

7-9 RADIO FREQUENCY INTERFERENCE

System radio frequencies are monitored by the Frequency Control Division, Range Operations Department, PMR in accordance with PMR Instruction 2400.2. The presence of interfering signals should be reported to the activity using the RF band in which the spurious signal is noted.

7.10 RANGE CLEARANCE

Range clearance confirmation will be issued by the PMR Missile Flight Safety Officer. This clearance will be issued to the Launch Operations Coordinator in the LOCC and will be revocable at any time for sufficient cause.


7.11 VEHICLE TELEMETRY READINESS


7.11.1 Calibration and Checkout

All satellite vehicle telemetry points will be operative for countdown and flight systems test. Booster and satellite vehicle telemetry will be checked out and calibrated prior to launch to determine its readiness. Effort will be made to have all satellite vehicle primary points operative for launch.

7.11.2 Satellite Vehicle Telemetry

The 6595th ATW Evaluation Staff prepares a guide of telemetry measurements to support the launch for use by the Launch Controller, the launch complex, the MAB ground station and the LOCC. The guide consists of three categories.





LMSC 445925-D

7.11.2

Satellite Vehicle Telemetry (Cont'd)

Category I is a listing of mandatory measurements (GO/NO-GO) as stipulated by AFSSD. Category II contains pre-launch vehicle status measurements and Category III lists operational control measurements.

7.11.2.1

Satellite Vehicle GO/NO-GO Telemetry

AFSSD, Inglewood, advises the STA of mandatory telemetry measurements during R- minus days. The STA relays this information to the 6595th ATW via TWX about under Category I.

7.11.2.2

Satellite Vehicle Category II Telemetry

The guide lists essential pre-launch vehicle status information under Category II. Level of measurements should be checked during countdown and if discrepancies are found, the Launch Controller with be notified. The Launch Controller will conduct an evaluation to determine if improper readings actually represent vehicle status. In addition, the STA will be notified through the LOCC of any discrepancies regardless of action taken.

7.11.2.3

Satellite Vehicle Category III Telemetry

Essential operational control telemetry is listed under Category III in the Guide. Authenticity of these measurements must be verified during countdown and the LOCC should be notified of any discrepancies. The LOCC in turn should notify the STA.

7.11.3

Booster GO/NO-GO Telemetry

Booster GO/BO-GO telemetry measurements are supplied by DAC.

7.12


TRACKING SYSTEMS READINESS


Prior to launch, the operability of the downrange ship will be reported to the STA. The operability of all global tracking stations will be determined by the STA. Should any inadequacy exist of sufficient magnitude to justify holding the launch, the STA will so advise the LOCC. Minimum ground complex capability required for support of ascent and orbital operations is set forth in detail in the OTD. The readiness of the PMR tracking system is determined by the Range Safety Officer.

7.13

BTL GUIDANCE READINESS

Prior to launch, the readiness of the Guidance Station shall be determined by BTL Guidance Control Officer and the LOCC notified accordingly.





7.14

HOLD TIME LIMITATIONS

The satellite vehicle and booster pre-flight preparations are subject to certain restrictions dependent upon the characteristics of the various components and the environmental conditions. Hold time limitations are a guide to be used to indicate the length of time a specified condition is valid and steps to be taken to return the vehicle to launch readiness condition in event that the limit is exceeded. Allowable time from test to test of the various vehicle systems is also specified.

7.14.1


Booster Hold Limitations

Booster hold limitations are published by DAC.

7.14.2

Satellite Vehicle Hold Time Limitations

Satellite vehicle hold limitation data is covered in paragraph 7.2.



LAUNCH INSTRUMENTATION AND LAUNCH DATA

8.1

GENERAL.

This section discusses the type of launch instrumentation, types of data furnished by the various ground stations and the distribution of data.

8.2

LAUNCH INSTRUMENTATION

8.2.1

Lendline Instrumentation

Hardwire instrumentation will be used to monitor certain subsystem operations of both the booster and the satellite. This instrumentation will provide functional information during checkout, pre-launch, and launch operations. Data obtained through the umbilicals will be both visually displayed on the Control Center consoles and graphically recorded. Additional data will be obtained from the satellite test plugs until their removal at about T-330. Booster landline instrumentation and satellite landline recorder channel assignments are set forth in the appropriate Tab.

8.2.2

Telemetry Instrumentation

The booster VHF - FM/FM telemetry link will transmit from time of launch until loss of signal to provide launch and flight information. The satellite will use PAM/FM and FM/FM during the launch phase to monitor and transmit vehicle performance telemetry data for real time and post-test evaluation. The satellite is equipped with UHF command system and Doppler tracking equipment. Telemetry calibration books for each satellite vehicle are prepared and distributed by IMSC, Sunnyvale to stations in the Satellite Control Facility approximately 7 days prior to scheduled launch.

Launch phase telemetry data recorded in the VAFB/Arguello area together with calibration and signal strength records will be distributed as set forth in the data flow chart.

8.2.2.1


Booster Telemetry Schedules

Booster telemetry instrumentation schedules are prepared and distributed by DAC. Copies of booster TLM schedules are set forth in the applicable TAB.

8.2.2.2

Satellite Vehicle Telemetry Schedules

Satellite vehicle telemetry instrumentation schedules are published under IMSC drawing numbers by IMSC, Sunnyvale and revisions are issued as necessary. IMSC, VAFB transmits TWX listings during the period of R-10 to R-0 covering any late changes that have not been formalized by engineering order revising the schedule. Instrumentation schedule numbers for the next scheduled Program 162 satellite vehicles are as follows:





8.2.2.2

Satellite Vehicle Telemetry Schedules (Cont'd)

| Satellite Vehicle | Schedule Number |
|----------------------|--|
| 1159 | TMGC 1050Ch |
| 1160 | IMSC 1353841 |
| 1161 | IMSC 1353841 IMSC 1353842 |
| 1162 | |
| 1163 | |
| 1164 | 0/30 |
| 1165 | |
| 1166 | IMSC 1350901 |
| 1163 1164 1165 | IMSC 135384 IMSC 135384 IMSC 135090 IMSC 135090 |

8.2.3 Optical Coverage

Optical coverage includes engineering sequential coverage, Table 8-1; documentary optics coverage, Table 8-2; metric optics tracking coverage, Table 8-3; and PMR photographic film coverage, Table 8-4. Most optical data will include timing correlation. Closed loop television systems provide visual launch information of booster and satellite for Control Center personnel. Vertical wire sky screens and Mark 51 gun sights are used to follow the vehicle flight from launch to limit of visibility for Range Safety observation.

8.2.4 Radar Tracking and Telemetry Tracking Instrumentation


FPN-33 and M33 radar track the vehicle from the launch pad for approximately one mile. These radars render early primary coverage during poor visibility when visual sighting is not possible. The FPS-16, MPS 19 and COTAR systems pick up the track about a mile from the pad. The FPS-16 and MPS-19 radars will provide skin tracking up to the time of satellite separation or maximum range. FPS-16 radar data will be processed for launch coverage reporting as set forth in Table 8-6. The AME COTAR system, used in conjunction with the booster TIM link will provide azimuth and elevation data during early launch period to drive plotboards for range safety requirements.


The TIM-18 antenna system will be used to provide azimuth and elevation data. It will also be used for driving an angle tracker plotboard and as a backup for slaving other antennss. The trihelix antenna system serves as a backup to the TIM-18. Doppler tracking is performed with the VERLORT system.

The Guidance Station in addition to guidance of the booster will supply space position data of the booster. This data will be presented in tabular form and plotted in real-time.

8.2.5 Electromagnetic Radiation Interference Monitoring Instrumentation

The PMR provides ground monitoring stations at Point Mugu, Point Arguello and San Nicolas Island and airborne monitoring stations in the vicinity of the launch pad and along the launch trajectory to guard against interference with the satellite or booster radar and telemetry frequencies. Monitor list for satellite vehicle is covered in the appropriate tab. The booster telemetry codes are included but not guidance and destruct codes.






| 22 22 23 | Y - | Fire | to of Y t Mage tal Mag | lefidility po | • | ENGIN (| reado esqu | ENTSAL | . Det/ | liled t | est requirements | | |
|-----------------|------------|------------|------------------------------|------------------|------------|----------------|------------------|------------|--------------|--------------|--|--------------------------------------|--|
| ITE MO. | | | AMER POSETS Pud 1 | | | FILM | EMULEION | | P IN | PP6 | PRAME RATIO | OPTIMUM EX- POSURE AREA | COVERAGE |
| 11. | 1 | | | A | A | 16mm | 200 | 15M | 5M | 24 | OS, 75 and Laurenber to fill 2/3 frame | Launcher and Voltate | Bervellinace , |
| 11. | 1 | D . | Þ | D | • | . 15mm | BCO | 1534 | 5M | 24 | Of, 75 and learnther to fill 2/3 frame | Leumber and Vokisio | Servellience |
| 12. 1 | • | 3 | 3 | | | 1600 | ECO | 15M | 5M | 24 | OS, FS and launcher to SEL 2/3 of frame | Laurcher and Volicie | Surveillance |
| 11.4 | 6 | G | 6 | G . | C | 1 General | ECO | 1534 | SM | 24 | GE, PS and launcher to fill 2/3 frame | Launcher and Vehicle | Surveillance |
| 11. 9 | | | | * | | 16 | 23, | 58 | 198 | -400 | Entire Vehicle and issueher to fill 1/2 frame | Louncher and Vehicle | High Speed Surveillance |
| 21.6 | | G . | G | C | G | 16mm | ER | 56 | 156 | 400 | Entire Vehicle and issueher to fill 1/2 frame | Louisher and Volisio | High Speed Serveillence |
| 11.1 | | M | M | × | M. | 16 | ER. | 55 | 58 . | 400 | Upper Set. Yeh. umbilicate fill frame | Upper Umbilical - Connections | Umbilical Ejection |
| 11. 0 | | N G | × | M | . | 1 desan | ER | 36 | \$4 , | 400 | Lower Sat, Veh. quibilicals fill framb | Lower Umbilical Councelions | Umbilical Ejection |
| 11.1 | | - | | · · c · | G | 16mm | XR. | 56 | 56. | 400, | All Sat. Yeb. Umbilicals fill frame | All Satellite Yek- Connections | Umbilical Rjectica |
| 11.1 | | - | • | 3 | 3 7 | : 70mm | Ansee- chrome | 38 | 56 | 20 | All Satellite Vehicle umb. | All Satellite Vehicle Connections | Umbilieni Mostica |
| 11, 1 | | - G | a . | a. | 6 | 16tam | EGO · | 50 | 156 | 206 | Main, Versier and Selid Besster Engines (11) frame | Englane - Flame | ignition - Liftoff |
| 11,.1 | | H | H | H | | 16mm | BCO | 58 58 | 158 | 200 | Main, Vernier and Salid Beester Ragines III. frame | Inglace - Flame | Ignition - Lifted |
| 11.1 | 4 | 3 | 3 . | | • | 16mm | 200. | 55 | 156 | 200 | Vernier Sugine SIL 3/4 frame | Ragine - Flame | ignitien - Liftelf |
| 11. 1 | 6 . | 1 | 1 | 1 | 1 | 16000 | EGO | 58 | 158 | . 200 200 | Base of First Sings and Launch Dock | Flight Dock Area | Ignition = Lifteff |
| 11. 10 | 6 | K | K | ĸ | K . | 1-6mm | 200 | 58 | 158 | 200 | Lewer Missile and Launcher fill frame Base of Umbiliest Mast | Lower Mostle and Laurehor | Lower Massie & Louisher - Liftell |
| 11. 17 | , | L . | L | Ļ | L | 16mm | 100 | 38 | 158 | 200 | to fill frame Paul lines at Base of | Deficator Plate | Mast Effects against Base of Mast |
| 11, 10 | | VZ6 | | | | | | | | | Launcher to fill frame | Lower left helf of Louncher | Maet Effects against Faci Line & Barco's Joints |
| 11. 19 | | VIII | ***** | YIS | ¥28 | | BLW | • | LOV | 24 | | | Tracking, Telemetry antique beredight camp to - Contractor Operated |
| 24, 27 | | | 725 | A38 | AZE | 35mm | BAY | • | FOA | 24 : | | | Tracking, radar bore- sight-namera - Contractor Operated |
| 11.20 | • : | 998A - | DTL | on all pe | do | - 16mm | BCO · | • | LOY | 24 | | | Tracking, rader bore. |
| 11, 21 | | TS-10 | LE-4 | TE-6A | 78-3 | 35mm | ECH | 208 | LOY | 40 | YS Engine Section to Sil | Engine | sight camera - Contractor Operated Tracking |
| 11, 22 | • | T\$-7 | 78-7 | TS-8 | LE-6 | 35 man | ECN, | 108 | LOY | 40 | Frame at lifted! 78 Engine Section to Sill | Sagino | Tracking |
| 11, 25 | | • | | TE-6A | • | 36 mm | BON : | los | LOY | 78 | frame at liftelf F6 fills frame at liftelf | Engine & First Sings | Tracking |
| 11, 34 LV-18 | 1-5 | TS-7 | 18 -7 | 76-9 | LE-6 | 35mm | ECH : | los | FOA | 72 | | - | Tracking |


| TOTAL | 150,00 to 100.00 |
|--------------|------------------|
| | |
| | |
| | J. |

TABLE 8-2

| | | king | F. | 3 | 2 | Pictorial Liftoff | Pictorial Lifteff | Pictorial Liftoff | Pictorial Liftoff |
|---|---|------------|---|-----------------------------------|-----------------------------------|-----------------------------------|----------------------------|----------------------------|---------------------|
| | | Tracking | Tracking | Tracking | Fracking | Actori | Actoria | ictoria | ctoria |
| rements P | IMAGE TO OPTIMUM EX- FRAME RATIO POSURE AREA | Missilo | Missile | Missile | Missile | Missile | Missile | Mestle | Missile P |
| DOCUMENTARY DETAILED TEST REQUIREMENTS COMPLEY 75.2 BAD 6 | | | Entire Vehicle Missile To Fill 4/5 Fr. | Entire Vehicle to Fill 4/5 Fr. | Entire Yehicle to Fill 4/5 Fr. | Entire Vehicle to Fill 3/4 Fr. | Vehicle Fills 2/3 Frame | Vehicle Fills 2/3 Frame | N/A Vehicle Fills N |
| ETAI | | 7 | * | 7 | 9 | 2 | N/A | N/A | N/A |
| . " ". | DURATION T- to T | 3 | LOV | 3 | Runout | Runout | *; Y) | N/A | < |
| • | | 205 | 502 | 202 | | 85. | N/A | Z | N/A |
| : - | EMULSION | ECO ECO | ECO | ECO | 70mm Anscochrome 5S | 70mm Anscochrome 5S Runout | Anscochrome | Antecehreme | BŁW |
| | SIZE | lémm | 16mm | 16mm | 'Omm' | Omm A | 4 2 4 4 | £25 As | ທ໌. |
| | POSITION | TS-2 | 1.E-6 | 1.5-8 | TS-2 | M L | M A | ₹ . | E 4x5 |
| | NO. | 12.1 | 12.2 | 12, 3 | 12.4 | 12.5 | 12.6 | 12, 7 | 12.8 |



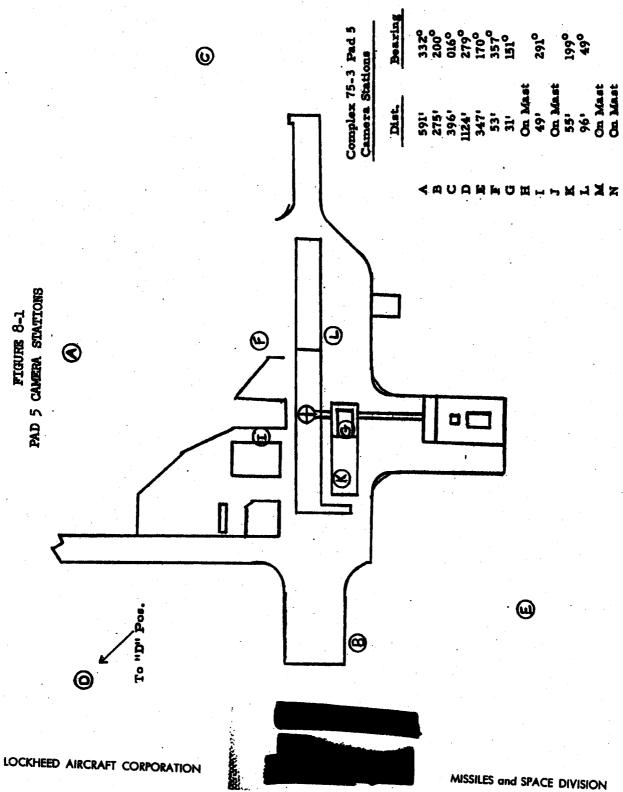




METRIC OFFIC DATA REQUIREMENTS

| DESCRIPTION OF DATA | SOURCE OF DATA | COVERAGE | ACCURACY | SAMPLE RATE | PRESENTATION | TIME REQUIRE |
|-----------------------|---|---|----------------------|----------------|---|-----------------|
| Space position data+ | Best combination of Mitchell, Askania cameras located at PMR phototheodolite | liftoff to limit of | <u>√</u> 1.0 mil | l pt/2 sec | Tabelation of X, Y, Z (ft) vs. time (sec) | 7/24- |
| Valority data+ | sites: YAPB NMPPA Pt. Megu SNI | | 1 1/0 | | Ym, Vy, Vm, Vt in M/sec | |
| Space position data / | | Lifteff to limit of tracking ability | £1.0 mti | 4 pts/ sec | Smoothed data tabulation of X, Y, Z (tangent plane coord) (g vs time (see); system time in even quarter sees. Plots of X vs Z, X vs Y, X vs T, Z vs T | T / 72 hrs. |
| folosity data / | | | 1 1/a | | Smooth data tabu- lation of Vz, Vy, Vn, Vt (A/sec) (Tangest plane coord) vs time (sec) sven quar- ter secs. Flet of Vr vs T | |
| | PMR, MOTU ameras | | /2 day, or better | ia la | Tabulation of \$6,00, and \$6 (dog) we time from liftedf (sec) | |

If orbital status is not verified after Pass 2, these data are required in T / 24 hours. If orbital status is verified after Pass 2, the time required may be increased to T / 32 hours. TWRGA-3 notifies the 6595th Aerospece Test Wing/VAFB within 8 hours after launch.

A cleanup data package will be issued if corrections are necessary after delivery. Distribution of cleanup package will be the same as 72-hour issue. TWRGA-3 will be notified immediately when cleanup package is issued.

LY-174-5






TABLE 8-4
PMR PEOTOGRAPHIC FILM REQUIREMENTS


| Camera. | A-24 70 mm Ans | Film | Focal Length | Frames P/S | Coverage |
|------------------------------|----------------|----------------|------------------|---------------|--------------------|
| IA-24 Tranquillon Peak | | 70 mm Ansco | 480 in | 60 | Solid Rockets |
| MOTU | 1 (1) | | 300 cm 200 in | 64 48 | Vehicle Vehicle |
| MOTU | 2 (1) | 35 mm 70 mm | 120 cm 300 cm | 64 48 | Vehicle Vehicle |


(1) Two MOTU's required.

Each has two cameras.

Mount 1 located Site 5.

Mount 2 located Site 6 or 7.





8.2.6

Weather Instrumentation

Weather data is obtained using Rawinsonde equipment and other standard weather determining equipment.

8.2.7

Miscellaneous Instrumentation

Miscellaneous instrumentation includes equipment for determining weights, center of gravity, separation force, densities, temperatures, voice recording equipment, etc.

8.3

LAUNCH DATA ACQUISITION

8.3.1

Background

The data requirements requested of the Pacific Missile Range and VAFB were established in Program Requirements Document, IMSC BOOLO79. Data requirements of all activities supporting the launch effort and ascent phase of flight are summarized in this section.

8.3.2

Launch Data Sources

Launch data is provided by the following sources:


Vandenberg Tracking Station
Control Center and Missile Assembly Building
BTL Guidance System
IMSC, Sunnyvale
IMSC, Sunnyvale
IMSC, Santa Monica
Missile Flight Safety System PMR
Detachment 3, 3rd Weather Wing, MATS, USAF, VAFB
Range Support, PMR
1369th Photographic Squadron, USAF, VAFB
Frequency Control Division, PMR
Telemetry Ship


8.3.3

Vandenberg Tracking Station

This station provides telemetry and tracking data reception for launch phase through VERLORT, TIM-18 systems. The following telemetered functions occurring within the range of VTS are TWXed to the STA for computer operation:

MECO VECO BTL D-1 on/off command BTL D-2 on/off command Separation Satellite Vehicle Ignition Satellite Vehicle Burnout





8.3.4

Control Center and MAB

The Control Center and MAB acquire launch data as set forth below:

- a. Booster and satellite launch control data is monitored and recorded in the Control Center. Tape recordings are made of selected loops of conversation by DAC and LMSC during countdown in the Control Center.
- b. The MAB is equipped with a playback station which is used to produce LTWG analog playbacks following each launch.

Required number of reproducible landline records will be prepared and distributed as set forth in the data flow chart.

8.3.5

BIL Vandenberg

BIL/VAFB supplies plotting board charts, event recorder tabular data, and online printout data. Boresight film is available for loan.

8.3.6

BIL, Whippany

BFL Whippany supplies copies of Plaza tracking data and Jefferson data.

8.3.7

LMSC, Sunnyvale

LMSC, Sunnyvale furnishes the following processed launch data to the LTWG: satellite T/M analog and digital quick look kit, smooth radar plots, radar and Doppler tabulations, and dub magnetic tape of TLM ship telemetry.

8.3.8

DAC Santa Monica

DAC, Santa Monica furnishes the specified number of booster telemetry analog kits and one copy of microfilm of the kit.

8.3.9


Missile Flight Safety System, PMR

Launch data furnished by Missile Flight Safety System PMR, includes the following: flight safety radar plots; FRW-2 UHF commands; COTAR-Plots; COTAR strip charts; COTAR system direction cosine and present position typeouts; MK-51 sky screen strip charts; and, on request of the LTWG, Radsky #1 and #2 photo plots and/or flight safety voice tapes. Table 8-7 sets forth PMR Range Safety data requirements.

8.3.10

Detachment 3, 3rd Weather Wing, USAF, VAFB

Upper air and surface tabular weather data are supplied by Detachment 3, 3rd Weather Wing in accordance with Table 8-5.



IMBC 445925-D


TABLE 8-5


LAURCH WEATHER DATA REQUIREMENTS

| Time Required | T + 10 hours | T + 10 hours T + 72 hours |
|---------------------|---|---|
| Presentation | Tabular | Tabular |
| Observation | T - 12 brs. Leunch Time | T - 12 T - 6 Leunch Time |
| cy. | +.05 in +.001" Hg +1 deg F +10% +3.6 knots +10 deg +1000 ft | +1.5 mb above 50,000 ft +1 deg C Best Obtain- able +3.6 knots +10 deg +10% |
| Accuracy | Precipitation Pressure Temperature Humidity Wind Speed Direction Visibility | +1.5 mb above T - 12 Tabular T + 10 hours 50,000 ft T - 6 +1 deg C Best Obtain- Leunch Time able +3.6 knots +1.0 deg +0.6% +10% T + 72 hours |
| Description of Data | Surface conditions at the launch pad | |

Required every 1000 ft.

All parameters correlated with tape-line altitude above mean sea level. Cloud cover noted. Required every 1000 ft to 10,000 ft, every 2000 ft, and every 5000 ft above 20,000 ft. **700**





8.3.11

PMR Range

- a. PMR furnishes metric optic data and films in accordance with Tables 8-3 and 8-4.
- b. PMR furnishes FPN-33 and M33 short range radar coverage. FPS-16 and MPS-19 radars provide skin tracking coverage from launch to limit of tracking capability. FPS-16 data requirements are summarized in Table 8.6
- c. Booster telemetry coverage as set forth in Section 4 of the data flow chart.

8.3.12 1369th Photographic Squadron, USAF, VAFB

Documentary and engineering sequential photographic coverage of launch is provided by Detachment 1, 1369th Photographic Squadron as set forth in Tables 8-1 and 8-2. Requirements are coordinated through the Technical Support Office, 6595th Aerospace Test Wing. Photographic coverage includes the following:

a. Engineering photography


- (1) Instrumentation photography consisting of high and normal speed motion pictures and rapid sequence still photography for gross data analysis purposes with known time reference record exposed on the film.
- (2) Engineering surveillance photography consisting of high and normal speed motion pictures and rapid sequence still photography which does not require time reference.
- (3) Engineering still photography consisting of standard 4 X 5, $2\frac{1}{4}$ X $2\frac{1}{4}$, and 35mm photography for engineering purposes.
- b. Documentary photography consists of still and motion picture photography utilized for historical purposes, briefing presentations, and progress reports.

8.3.13 RF Frequency Control, PMR

PMR frequency interference control provides a report by TWX to the 6595th ATW summarizing the frequency monitoring results at the time of launch. DAC also receives a written report on RF monitoring results. A transcript of the report is included in the final launch report.

8.3.14 Telemetry Ship

The downrange telemetry ship will receive and record telemetry, radar and Doppler data. The ship will transmit data to the STA in near real time. Telemetry data specified by the STA will be read from telemetry recordings and transmitted to the STA with systems time indicated.








· 1460 445925-D

TABLE 8-6

PPS-16 HADAR LAUNCH DATA COVERAGE

| of Date | Source of Data | Coverage | Acouracy | Sample Rate | Prosentation |
|---|--|--|---|----------------|--|
| Space, position and velocity data tabulations | Best combination of DMR FPS-16 radar sites; preferably in- cluding Tran- quillon Peak site | From list- off to limit of tracking ability | 1/2 mil Position data to nearest foot | 1 pts/sec | X, Y, Z, (ft) versus time (sec) Yx, Yy, Yy, Yt, (ft/sec) versus time (sec) |
| Space, position and valcoity data tabulations## | | | Valority data to nearest ft/sec | | (a) Smoothed Cartesian coordinate position and valuatity data in even quarter-second increments of system time. |
| | | | | | (b) Smoothed polar coordinate position data referenced to primary FFS-16 radar site and VFS VERLORY site. Time interpolated to even quarter-second increments of system time. (c) Smoothed curvilinear position and velocity ecoponents in even quarter-second increments of system time. |
| Space Position data, punched cards | | | | ł | IBM cards containing new reder data giving alant range, animath, and elevation uncorrected for refraction effects, unsmoothed, and referenced to the tracker site. Such card will describe one time-space coordinate. Cover sheet and header card will include identification of each stack of cards, duration of coverage, and timing correlation |
| dar plotboard harts and plots r radar tabula- ions | | | | | Annotated plots. |

- If orbital status is not verified after Pass 2, these data are required at T + 24 hours. If orbital status is verified after Pass 2, the time required may be increased to T + 32 hours if IMEC/BV notifies the 6595th Aerospace Test Wing, VAFB, within 8 hours after launch.
- A cleamy data puckage will be issued if corrections are necessary after delivery. Distribution of cleamy package will be the same as 72-hour issue. LMSC (61-b4) will be notified immediately when cleamy package is issued.






TABLE 8-7 RANGE SAFETY DATA COVERAGE

| Description | Copies Required |
|--|-----------------|
| Destruct Command Data | 2 sets |
| Transcript of Voice Tapes (on request) | l set |
| Flight Safety Plotboards and COTAR Radar & COTAR, Nos. 1, 2, 3, 4, 5, 6 (DTO 1, 2 & 5) | 3 sets |
| COTAR Strip Charts | 1 set |
| MK 51 Sky Screen Strip Charts | l set |
| RADSKY 1 and 2 (on request) | l set |



8.3.15

Servicing Notes

Servicing notes are compiled by DAC, VAFB and IMSC, VAFB following each launch.

Information included in these reports is as follows:

- a. IMSC Servicing Notes contain a brief satellite vehicle chronology, launch weather information, propellant loading and analysis data, pressurization data, air conditioning data, countdown report, and other information as directed by the STA.
- b. DAC Servicing Notes contain final booster data including instrumentation data, alignment data and liftoff weight, balance data and other information.

8.4 LAUNCH DATA PROCESSING

This paragraph contains information regarding the processing of launch data prior to distribution. Where applicable, test data will be correlated with systems time and will be annotated for identification, calibration, and interpretation. The processing of booster data will be accomplished by DAC, VAFB and Santa Monica, and copies of data designated in the data flow chart will be furnished to IMSC and other authorized agencies. Certain metric optic and radar data will be processed by PMR. Engineering sequential and documentary launch films will be processed by USAF at VAFB. Satellite and raw payload data will be processed by IMSC data services.

8.5

LAUNCH DATA DISTRIBUTION

8.5.1

Landline Data

Landline records will be distributed in accordance with the data flow chart. Copies will be made of reproducible satellite vehicle records as required.


8.5.2 Telemetered Data

Specified telemetry data will be transmitted via the microwave link between the Vandenberg Tracking Station and the STA. The data will be also recorded for delivery to IMSC, Sunnyvale as set forth in the data flow chart.

8.5.3 Data Flow Chart

The data flow chart consists of a tabular presentation of launch data distribution. A data log sheet is prepared for each launch by the 6595th Aerospace Test Wing, VAFB. It is used to record receipt and delivery of launch data by that activity. Item numbers and nomenclature on the data log sheet agree with those appearing in the data flow chart. Data identification information is usually printed on labels which are pasted to the launch data documents. Data flow chart is included at the end of this section as Table 8-8.








8.5.4

Data Handling

Every effort will be made to deliver test data within the allowed time limit. Unavoidable deviations will be coordinated with 6594th Aerospace Test Wing, Code TWRCA-3 and reported to the 6595th Aerospace Test Wing and to IMSC, Sunnyvale, Department 61-44. An inventory will accompany each shipment. Couriers will be designated as necessary to deliver flight test data in accordance with data flow schedule. Normal courier service from VAFB to Sunnyvale will be utilized where practicable, when special couriers are not assigned. Data that is not available for courier delivery will be transmitted by certified mail.





24 3 1 3 3 FLIGHT TEST LAUNCH DATA FLOW 3 3 L'IVE LX 1 (N) 10 I Corr l. 19 Rively Roserting, VAPB Verlars Reday, 100 Chancel L. Fruch Receiving, VATS Vertori Badar, 6 Co. sthed Paper Tape of VAPA Verlore Bade Deb Mag Tape B (10, 5" Red Reposted) Reid Tlans Amilogs of Griddel Sings T/M Original May The A of Ages, T/M Original Mag Tape 'B of Agen, T/M Burd Carr: VATS Bate: LO VANDEMBERG TRACKING STATION that Paper Tape of Tild. 18 TLM-I'B (B. 1162) ante-De Minn A. T/S Veice Tape 1.16.1 Copy of 1.16 1.14.1 T/8 Opes T/8 Ope


LOCKHEED AIRCRAFT CORPORATIO

TABLE 8-8


MISSILES and SPACE DIVISION

| 11 Enchanges Total Law 1989 | | | | | | | | 1 | | | | | | | | | | IJ | 4 SC | : 4 | 459 | 925. | -D | | |
|--|----------------|-------------------|------------------|------------------|--------------------------|-----------------|---|-----|----------|------------------|----------------------|---|-------------------|----------------------|--------------------|--------------------|-------------------|------------------|--------------------|--------------------|-------------------|------------------|-------------|------------|---|
| 1 | \$ 2 | | | · | | | • | | | WHEPPANY | | | • | WHEPPAIR | | | • | 4 | | • | | THE A | . 1 | LIFTE CHA: | |
| | 3 5 | · · | | • | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | - | | | | | | | • | | | | | | | | | | | | |
| 1. Residence Varies had Day (Crepani) 1. Li. Day had varies had been been been been been been been bee | | 1 | | • | . | A 52 G | _ | | • | *** | | | | | 1 | | | | 4 | | | - | 1 | - | |
| 1.1 Breakbare visca Ma Tapa (Original) 2.2 Receives Vision Ma Tapa (Original) 2.3 Receives Vision Ma Tapa (Original) 2.4 LANC Servicing Vision Ma Tapa (Original) 2.5 Receives Vision Ma Tapa Tapa Received Vision Ma Tapa Land Tapa Lan | | | • . | | | | | | | | • | | | | | | • | + | | | | | 1 | | |
| 2.1 Beckbones Votes Mar The Boonday) 2.2 Beckbones Votes Mar The Boonday) 2.3 Beckbones Votes Mar The Boonday 2.4 Lind Debry of Labor Berrials Bees 1.1.1.1 Deb Mar The Boonday as Beckeed by Law 1.1.1.1 Deb Mar The Boonday as Beckeed by Law 1.1.1.1 Deb Mar The Boonday as Beckeed by Law 1.1.1.2 Foreign of Votes and Mar Deb Boonday 1.1.1.3 Long of Labor Bees Boonday 2.4.1 Copies of 3.1.2 2.4.1 Copy of 3.2.2 2.4.1 Debry of 3.1.2 2.5.1.2 Debry of 3.1.2 2.5.1.3 Debry of 3.1.2 2.6.1 Debry of 3.1.2 2.7.1.3 Debry of 3.1.2 2.8.1.3 Debry of 3.1.2 2.8.1.4 Debry of 3.1.2 2.8.1.4 Debry of 3.1.2 2.8.1.5 Debry of 3.1.2 2.9.1.5 Debry of 3.1.2 2 | | 101 | 91 | | | 1 | | | | | | 1 | | | | 91 | | | | 6 10 | | | | | |
| 1.1. Monthly Device Mag The (Original); 2.2. Monthly of Index Mag The (Original); 2.3. Monthly of Index Bearing None 2.4.1 One Copy of Lidge Savining Original 3.1.1.2 Z Copies of Savining 3.2.1.3 Monthly Original 3.2.1.3 Monthly None None Savining None 3.2.1.3 Monthly None Savining Original 3.2.1.3 Monthly Printed Themister, 1 Copy of 2, 2, 1, 2 Nature Original Themister, 1 Copy of 2, 2, 1, 3 Nature Device Printed Themister, 2 Copies of 2, 1, 1 No Admin Online Printed Themister, 2 Copies 3.2.1.3 Monthly Printed Themister, 1 Copy of 2, 2, 1, 2 Nature Device Savining Original 3.2.1.3 Monthly Device Themister, 1 Copy of 2, 2, 1, 3 Nature Device Savining Themister, 1 Copy of 2, 2, 1, 3 Nature Device Savining Themister, 2 Copies of 2, 1, 1 Nature Device Savining Themister, 2 Copies 3.2.1.3 Monthly Device Themister, 2 Copies 3.2.1.4 Monthly Device Themister, 2 Copies 3.2.1.5 Monthly Device Themister, 2 Copies 3.2.1.5 Monthly Device Savining Themister, 2 Copies 3.2.1.5 Monthly Device Savining Themister, 3 Copies of 2, 1, 2 Nature Device Savining Themister, 3 Copies of 2, 1, 2 Nature Device Savining Themister, 3 Copies of 2, 1, 2 Nature Device Savining Themister, 3 Copies of 2, 2, 2 Nature Device Savining Themister, 3 Copies of 2, 2, 2 Nature Device Savining Themister, 3 Copies of 2, 2, 2 Nature Device Savining Themister, 3 Copies of 2, 2, 2 Nature Device Savining Themister, 3 Copies of 2, 2, 2 Nature Device Savining Themister, 3 Copies of 2, 2 Nature Device Savining Themister, 3 Copies of 2, 2 Nature Device Savining Themister, 3 Copies of 2, 2 Nature Device Savining Themister, 3 Copies of 2, 2 Nature Device Savining Themist | | ~ * | | 1 | | | • | | · | | 1 | | | | | | | | 4 | | | | | | |
| 의 과장의 <u>최진 ' ''합</u> 나 라마켓크리 '네 <u>리 라리</u> 나가까지 나라 다 | • | | a | 1/2 Prom V | 7 | 1 | | | | | Q | | | | - | 2 | • | | 5.G | | | | 1 | | |
| 의 과장의 <u>최진 ' ''합</u> 나 라마켓크리 '네 <u>리 라리</u> 나가까지 나라' | 10 | and and | | ä | ed by LTWG. | 6-0/A TR | | | | | | | 7 | Petaline 4 Copies | | | - | Copies | | Copy at 3, 3, 2 | | T) 10 days | | | |
| 의 과장의 <u>최진 ' ''합</u> 나 라마켓크리 '네 <u>리 라리</u> 나가까지 나라' | OCC. MAR. | blag Real Ruse Re | iseogi | OC Servicing Mea | talogs as Requests to Di | - 1500 - E | | | Original | | - | | selllogram, Origi | der Ributated Dan | fer Tabulated Date | ler Tabulated Date | out, Original | ten Tabillation, | fort Tabulation, 2 | fort Tabulation, 1 | n, Original | La. 1 Copt | | | • |
| 의 과장의 <u>최신 ' '합</u> 나 라니티워워워 '네 <u>리 아리</u> 나가장의 [하다 | BLOCKHOUSE, LA | Rockbones Lan | Liddic Servicing | 1.1 Dab Mag Ten | 1.1.1 Rayback / | soft Titles and | | | | 4 Copies of 3. 1 | 2 Copies of 3, 1, 2, | | Ponts Recorder O | 1. 1 Dronts Recor | 1. 2 Breats Recor | 1.3 Dreats Recur | heer Oaline Princ | Mises Calies Pri | Athers Online Prin | Mess Orles Pri | der Bereeighe Fil | adar Boresight R | The same of | | |
| EV-148-17 | 2 | 2 2 | 7, | | | | | 7 H | - | 11.1 | 3, 1.3 | | 1: | | 3.2. | 13.2 | 3.3 A | 3, 3, 1 | 3.3.2 | 1.3.3 | 4 | 3.4.1 2. | 1 | | |

MISSILES and SPACE DIVISION

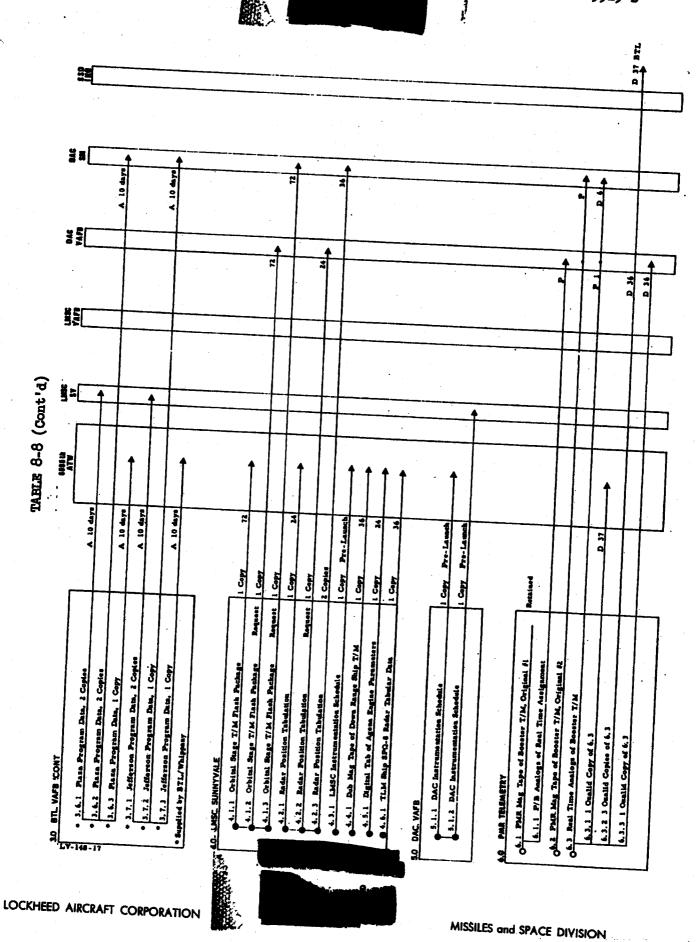

IMSC 445925-D

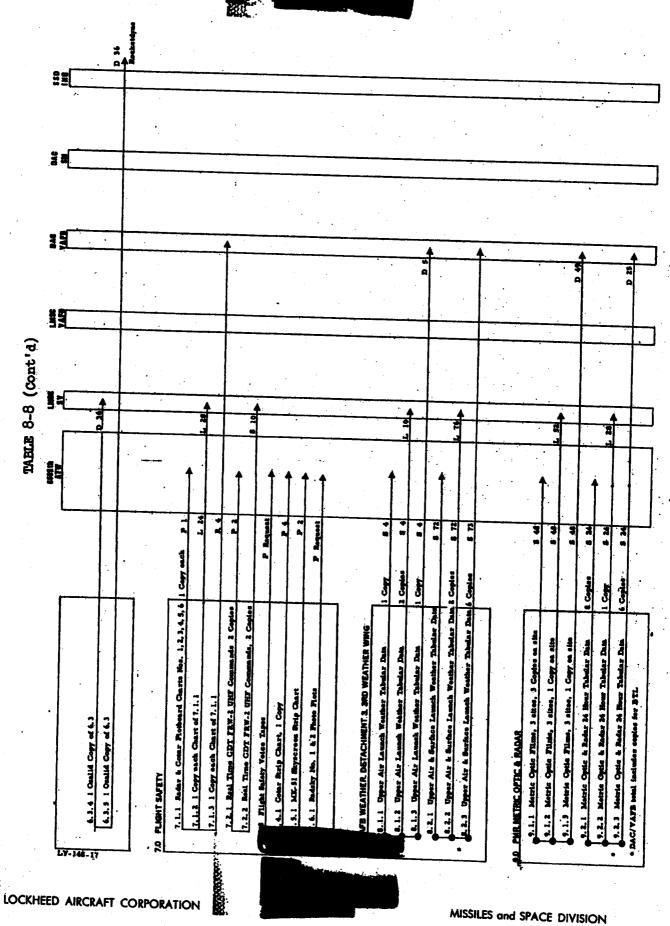

LMSC 445925-D 35 22 2 3 4 35 ACTUREDATE DESCRIPTION REFER TO THE ITEM WIMEER stadol, bedelates start of data flow. Di some carre the data flow is shown starting With copies rather than from the Oregial data source, erciums I termoger in - recourrants for any special data or extra cores etems well be accreded as derected by the craiman of the ling. the that enow hear a colube represents the that but at that location wider hormal conditions, ERD: 5 - STRATEGIC ARROPACE DIVISION: PORTBELLT, TABLE 8-8 (Cont'd) DOT STAROL BUNCATHS SOURCE OF COPIES OR DATA FLOW CONTROL PORT. A-FIL D. BOUGLAS: L. LOCIDER STRECK DESCRIATE COURSES REPT The hydrens abovy preceding of the Data details 3 Contact O Contract 8 Ma. 1. 17 hr detrie Optio, Comes, Indae dam- Dab. & Co. 9.3.3 72 ke Mourie Optie, Come, Bader dame Bab. Metrie Opte & Later Gone Dy Beinge 9.4.2 Motrie Optie & Badar Gone Up Rechase 9, 4, 3 Metrie Optic & Bader Geen Up Beinge POTE 2: HOTES 3. 2 73 hr Metrie Orde, Come, Raday da JOD PHR RADIATION MONITOR: 10. 1. 2 R. Redistina Mattering TWX SO PHR METRIC OPTIC OFFICE RADAR 1.5.1 BM Reder - Den Carte 10. 1. 3 R. Radiation Me · DAC/VATE total incl 8-2 LOCKHEED AIRCRAFT CORPORATION MISSILES and SPACE DIVISION



IMBC 445925-D

SECTION IX

LAUNCH REPORTS

9.1

GENERAL INFORMATION

Reports are rendered by VAFB activities to cover launch phase of each flight. These reports vary from commentary passed by hot line and TWX to a formal publication prepared after extensive analysis.

9.2

LAUNCH PROGRESS INFORMATION

Hot line is used to convey launch progress information from the LOCC to the STA. The LOCC furnishes early launch information to AFSSD, Inglewood by TWX.

9.3 FLASH LAUNCH REPORT

A TWX report is prepared by the 6595th ATW covering preliminary evaluation of launch data. It includes a brief description of launch operations, a preliminary operational evaluation of each vehicle subsystem and launch facility system, and a report of significant ascent events through injection into orbit. It is

9.4 FINAL LAUNCH REPORT

The Final Launch Report is prepared by the Evaluation Staff for the 6595th ATW. It provides a formal documentation and evaluation of launch operations and results. It contains pertinent launch data, vehicle history, and other details. Evaluation is made by correlating actual launch results with predicted nominal performance. Inputs are contributed by the I/WG, PMR, DAC, IMSC, and other contractors. The report is due 14 days after launch. IMSC/ VAFB distributes the report to IMSC activities, and the 6595th ATW is responsible for delivery of remainder.

9.5 DAC/VAFB LAUNCH REPORTS


DAC/VAFB submits the following reports to distribution determined by DAC.


9.5.1 DAC Flash Report

The DAC Flash Report is the first formal evaluation report of the booster countdown and flight will include data and evaluation developed at the first DAC post Launch critique. It is due at T + 8 working hours.

9.5.2 DAC Engineering Test Summery

The Data Engineering Test Summary contains data analysis, upper air weather tabulations, oscillograph records of in-flight telemetry and critique of photographic data. It is issued two working days after launch.






IMBC 445925-D

9.5.3

DAC Preliminary Flight Report

This report is issued seven working days after launch. The report will include summaries of booster flight data, a description of the countdown and contractors' preliminary evaluations and recommendations. Extracts from it are used in preparing the Final Launch Report covered in paragraph 9.4.






TAB 45

CONTENTS

| • | | PAC |
|---|---|------|
| 1 | Introduction | 45-1 |
| 2 | , Flight Test Information | - |
| 3 | Booster 354 Flight Plan | 45-2 |
| 4 | RF Monitor List | 45-3 |
| 5 | | 45-4 |
| | Satellite Vehicle Landline Instrumentation Schedule | 45-5 |
| 6 | Booster Landline Instrumentation Schedule | he 6 |
| 7 | | 45-6 |
| | Booster Telemetry Instrumentation Schedule | 45-8 |



IMSC 445925 D TAB 45 1159/354


INTRODUCTION


This tab covers the launch of SLV-2A booster 354, mated to S-OlA satellite vehicle 1159. Tab number assigned (number 45) is the next number in the sequence carried forward from IMSC 445925-C. The vehicle is scheduled to launch from Complex 75-3, Pad 5, which has been configured accordingly. It will be the first IMSC satellite vehicle launch utilizing the SLV-2A booster. The usual pad R-minus day period of four days has been extended to five days for booster solid rocket attachment.

Tracking camera and visibility requirements for launch are changed to enable observation of solid rocket performance as set forth in section 8. Photographic requirements and camera location data have been changed recently and are reflected in optical data charts.

Recovery of one of these solid booster motors is desired, if it is floating.

Distribution of this tab was made with the basic document.






LMSC 445925 D TAB 45 1159/354


FLIGHT TEST INFORMATION

Booster SLV-2A serial 354 Satellite vehicle 8-01A serial 1159 Launch pad 75-3 Pad 5 Pad azimuth 218.4 DEG. Launch azimuth Perigee 175 DEG. Orbit inclination angle 90 N. N. DEG. 75 Period Scheduled launch date 90.7 MIN. 23 February 1963 Launch window Gross lift-off weight 1300 to 1400 PST 152,847 LBS. *

* Weight is based on information released on 11 January 1963, may vary slightly from final weighing.

Reference: Above information with exception of launch date and window were obtained from LMSC, Sunnyvale TWX P 181803Z of January 1963 as ammended by LMSC, Sunnyvale letter A 317020 of 24 January 1963.





IMSC 445925 D TAB 45 1159/354

BOOSTER 354


FLIGHT PLAN


The flight controller program for the primary trajectory is:

| Time (sec) | Programmer Roll | Rates (deg/sec) | |
|---|---|--|--|
| 0 to 2 2 to 6 6 to 10 10 to 55 55 to 80 80 to 89.85 89.85 to 92 91 to 91.78 91.78 to 130 130 to burnout | 0 +5.387 +5.387 0 0 0 0 +5.387 | Pitch 0 0 -4.056 -0.669 -0.493 -0.264 -0.264 -0.264 | Yaw 0 0 -0.799 0 0 -0.799 0 |
| | | | • |

The flight control system will be arranged for the following plan of events:

| Time | Timed Event |
|-------------|--|
| T + 55 sec | Enable separation circuitry (solid motors) |
| T + 70 sec | Solid motor separation; Roll gain change |
| T + 80 sec | Solid motor separation backup signal; Guidance enabled |
| T + 102 sec | Enable vernier engine yaw movement; Main engine gain change |
| T + 138 sec | MECO enable |
| | |





R. F. MONITOR LIST


IMSC 445925-D Tab 45 1159/354

SATELLITE VEHICLE

| EQUIPMENT | CODE |
|--------------------------------|--------------|
| Vehicle Link I | <u>.</u> |
| Vehicle Link II | T-6 0 |
| Vehicle Link IV | T- 59 |
| Acquisition Beacon | T-2 8 |
| Capsule TIM | T-2 5 |
| Capsule Beacon and Drop Marker | T- 59 |
| VERLORT Receiver | T-6 5 |
| VERLORT Transmitter | S-30 D |
| Arrel 1 farms. Common 2 m | S-68 P |
| Auxiliary Command System | V-89 |
| Special Projects Command | V-95 |


BOOSTER


| TLM Kit 1 | |
|-----------|------|
| TLM Kit 2 | T-10 |
| | Т-61 |



BOOSTER 354 LANDLINE INSTRUMENTATION SCHEDULE GROUND MONITOR SYSTEM

| Function | Rai | nge | Nom: Valu | nal les |
|---|---------|-------|--------------|------------|
| Main liquid oxygen tank pressure | 0-50 | psig | 33 | psig |
| Main fuel tank pressure | 0-50 | psig | . 28 | psig |
| Nitrogen storage tank bottle pressure | 0-8,000 | psig | 6,000 | psig |
| High-pressure missile bottle pressure | 0-5,000 | psig | 3,000 | psig |
| Vernier fuel start tank pressure | 0-1,000 | psig | 646 | psig |
| Vernier liquid oxygen start tank pressure | 0-1,000 | psig | 646 | psig |
| Engine regulator discharge pressure | 0-800 | psig | 646 | psig |
| Liquid oxygen storage tank pressure | 0-150 | psig | 71 | psig |
| Fuel storage tank pressure | 0-150 | psig | 53 | psig |
| Control manifold pressure | 0-200 | psig | 135 | psig |
| Transducer 5-volt supply | 0-10 | volts | 5 | volts |
| Hydraulic return pressure | 0-200 | psig | 80 | psig |






BOOSTER 354 LANDLINE INSTRUMENTATION SCHEDULE EVENTS RECORDER, CHANNEL ASSIGNMENTS

| Channel | Event |
|----------|--|
| 1 | Base timing |
| 2 | Power on (sequence initiation) |
| | Phase completion (master out motters) |
| 3 4 | Phase completion (resets automatically) Flight controller on |
| 5 | Fuel storage tank vent valve closed |
| 5 6 | Control manifold management at a control |
| 7 | Control manifold pressurizing valve open |
| 7 8 | Missile bottles pressurizing valve open Lox storage tank vent valve closed |
| 9 | Lox storage tank pressurizing valve open |
| ío | Hydraulics normal |
| 11 | Engine centered |
| 12 | Engine off center |
| 13 | Engine recentered |
| 14 | Launcher hydraulics normal |
| 15 | Missile bottles pressurized |
| 16 | Engine purge on |
| 17 | Main fuel tank vent valve open |
| 18 | Fire 1 store on tenk measured of a service of |
| 19 | Fuel storage tank pressurizing valve open / Fuel fine load valve open |
| 20 | Lox fine load valve open |
| 21 | Lox rapid load valve open |
| 22 | Fuel rapid load valve open |
| | Main lox tank vent valve open |
| 23 24 | 97% fuel |
| | 100% fuel |
| 25 26 | |
| 27 | Main fuel tank pre-pressurizing valve open BTL guidance on internal power |
| 28 | 95% lox |
| 29 | Inverter on |
| 30 | Inverter on internal |
| 31 | |
| 32 | Flight controller on internal |
| 33 | Booster on internal power |
| 35 34 | launcher clear to fire |
| 35 | Lox transfer resume |
| | Main lox tank vent valve boost close |
| 36 27 | Main lox tank pre-pressurizing valve open |
| 37 38 | 99% lox |
| | 100% lox |
| 39 40 | Main propellant tanks pressurized |
| 41 | Propellant transfer complete |
| | Engine start |
| 42 | Liftoff |
| 43 | Technical hold imposed |
| 44 | Malfunction |
| 45 | Propellant hold over-ride |
| 46 | Flight controller and hydraulics over-ride |
| 47 | Phase V holes |
| 48 | "Proceeding |
| 49 | Liftoff signature Agena |
| 50 | Internal tip |

LOCKHEED




BOOSTER 354 TELEMETRY INSTRUMENTATION SCHEDULE CHANNEL ASSIGNMENTS, IN-FLIGHT TELEMETRY

FM/FM Channels, Kit No. 1

| PM/PM Channel | Center Frequency | Function | Range |
|------------------|---------------------|---|----------------|
| | | | |
| | 2.7 | Solid motor chamber pressure, low | Not assigned |
| ا | • | range, motor for 3 | 0 to 100 pein- |
| 8. | 3.0 | Vernier engine No. 2 chamber pressure | O to Soo pezie |
| 9 | 3.9 | Combined BTL commands | 0 to 500 psia |
| 10 | 3.9 5.4 | Main engine charters | 0 to 5 volts |
| ii l | 7.35 | Main engine chamber pressure | 0 to 800 paia |
| | 1.32 | Sequence No. 1: fuel & lox float | · - |
| ٠,, | | switches, MECO, VECO | 0 to 5 volts |
| 12 | 10.5 | Magnetron current (BTL) | 0 to 100% |
| .13 | 14.5 | Vibration, pitch axis, low level, forward thrust structure, solid motor | |
| A | 22.0 | Solid motor chamber pressure, high | <u>+</u> 3 g |
| C | 40.0 | range, motor No. 3 Vibration, longitudinal axis, high | 0 to 800 psia |
| E | 70.0 | level, gimbal block area Subcommutated to 45 FDM channels | 0 to 1,200 cps |

Table 6.1.2 FM/FM Channels, Kit No. 2


| FM/FM Channel | Center Frequency | Function | Range |
|------------------|---------------------|--|-----------------------------|
| 7 | 2.3 | Sequence 3: solid motor removals: | 1 |
| 8 | 3:0 | No. 1, No. 2, & No. 3 Sequence 2: ignition switches 1 & 2 pickup; separation signals | 0 to 5 volts |
| 9 | 3.9 | (primary & backup) Vehicle axial acceleration | 0 to 5 volts 0 to 8 g |
| | 714 | Golid motor chamber pressure, low | Not assigned |
| 11 | 7.35 | Solid motor chamber pressure, high | 0 to 100 psix |
| 15 | 10.5 | range, motor No. 1 Vibration, longitudinal axis. low | 0 to 800 psia |
| 13 | 14.5 | level, engine gimbal block Vibration, pitch axis, low level | ± 12 g |
| A | 22.0 | aft thrust structure, solid motor Solid motor chamber pressure high | ± 3 g |
| C | 40.0 | range, solid motor No. 2 Vibration Thick axis, high level | 0 to 800 psia |
| E | 70.0 | Junctic between thrust beams Subcommunity 45 PIM channels | 0 to 1,200 cps See 6.1.4 |



BOOSTER 354 TELEMETRY INSTRUMENTATION SCHEDULE


PIM Channel Assignments, Kit No. 1

| Channel | Function | Range |
|----------|---|--|
| 1. | 5-volt absolute ; | 0 to 5 volts |
| 2 | Instrumentation ground | 0 to 5 volts |
| 3. 4 | Main engine pitch position | |
| 4 | Main engine yaw position | + 2 degrees |
| 5 | Vernier engine No. 1 pitch position | + 2 degrees |
| 5 | Vernier engine No. 1 yaw position | + 45 degrees |
| 7 | Vernier engine No. 2 pitch position | -8 to -28 deg |
| 7 8 | Vernier engine No. 2 year position | + 45 degrees |
| 9 | Pitch attitude error | +8 to +28 deg |
| 10 | Roll attitude error | + 4 degrees |
| ii | Yaw attitude error | + 4 degrees |
| 12 & 34 | Pitch rate | + 6 degrees |
| 13 & 35 | Yaw rate | + 4 deg/sec |
| 14 & 36 | Roll rate | 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 |
| 15 | Pitch command | i + X deg/sec |
| 16 | | + 4.deg/sec |
| | Yaw command | ± 3.5 deg/sec |
| 17. | Actuator potentiometer positive voltage | 0 to 30 volts |
| 18 | Actuator potentiometer negative voltage | -13 to -30 volts |
| 19 | 400-cps voltage, phase A control inverter | 110 to 120 v |
| 20 | >-valt potentiometer excitation | 0 to 5 volts |
| 21 | Automatic gain control (HTL) | 0 to -90 dbm |
| 22 | Input supply voltage (BTL) | 20 to 36°volts |
| 23 | Missile battery voltage | 0 to 32 volts |
| 24 | Telemetry battery voltage | 0 to 32 volts |
| 25 | Hydraulic supply pressure | 0 to 4,000 psis. |
| 26 | Rydraulic return pressure | 0 to 200 psia |
| 27 | Turbopump speed | 0 to 200 psid |
| 28 | Turbine inlet temperature | 0 to 8,000 rpm |
| 29 | Fuel pump inlet pressure | 0 to 1,500 deg F |
| 30 | Static pressure, PX-1 | 0 to 200 psia |
| 31 | Static pressure, PX-2 | 0 to 15 psia |
| 32 | Static pressure, PX-3 | 0 to 15 psia |
| 33 | Static pressure, PX-4 | 0 to 15 psia |
| 12 & 34 | Pitch rate | 0 to 15 psia |
| 13 & 35 | Yaw rate | + 4 deg/sec |
| L4 & 36 | Roll rate | ± 3.5 deg/sec |
| 37 | | + 3.5 deg/sec + 8 deg/sec |
| 38 | Static pressure, PX-5 | 0 to 15 psia |
| | Static pressure, PX-6 | 0 to 15 psia |
| 39 40 | lox pump inlet pressure | 0 to 100 psia |
| | Main fuel tank top pressure | 0 to 100 psia |
| 41 | Gas generator lox injector pressure | 0 to 800 psia |
| 42 | Main lox tank top pressure | 0 to 100 psia |
| 43 | Lox pump inlet temperature | -275 to -300 deg F |
| 44 45 | Synchronization signal | 0 to 5 volts |
| | Synchronization signal | - / +U±VD |



POOSTER 354 TELEMETRY INSTRUMENTATION SCHEDULE PDM Channel Assignments, Kit No. 2

| Channel | Function | Range |
|----------------------|--|-----------------|
| 1 | 5-volt absolute | 0 40 5 - 31 |
| 2 | Instrumentation ground | 0 to 5 volts |
| 97-40-4-3 | 3- Colid motor chamber and grant and an area | 0 to 5 volts |
| ¥ | solid motor No.] | Not assigned |
| 4 | Static pressure, PX-7 | 0-to-100 pain |
| 5 | Static pressure, PX-8 | 0 to 15 psia |
| 6 | Static pressure, PX-9 | 0 to 15 psia |
| | Statio magazine, PALY | 0 to 15 psia |
| 7 8 | Static pressure, PX-10 | 0 to 15 psis. |
| ğ | Static pressure, PX-11 | 0 to 15 pain |
| 10 | Static pressure, PX-12 | 0 to 15 psia |
| ũ | Static pressure, PX-13 | 0 to 15 psia |
| 12 | Static pressure, PX-14 | 0 to 15 psia |
| | Static pressure, PX-15 | 0 to 15 psia |
| 13 14 | Static pressure, PX-16 | 0 to 15 psia |
| | Static pressure, PX-17 | 0 to 15 psia |
| 15 | Static pressure, PX-18 | 0 to 15 psia |
| 16 | Static pressure, PX-19 | A 4 - 3 m |
| 17 | Mozzle closure heat rate solid motor was | 0 to 30 * |
| 3, 18 . 33 | The state of the s | Not assigned |
| | solid motor No. 1 | O to 100 rais |
| 19 | Temperature bridge voltage (4.5 v) | 0 to 5 volts. |
| 20 | Temperature sensor. T-1 | O CO 5 VOLUE. |
| 21 | Temperature sensor, T-2 | 32 to 800 deg |
| 22 . | Temperature sensor, T-3 | 32 to 800 deg |
| 23 | Temperature sensor, T-h | 32 to 800 deg |
| 24 | Temperature sensor, T-5 | 32 to 800 deg |
| 25 | Temperature sensor, T-6 | 32 to 800 deg |
| 26 | Temperature sensor, T-7 | 32 to 800 deg |
| 27 | Temperature sensor, T-8 | 32 to 800 deg 1 |
| 28 | Temperature sensor, T-9 | 32 to 800 deg 1 |
| 29 | Temperature sensor, T-10 | 32 to 800 deg 1 |
| 30 | Temperature sensor, T-11 | 32 to 800 deg 1 |
| 31 | Temperature sensor, T-12 | 32 to 800 deg 1 |
| 32 | Temperature sensor, T-13 | 32 to 800 deg 1 |
| 18 2 22 | Solid motor chamber measure low range | 32 to 800 deg 1 |
| | solid motor No. 1 | Not assigned |
| 34 | Temperature sensor, T-14 | 0-to-100-peta |
| 35 | Nozzle throat heat rate | 32 50 800 deg 1 |
| 36 | Memberstane part left left left | 0 to 30 * |
| 37 | Temperature bridge voltage (0.5 v) | 0 to 5 volts |
| 37 38 | 5-volt potentiometer excitation | 0 to 5 volts |
| 39 . | Radiometer q, R-1 | 0 to 50 * |
| 37 40 | Radiometer q, R-2 | 0 to 50 * |
| 41 | Radiometer q, R-3 | 0 to 50 * |
| | Heating rate sensor, T-1 | 0 to 30 * |
| 42 | Heating rate sensor, T-2 | 0 to 30 * |
| 43 h h | Heating rate sensor T-3 | 0 to 30 * |
| 44 1. = | Synchronization s | 0 to 5 volts |
| 45 | Synchronization si | 0 to 5 volts |



IMBC 445925-D TAB 46 1164/360 26 February 1963

TAB 46

PROGRAM 162 LAUNCH TEST DIRECTIVE

(U)

for

PROGRAM 162 VEHICLE 1164/360

(U) Contract AF 04 (695)-233

APPROVED:

Gelser, Manager

Launch Systems Engineering, VAFB Lockheed Missiles & Space Company

Senior LMSC Member

Launch Test Working Group

APPROVED:

S. M. Abeles

Douglas Project Engineer, VAFB

Douglas Aircraft Company

Senior DAC Member

Launch Test Working Group

Brigge,

Director

Vandenberg Field Station

Bell Telephone Laboratories, Incorporated

A. Perry, Jr., Colonel, US

Deputy Commander Space Launches

6595th Aerospace Test Wing (AFSC)

LOCKHEED AIRCRAFT CORPORATION Missiles and Space Company Vandenberg Air Force Base, California

DOWNGRADED AT 3 YEAR INTERVALS: DECLASSIFIED AFTER 12 YEARS DOD DIR 5200:10

This document contains information affecting the national defense of the United States within the meaning of the espionage laws, Title 18 U.S.C., Sec. 793 and 794. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

Distribution: LMSC 223616-3

63-0917


QE MISSILES and SPACE DIVISION



CONTENTS TAB 46

| 1. | Introduction | Page |
|----------|--|-------|
| • | | 46-1 |
| 2. | Flight Test Information | |
| 3. | Flight Plan and Timed Events | 46-2 |
| 4. | | 46-3 |
| • | S-OlA Landline Instrumentation Schedule | 46-4 |
| 5• | Booster Landline Instrumentation Schedule | 46-6 |
| 6. | Booster Telemetry Instrumentation Schedule | |
| 7. | | 46-8 |
| 8. | Booster Magnetic Tape Track Assignments | 46-12 |
| . | Documentary Detailed Test Requirements | 46-13 |
| 9. | Camera Locations Pad 4 | , |
| 10. | RF Monitor List | 46-14 |
| | | 46-15 |





INTRODUCTION

This Tab applies to Program 162 Launch Test Directive, IMSC 445925-D, and should be inserted in the back of that publication. It covers launch preparation and launch of S-OlA satellite vehicle 1164 mated to SEV-2A booster 360. The vehicle is scheduled to launch from VAFB Complex 75-3, Pad 4 which has been modified accordingly.

This will be the second satellite launched with an SLV-2A booster. The solid motors attached to the booster require special pad safety precautions and also necessitate modified optical coverage of the vehicle in flight. The latter is covered in the basic LTD.

This will be the first launch with the BIL missile-borne guidance system installed in the S-OlA satellite vehicle. Commands to the booster will be routed through the SLV-2A/S-OlA BIL interface plug. The guidance phase will continue after separation and will terminate at about T + 460 seconds. The basic LTD is under revision to cover this topic more thoroughly.

Recovery of one of the three solid booster motors is desired, if it is floating.

The Pad 4 camera location diagram, page 46-14, should be used with optical data requirements in lieu of the figure contained in the basic LTD. Also, Documentary Photographic Requirements for Pad 4 on Page 46-13 should be used instead of those for Pad 5 appearing in the basic LTD. A future change to the basic LTD will cover all pads.

Surface Wind Limitations, SLV-2A/S-OlA Vehicles

The following surface wind restrictions supersedes those set forth in paragraph 7.8.3 of the basic LTD: A launch will not be attempted when the wind velocity at the launch site exceeds 40 knots from any direction, or when the wind velocity exceeds 30 knots from the critical sector. The critical wind sector for the launch emplacement is:


Launch Pad

Critical Wind Sector

000 to 135 degrees

Surface wind will restrict all activity at the launch pad requiring the vehicle to be erected. The standard SLV-2A/S-OlA may not be erected when surface winds, including gusts, exceed the following limits (in knots):


| Configuration | | C ===== |
|---|--------------------|------------------|
| Vehicle empty without solid motors | Toppling Condition | Launcher Pins In |
| Vehicle combined the motors | 16 | 46 |
| Vehicle empty with solid motors attac | hed 32 | 46 |
| S-OlA only loaded with solid motors a | ttached 37 | 41 |
| Vehicle loaded with solid motors atta | - | 37 |
| Vehicle loaded and pressurized with semotors attached | olid 63 | 64 |
| | | |



| Danah | • |
|--|--------------------|
| Booster | 6T W 04 0/0 |
| Satellite Vehicle | SLV-2A 360 |
| Taunch To 2 | 8-01A 1164 |
| Launch Pad | |
| Pad Azimuth | Complex 75-3 Pad 4 |
| Launch Azimuth | 181.5 deg |
| | 175 deg |
| Perigee | |
| Orbit Inclination Angle | 90 mm |
| part of the Control o | 75 deg |
| Period | |
| Gross Liftoff Weight (1) | 90.7 min |
| Copesing and Meridia (T) | 153,021 lbs |
| Scheduled Launch Date | 1/1 1/2 |
| | 14 March 1963 |

(1) Best information available as of 2/22/63. consideration may vary this weight. Payload changes under





FLIGHT PLAN BOOSTER 360

The flight controller program for the primary mission is:


Programmer Rates (deg/sec)


| Time (Sec) | Roll. | Pitch | Yaw |
|--------------------------|------------|--------|--------|
| 0 to 2.8446 | 0 | 0 | 100 |
| 2.8446 to 3.155 | +6.000 | ŏ | Ŏ: |
| 3.155 to 4 4 to 9.667 | 0. | • 0 | Ŏ. |
| 4 to 9.667 | 0 | -2.828 | Ö |
| 9.667 to 10 | 0 | 0 | Ö |
| 10 to 54.667 | • | -0.707 | Ö |
| 54.667 to 55 | 0 | 0 | Ô. |
| 55 to 79.667 | 0 | -0.525 | ŏ |
| 79.667 to 80 | 0 | 0 | ŏ |
| 80 to 89.667 | 0 | -0.218 | -0.862 |
| 89.667 to 90 | 0 | 0 | 0 |
| 90 to 90.7001 | +6.000 | -0.218 | ŏ |
| 90.7001 to 91.0331 | 0 | 0 | ŏ |
| 91.0331 to 170 | o , | -0.218 | ŏ |

TIMED EVENTS BOOSTER 360

The control system will be programmed for the following plan of events:

| Time (Sec) | Event |
|------------|---|
| T + 55 | Enable separation circuitry (solid motors) |
| T + 70 | Solid motor separation Roll gain change |
| T + 80 | Solid motor separation backup signal Guidance enable |
| T + 102 | Enable vernier engine yaw movement Main engine gain change |
| T + 138 | MECO enable |






LANDLINE INSTRUMENTATION SCHEDULE S-OLA VEHICLE 1164

RECORDER NO. 1

| Channel | Function |
|--------------------------------------|---|
| 1 2 3 4 5 6 7 8 | Guidance Gas Fill Line Drop He High Press. Fill Line Drop Fuel Fill Line Drop Acid Fill Line Drop Air Cond. Line Drop P/L Blanket Drop |
| 8 | Lift-Off |
| • | RECORDER NO. 2 |
| · 1 | |
| 1 2 3 4 5 6 7 8 | AP18 |
| 3 | API2 |
| 4 | AP 8 AP10 |
| 5 | AP 2 |
| 6 | AP 9 |
| 7 | AP 3 |
| 8 | Lift-off |
| | RECORDER NO. 3 |
| 1 2 3 4 5 6 7 8 | He Sphere Temp. |
| 2 | He Sphere Temp. |
| 3 h | No Sphere Temp. |
| 5 | N2 Sphere Temp. |
| 6 | He Line Press. |
| 7 | Guidance Gas Line Press. |
| 8 | Lift-Off |
| | RECORDER NO. 4 |
| 1 | Fuel Vent Line Press |
| 2 | Oxid Vent Line Press. |
| 3 | Oxid Vent Umbilical Connect |
| 2 3 4 5 6 7 8 | Fuel Vent Umbilical Connect |
| 6 | 100 E |
| 7 | Sni |
| 8 | Lift |
| | |





LANDLINE INSTRUMENTATION SCHEDULE (Cont'd)

S-OLA VEHICLE 1164

RECORDER NO. 5


| Channel | Function |
|--------------------------------------|--|
| 1 2 3 4 5 6 7 8 | + 28VDC Reg. -28 VDC Reg. Batt. Curr. |
| 8 8 | P/L Skin Temp Lift-Off |
| | RECORDER NO. 6 |
| 1 2 3 4 5 6 7 8 | Gas Valve 1 Gas Valve 2 Gas Valve 3 Gas Valve 4 Gas Valve 5 Gas Valve 6 Yaw Gyro Temp. Roll Gyro Temp. |





GROUND MONITOR SYSTEM

| FUNCTION | RANGE | NOMINAL VALUES |
|---|--------------|-------------------|
| Main liquid oxygen tank pressure | 0-50 psig | 33 psig |
| Main fuel tank pressure | 0-50 psig | 28 psig |
| Nitrogen storage tank bottle pressure | 0-8,000 psig | 6,000 psig |
| High-pressure missile bottle pressure | 0-5,000 psig | 3,000 psig |
| Vernier fuel start tank pressure | 0-1,000 psig | 646 psig |
| Vernier liquid oxygen start tank pressure | 0-1,000 psig | 646 psig |
| Engine regulator discharge pressure | 0-800 psig | 646 psig |
| Liquid oxygen storage tank pressure | 0-150 psig | 71 psig |
| Fuel storage tank pressure | 0-150 psig | 53 psig |
| Control manifold pressure | 0-200 psig | 135 psig |
| Transducer 5-volt supply | 0-10 volts | 5 volts |
| Hydraulic return pressure | 0-200 psig | 80 psig |





EVENTS RECORDER CHANNEL ASSIGNMENTS

| CHANNEL | TMENT |
|-----------------------------------|--|
| 1 | Base timing |
| 2 3 4 5 6 | Power on (sequence initiation) |
| 3 | Phase completion (mounts) |
| 4 | Phase completion (resets automatically) Flight controller on |
| 5 | Fuel storege tank mont |
| 6 | Fuel storage tank vent valve closed |
| 7 8 | Control manifold pressurizing valve open |
| | Missile bottles pressurizing valve open |
| 9 | Lox storage tank vent valve closed |
| 10 | Lox storage tank pressurizing valve open Hydraulics normal |
| וו | Engine centered |
| 12 | Engine off center |
| 13 14 | Engine recentered |
| | Launcher hydraulics normal |
| 15 | Missile bottles pressurized |
| 16 | Engine purge on |
| 17 | Main fuel tank vent valve open |
| 18 | Fuel storage tent water open |
| 19 | Fuel storage tank pressurizing valve open Fuel fine load valve open |
| 20 | Lox fine load valve open |
| 21 | Lox rapid load valve open |
| 22 | Fuel rapid load valve open |
| 23 | Main lox tank vent valve open |
| 24 | 97% fuel |
| 25 26 | 100% fuel |
| 26 | |
| 27 28 | Main fuel tank pre-pressurizing valve open |
| 28 | PTL guidance on internal power |
| 29 | Inverter on |
| 30 | Inverter on internal |
| 31. 32 33 34 35 36 | Flight controller on internal |
| 32 | Booster on internal power |
| 33 | Laurcher clear to fire |
| 34 | Lox transfer resume |
| 35 | Main lox tank vent valve boost close |
| | Main low tenk man water boost close |
| 37 | Main lox tank pre-pressurizing valve open |
| 38 | 100% lox |
| 39 40 | Main propellant tanks pressurized |
| | Propellant transfer complete |
| 41 | Engine start |
| 42 | Liftoff |
| 43 | Technical hold imposed |
| 11 1 | Malfunction |
| 45 | Propellant hold over-ride |
| 46 | I'l 1 gift gowless and the same |
| 47 | Phase V holy very live over-ride |
| 48 | "Producting the 1" |
| 49 | Liftoff sig |
| 50 | Tradition 2019 |
| D AIRCRAFT CO | RPORATION MISSILES and SPACE DI |



BOOSTER TELEMETRY INSTRUMENTATION SCHEDULE

FM/FM CHANNELS, KIT NO. 1


| FM/FM CHANNEL | CENTER FREQUENCY | FUNCTION | RANGE |
|------------------|---------------------|---|---------------------|
| 7 | . 0.3 | | AVAIGES |
| • | 2.3 | Solid motor chamber pressure, low range solid motor No. 3 | 0 to 100 psia |
| 8 | 3.0 | Vernier engine No. 2 chamber pressure | |
| 9 | | Not Assigned | 0 to 500 psia |
| 10 | 3.9 5.4 | | |
| | - | Sequence No. 1: fuel and lox float switches, MSCO, VECO | 0 to > volts |
| 11 | 7-35 | Main engine chamber pressure, close- coupled transducer | 0 to 800 psia |
| 12 | 10.5 | Not Assigned | |
| 13 | 14.5 | | 1 |
| | - | Vibration, pitch axis, low level, forward thrust structure, solid motor | ± 3 g |
| A | 22.0 | Solid motor chamber pressure, high | 0.000 |
| | Ì | range, solid motor No. 3 | 0 to 800 psia |
| C | 40.0 | Vibration, high level, gimbal block | |
| Ì | 1 | area, longitudinal axis | 0 to 1,200 cps |
| E | 70.0 | Subsequent of a large service | |
| | | Subcommutated to 45 PDM channels | See Kit 1, Pg. 46-9 |

FM/FM CHANNELS, KIT NO. 2

| FM/FM CHANNEL | CENTER FREQUENCY | FUNCTION | RANGE |
|------------------|---------------------|---|----------------------|
| 7 | 2.3 | Sequence No. 3: solid motor removals, | |
| 8 | 3.0 | no. 1, no. 2, no. 3 | 0 to 5 volts |
| | | Sequence No. 2: ignition switches 1 & 2 pickup, separation signals (primary & backup) | 0 to 5 volts |
| 9 | 3•9 5•4 | Vehicle axial acceleration | |
| 10 | 5.4 | Solid motor chamber pressure, low | 0 to 8 g |
| | | range, solid motor No. 2 | 0 to 100 psia |
| 111 | 7 - 35 | Solid motor chamber pressure, high | 0 to 800 psia |
| 12 | 10.5 | range, solid motor No. 1 | 0 to ooo psia |
| | | Vibration, low level, engine gimbal block longitudinal axis | <u>+</u> 12 g |
| 13 | 14.5 | Vibration, low level, aft thrust | <u>+</u> 3 g |
| A | 22.0 | structure, solid motor, pitch avia | |
| | | Solid motor chamber pressure, high | 0 to 800 psia |
| c | 40.0 | range, solid motor No. 2 Vibration, pitch axis, high level, | |
| | | function how hot man them. | 0 to 1,200 cps |
| E | 70.0 | junction box between thrust beams Subcommutated to 45 PDM channels | |
| <u> </u> | | The Chemists | See Kit 2, Pg. 46-10 |

* BTU per square foot per secon





BOOSTER TELEMETRY INSTRUMENTATION SCHEDULE

PDM CHANNEL ASSIGNMENTS, KIT NO. 1

| CHANNEL | FUNCTION | RANGE |
|----------|---|--------------------|
| 1 | 5-volt absolute | O to 5 volts |
| 2 | Instrumentation ground | 0 to 5 volts |
| 3 | Main engine pitch position | + 2 degrees |
| 4 | Main engine yaw position | + 2 degrees |
| 5 | Vernier engine No. 1 pitch position | + 45 degrees |
| | Vernier engine No. 1 yaw position | -8 to -28 degrees |
| 7 8 | Vernier engine No. 2 pitch position | + 45 degrees |
| | Vernier engine No. 2 year position | +8 to +28 degrees |
| 9 | Pitch attitude error | + 4 degrees |
| 10 | Yaw attitude error | + 4 degrees |
| 11 | Roll attitude error | + 6 degrees |
| 12 & 34 | Pitch rate | + 4 deg/sec |
| 13 & 35 | Yaw rate | + 3.5 deg/sec |
| 14 & 36 | Roll rate | + 8 deg/sec |
| 15 | Pitch command | + 4 deg/sec |
| 16 | Yaw command | + 3.5 deg/sec |
| 17 | Actuator potentiometer positive voltage | 0 to 30 volts |
| 18 | Actuator potenticmeter negative voltage | -13 to -30 volts |
| 19 | 400-cps voltage, phase A control inverter | 110 to 120 volts |
| 20 | 5-volt potentiometer excitation | i |
| 21 | Main engine chamber pressure** | 0 to 5 volts |
| 22 | Not assigned | 0 to 800 psia |
| 23 | Missile battery voltage | 0 +0 30 1+ |
| 24 | Telemetry battery voltage | 0 to 32 volts |
| 25 | Hydraulic supply pressure | 0 to 32 volts |
| 26 | Hydraulic return pressure | 0 to 4,000 psia |
| 27 | Turbopump speed | 0 to 200 psia |
| 28 | Turbine inlet temperature | 0 to 8,000 rpm |
| 29 | Nozzle closure heat rate, solid motor No. 2 | 0 to 1,500 deg F |
| 30 | Static pressure, PX-1 | 0 to 50 BTU* |
| 31 | Static pressure, PX-2 | 0 to 15 psia |
| 35 | Static pressure, PX-3 | 0 to 15 psia |
| 32 33 | Static pressure, PA-5 | 0 to 15 psia |
| 12 & 34 | Static pressure, PX-4 Pitch rate | 0 to 15 psis |
| 13 & 35 | | + 4 deg/sec |
| 14 & 36 | Yaw rate | ± 3.5 deg/sec |
| | Roll rate | + 8 deg/sec |
| 37 | Static pressure, PX-5 | 0 to 15 psia |
| 38 | Static pressure, PX-6 | 0 to 15 psia |
| 39 40 | Nozzle throat heat rate, solid motor No. 2 | 0 to 50 BTU* |
| | Main fuel tank top pressure | 0 to 100 psia |
| 41 | Gas generator lox injector pressure | 0 to 800 psis |
| 42 | Main lox tank top pressure | 0 to 100 psia |
| 43 | Lox pump inlet temperature | -275 to -300 deg F |
| 44 | Synchronization signal | 0 to 5 volts |
| 45 | Synchronization usignal | 0 to 5 volts |


^{*} BTU per square foot per second ** Cross-strapped with FM channel

BOOSTER TELEMETRI INSTRUMENTATION SCHEDULE

PDM CHANNEL ASSIGNMENTS, KIT NO. 2

| CHANNEL | PUNCTION | RANGE |
|------------------|--|------------------------------|
| 1 | 5-volt absolute | 0 +- 5 1 |
| 2 | Instrumentation ground | 0 to 5 volts |
| 3 | BOLId motor chamber pressure law manus | 0 to 5 volts |
| 1. | 1 | 0 to 100 psia |
| 4 | Static pressure. PX-7 | _ |
| 5 6 7 8 | Static pressure, PX-8 | 0 to 15 psia |
| 6 : | Static pressure, PX-9 | 0 to 15 paia |
| 7 | Static pressure, PX-10 | 0 to 15 psia |
| | Static pressure, PX-11 | 0 to 15 psia |
| 9 | Static pressure, PX-12 | 0 to 15 psia |
| 10 | Static pressure, PX-13 | 0 to 15 psia |
| 11 | Static pressure, PA-13 | 0 to 15 psis |
| 12 | Static pressure, PX-14 | 0 to 15 psia |
| 13 | Static pressure, PX-15 | 0 to 15 psia |
| 14 | Static pressure, PX-16 | 0 to 15 psia |
| 15 | Static pressure, PX-17 | 0 to 15 psia |
| 16 | Static pressure, PX-18 | 0 to 15 psis |
| | Static pressure. PX-10 | 0 to 15 psia |
| 17 18 | Static pressure PY_20 | 0 to 15 psia |
| 70 | Solid motor chamber pressure low | 0 to 15 psia |
| | POTTO MOTOL NO. 1 | 0 to 100 psia |
| 19 | Temperature bridge voltage (4.5 volta) | |
| 20 | Temperature sensor T-1 | 0 to 5 volts |
| 21 | Temperature sensor T-2 | 0 to 800 deg F |
| 22 | Temperature sensor T-3 | 0 to 800 deg F |
| 23 | Temperature sensor T-4 | 0 to 800 deg F |
| 24 | Temperature sensor T-5 | 0 to 800 deg F |
| 25 | Temperature sensor T-6 | 0 to 800 deg F |
| ≥ 6 ′ | Heating rate sensor T-4 | 0 to 800 deg F |
| 27 | Temperature sensor Tut | Or to 30 BIU# |
| 28 | Temperature sensor T-8 | o to 800 deg F |
| 29 | Temperature sensor T-9 | 0 to 800 deg F |
| 30 | Temperature sensor T-10 | 0 to 800 deg r |
| | Temperature sensor T-11 | 0 to 800 deg F |
| 31 32 | Temperature sensor 7.12 | 0 to 800 deg F |
| | neating rate sensor T.5 | 0 to 800 deg F |
| 33 | Bolid motor chamber pressure less many | 0 to 30 BTU* |
| | MO. T | 0 to 100 psia |
| 34 | Temperature sensor T-14 | |
| 35 | Temperature sensor T-15 | 0 to 800 deg F |
| 6 | Temperature bridge voltage (0.5 volt) | 0 to 800 deg F |
| 7 | 5-volt potentiometer excitation | 0 to 5 volts |
| 3 | Radiometer q R-1 | 0 to 5 volts |
| 9 | Radiometer q R-2 | 0 to 50 PTU* |
| Ó | Redicates a D o | 0 to 50 BTUM |
| 1 | Radiometer q R-3 | 0 to 50 BTUM |
| 2 | Heating rate sensor T-1 | 0 to 30 BTU* |
| 3 | Heating rate sensor T-2 | 0 to 30 BTU* |
| 4 : | Heating rate sensor T-3 | 0 +0 30 mm |
| | Synchronization Fignal | 0 to 30 BTUM |
| 5 | Synchronization signal | 0 to 5 volts 0 to 5 volts |


^{*} BIU per square foot per secon




BOOSTER TELEMETRY INSTRUMENTATION SCHEDULE

CHANNEL ASSIGNMENTS, KIT NO. 3


| FM/FM CHANNEL | PREQUERCY | FUNCTION | RANGE |
|------------------|-----------|---|-----------------|
| 9 | 3.9 | Lox pump outlet pressure | 0 to 1,000 psia |
| 10 | 5.4 | Fuel duct outlet pressure | 0 to 1,000 psia |
| 11 | 7-35 | Lox pump inlet pressure | 0 to 100 psia |
| 12 | 10.5 | Fuel pump inlet pressure | 0 to 200 psia |
| 13 | 14.5 | Yaw acceleration, engine relay box | <u>+</u> 10 g |
| A . | 22.0 | Pitch acceleration, engine relay | <u>+</u> 10 g |
| C | 40.0 | Longitudinal acceleration, engine relay box | -5 to +20 g |
| E | 70.0 | Axial acceleration, lox dome | <u>+</u> 25 g |





BOOSTER MAGNETIC TAPE TRACK ASSIGNMENTS


| RECORDER | TRACK | DIRECT RECORDING ASSIGNMENT (60 IPS) |
|----------|-------|---|
| | | |
| 1 | 1 | 100-pps timing, AMR format D-5, modulated on 1 kg |
| 1 | 2 | SIV-2A telemetry link No. 1 primary, 100-ke wow and flutter (Tango 48) |
| 1 | 3 | SLV-2A telemetry link No. 2 primary, 100-ke wow and flutter (Tango 61) |
| 1 | 4 | 60-cps, 17-ke speedlock; AGC No. 1 (5.4 ke); AGC No. 2 (7.35 ke); AGC No. 3 (10.5 ke); AGC No. 4 (14.5 ke); liftoff signal (22 ke); voice (30 ke) |
| 1 | 5 | SIW-2A telemetry link No. 3 primary, 100-ke wow and flutter (Tango 90) |
| 1 | 6 | SO-1 telemetry link No. 2 primary, 100-ke wow and flutter |
| 1 | 7 | 1-pps timing, AMR format B-1, modulated on 1 kc |
| 2 | 1 | 100-pps timing, AMR format D-5, modulated on 1 kc |
| 2 | 2 | SIV-2A telemetry link No. 1 secondary, 100-ke wow and flutter |
| 2 | 3 | SLV-2A telemetry link No. 2 secondary, 100-kc wow and flutter |
| 2 | 14 | 60-cps, 17-kc speedlock; AGC No. 1 (5.4 kc); AGC No. 2 (7.35 kc); AGC No. 3 (10.5 kc); AGC No. 4 (14.5 kc); liftoff signal (22 kc); voice (30 kc) |
| 2 | 5 | SLV-2A telemetry link No. 3 secondary, 100-ke wow and flutter |
| 2 | 6 | SO-1 telemetry link No. 2 secondary, 100-ke wow and flutter |
| 2 | 7 | 1-pps timing, AMR format B-1, modulated on 1 kc |







| | 1 | | | | | | | | | |
|--|---------------------|----------------------------|--|--|--|-------------------------------|-------------------------------|--------------------------------|----------------------------|----------------------------|
| | Page 4 | COVERAGE | Tracking | Tracking | Tracking | Tracking | Pictorial Liftoff | Pictorial Liftoff | Pictorial Liftoff | Pictorial Liftoff |
| TREMENTS | OPTIMUM EX- | AND MAKE ANTIO POSURE AREA | • Missils | Missile | Missils | Missile | Missile | Missile | Miseile | Missils |
| DETAILED TEST REQUIREMENTS COMPLEY 78.2 4.2. | DAAGE TO OF | TO FRAME RAT | 24 Entire Vabicle to Fill 4/5 Fr. at Liftoff | 24 Entire Vehicle to Fill 4/5 Fr. at Liftoff | 24 Entire Vehicle to Fill 4/5 Fr. at Liftoff | | | N/A Vehicle Fills 2/3 Frame | Vehicle Fills 2/3 Frame | Vehicle Fills 2/3 Frame |
| DETA | EMULSION T- to T+ w | | 100 202 100 TOA | ECO 208 LOV 2 | ECO 208 LOV 2 | 70mm Anscochrome 5S Runout 10 | 70mm Anscochrome 5S Runout 10 | Anscochrome N/A N/A | Anscochrome N/A N/A | BLW N/A N/A |
| 4 9. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. | N SIZE | TS-6A 16mm | | TS-8 lómm | LE-6 l6mm | TS-6A 70mm Ans | В 70mm Аля | В 4х5 Аляс | A 4x5 Anse | H 625 |
| TEN | | 12.1 | | 2.2 | 12. 3 | 12. 4 | 12. 5 | 1 2. 6 | - 21 | 12.8 |





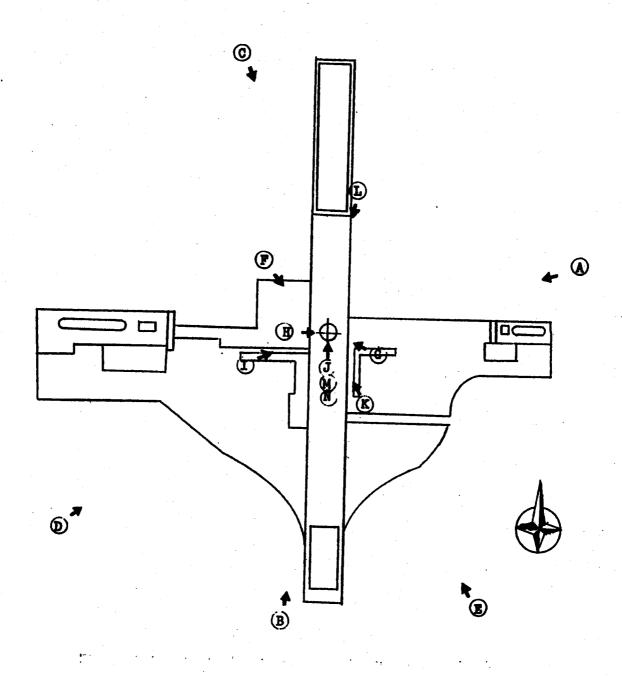





SATELLITE VEHICLE 1164

EQUIPMENT CODE Vehicle Link I Vehicle Link II **T-60** Vehicle Link IV T-59 Acquisition Beacon T-28 Capsule TIM T-25 Capsule Beacon and Drop Marker T-59 VERLORT Receiver T-65 VERLORT Transmitter S-30D Auxiliary Command System 8-68P Special Projects Command **v-89 V-9**5

BOOSTER 360

| ILM Kit | 1 | | | |
|---------|---|--|--|------|
| TLM Kit | 2 | | | T-48 |
| TIM Kit | 3 | | | T-61 |
| | | | | T-90 |





IMSC 445925-D **TAB 47** 1160/376 7 March 1963

TAB 47

LAUNCH TEST DIRECTIVE FOR VEHICLE 1160/376 CONTRACT AF 04 (695)-233

Approved:

Launch Systems Engineering, VAFB Lockheed Missiles & Space Company Senior LMSC Member

Launch Test Working Group

Approved:

S. M. Abeles

Space Systems Project Engineer, VAFB

Douglas Aircraft Company

Senior DAC Member

Launch Test Working Group

Approved

K. Briggs

Director, VAFB Field Station

Bell Telephone Laboratories, Incorporated

Senior BIL Member

Launch Test Working Group

Approved:

Deputy Compander Space Systems

6595th Aerospace Test Wing

Development) AFSC


LOCKHEED AIRCRAFT CORPORATION Missiles and Space Company Vandenberg Air Force Base, California

DOWNGRADED AT 3 YEAR INTERVALS; DECLASSIFIED AFTER 12 YEARS DOD DIR 5200.10

This Document Contains Information Affecting The National Defense Of The United States Within The Meaning Of The Espionage Laws, Title 18, U.S.C., Sections 793 and 794. Its Transmission Or The Revelation Of Its Contents In Any Manner To An Unauthorized Person Is Prohibited By Law.

Distribution - LMSC 223616-3

63-1002



OF.

CYS-



TAB 47

CONTENTS

| 1. | Introduction | PAGE |
|-----|---|--------|
| 2. | Flight Test Information | 47-1 |
| 3• | Booster Flight Plan | 47-2 |
| 4. | | 47-3 |
| 5. | RF Monitor List | 47-4 |
| 6. | Satellite Vehicle Landline Instrumentation Schedule | 47-5 |
| | Booster Landline Instrumentation Schedule | 47-6 |
| 7. | Booster Telemetry Instrumentation Schedule | 47-7 |
| 8. | Booster Magnetic Tape Track Assignments | 47-8 |
| 9• | Weather Conditions | . • |
| 10. | Optical Coverage | 47-9 |
| 11. | Booster Configuration | 47-10 |
| 12. | Integrated Milestone Countdown Chart | 47-11 |
| | - Contract of | 47-1 3 |





INTRODUCTION

This tab covers the launch of SLV-2 booster 376 mated to S-OlA satellite vehicle 1160. It is to be used with Program 162 Launch Test Directive, IMSC 445925-D, and should be inserted in the back of that publication.

Since the basic LTD is primarily devoted to SLV-2A booster launches, portions of the following items will differ for this launch:

Booster configuration
Booster pad checks
Countdown chart
Optical coverage
Weather conditions

(4.2.1) (5.7) (Figure 6-2)

(7.8)

References to solid motor fit checks in paragraph 4.7 of the basic LTD should be disregarded. Information to clarify other items is set forth on separate pages in this tab as listed in the index.

The BTL guidance system for this launch will be installed in the booster.



FLIGHT TEST INFORMATION

LMSC 445925-D TAB 47 1160/376

Booster
Satellite Vehicle
Launch pad
Pad azimuth
Launch azimuth
Primary flight mission (1):

SLV-2 serial 376 8-01A serial 1160 75-3, Pad 5 218.4 deg 172 deg

Perigee Orbit inclination angle Period

113 nm 75 deg 90.7 min

Alternate flight mission (2):

Perigee Orbit inclination Period

113 nm 81.8 deg 91.0 min

Scheduled launch date Launch window Gross lift-off weight


22 February 1963 To be announced 123,706 lbs. (3)


(1) Reference LMSC A094529-4.

This mission will be used unless further notice is given.

- (2) Reference LMSC A094529-7.
- (3) Weight based on information available on 14 February 1963.

 May vary slightly at launch.





BOOSTER 376

FLIGHT PLAN


Booster 376 will lift off with the payload with a sea-level thrust of 172,000 pounds (+ 3 per cent). The flight controller in booster 376 will be programmed for a 113-mm/75-deg mission at the following rates and times:

| Time (sec) | Roll. | Programmer Rates Pitch | (deg/sec) |
|---------------------|---------|------------------------|-----------|
| 0 to 2 | 0 | • | |
| 2 to 15 | +3-577 | 9 | 0 |
| 15 to 17 | _ ` ` ` | O | . 0 |
| 17 to 34.667 | .0 | 0 | 0 |
| 34.667 to 35 | 0 | -0.932 | Õ |
| 35 to 69.667 | . 0 | 0 | ŏ |
| 69.667 to 70 | 0 | -0.700 | ŏ |
| 09.001 to 10 | 0 | 0 | • |
| 70 to 89.667 | 0 | -0.592 | O |
| 89.667 to 90 | Ď | -0.592 | 0 |
| 90 to 130 | • . | O | 0 |
| 130 to 131 | 0 | -0.291 | 0 |
| 121 to 130 alor | 0 | 0 | Ŏ |
| 131 to 132.3405 | +3.577 | 0 | Ŏ |
| 132.3405 to burnout | 0 | 0 | 0 |

T+147 (+5) The booster will execute main engine cutoff (MECO; velocity at MECO will not be less than 500 ft/sec below the nominal established for the mission.

MECO + 9 (± 0.9) The booster will execute vernier engine cutoff (VECO). Pitch flight path angle at VECO will be within 4 degrees of the nominal.





R. F. MONITOR LIST

SATELLITE VEHICLE

| Vehicle Link I | | | | CODE |
|----------------------------|--|----|------|-------------|
| Vehicle Link TT | | | | T-60 |
| Acquisition Beacon | | | . •• | T-59 |
| Capsule TIM | | *. | | T-25 |
| Capsule Rescon and Dans W. | | | | M 50 |

VERLORT Receiver

VERLORT Transmitter

Auxiliary Command System


Special Projects Command

V-89

V-05




EQUIPMENT




LMSC 445925-D Tab 47 1160/376

SATELLITE VEHICLE LANDLINE INSTRUMENTATION SCHEDULE -- VEHICLE 1160

| RECORDER DI | RECORDER D2 |
|--|--|
| CH. DAC Liftoff Time Pulse | |
| 1 DAC Liftoff | CH. 1 Pitch Servo |
| 2 Time Pulse | |
| 3 Roll Gyro Out | 2 Yaw Servo |
| 4 Open | 3 Pitch Actuator |
| 5 Open | 4 Yaw Actuator |
| 5 Open 6 Gas Valves 1-6 | 5 Vel No. Readout |
| | 6 Counterwarning |
| RECORDER 1 | DECOMPAN A |
| COT . | RECORDER 2 |
| CH. | CH. |
| 1 Yaw Gyro Temp | |
| 2 Roll Gyro Temp 3 Accelerometer Temp 4 Oven Temp | ATT INT AC T |
| 3 Accelerometer Temp | 2 Gas Valve 2 |
| 4 Oven Temp | 3 Gas Valve 3 |
| 5 Open 6 Open | |
| 6 Open | 5 Gas Valve 5 |
| 7 Open 8 Open | |
| 8 Open | 7 Open 8 P/L Strip Thomas |
| | 8 P/L Skin Temp |
| RECORDER 3 | PEGODDED 1. |
| And the second s | RECORDER 4 |
| CH. | CH. |
| Helium Line Press. | |
| 2 Guidance Gas Line Press. 3 Open 4 UDMH Sniffer 5 IRFMA Sniffer 6 Open | 1 Open 2 Open |
| 3 Open | 2 Open |
| 4 UDMH Sniffer | 3 M2 Sphere Temp, High Scale 4 M2 Sphere Temp Low Seel |
| 5 IRFNA Sniffer | |
| 6 Open | J HE Sphere Temp. Low Roals |
| 7 Open 8 Open | Trace Temp. Migh Scale |
| 8 Open | i or vent fress. |
| · | 8 Fuel Vent Press. |
| CEC RECORDER (36 CHANNEL) | PBCODARD 10 / |
| | RECORDER 13 (EVENTS) |
| CH. | M |
| 7 Battery Current | CH. 26 Fuel Vent |
| 12 115 V, 400 CPS, d AR | |
| 14 Battery Voltage | 27 Ox. Vent Umb Conn 28 Umbilical Drop |
| 10 -28 VDC Reg | |
| 20 +28 VDC Reg | 29 DAC Liftoff |
| 21 115 V, 400 CPS, Ø BC | 30 Time Pulse |
| +20 VDC, Ext Pwr Supply | |
| 26 115 V, 400 CPS, Ø AC | |
| | |






BOOSTER LANDLINE INSTRUMENTATION SCHEDULE

| Function | Dome | | Nominal |
|--|---------|-------|------------|
| Main liquid owner ton | Rang | (e | Values |
| Main liquid oxygen tank pressure Main fuel tank pressure | 0-50 | psig | 33 psig |
| Nitrogen storage tank bottle pressure | 0-50 | psig | 28 psig |
| | 0-8,000 | Deig | 6,000 psig |
| Righ-pressure missile bottle pressure | 0-5,000 | psig | 3,000 psig |
| Vernier fuel start tank pressure | 0-1,000 | psig | 646 psig |
| Vernier liquid oxygen start tank pressure | 0-1,000 | psig | 646 psig |
| Engine regulator discharge pressure | 0-800 | psig | 646 psig |
| Liquid oxygen storage tank pressure | 0-150 | psig | 71 paig |
| Fuel storage tank pressure Control manifold pressure | 0-150 | psig | 53 paig |
| Transducer 5-volt supply | 0-200 | psig | 135 psig |
| | 0-10 | volts | 5 volts |
| Hydraulic return pressure | 0-200 | psig | 80 psig |


LOCKHEED AIRCRAFT CORPORATION





BOOSTER CHANNEL ASSIGNMENTS, IN-FLIGHT TELEMETRY (FDM)


| PM/PM Channel | Center Frequency | Function | |
|------------------|---------------------|--|------------------------|
| 8 | 3.0 | | Range |
| 9 | 3.0 3.9 | Vernier engine No. 2 chamber pressure | 0 4- 500 |
| 10 | | Administration DIT Comments | |
| ü | 5.4 | Main engine chamber | 0 to 5 volts |
| 494465 | 7-35 | coquence No. 1: fiel & los elect | 0 to 800 psia |
| 12 | 10.5 | · TALUCIDAR MESTI VINA | 0 to 5 volts |
| R | 70.0 | Magnetron current (part) | 0 to 100% |
| | 10.0 | FIN/TH/TM | See below |
| PDN/JN | • | | 300 30200 |
| Channel | | Function | Range |
| 1 | 5-volt al | Boliste | werde |
| 2 | Instrume | rtation ground | 0 to 5 volts |
| 3 4 | Main eng | ine pitch position | 0 to 5 volts |
| . 4 | Main ang | ne yes position | ± 2 degrees |
| 5 | Vernier | me Jes position | + 2 degrees |
| 6 | Vernier | ingine No. 1 pitch position | + 20 degrees |
| 7 | Vernier | engine No. 1 yew position | 0 to -20 deg |
| 8 | Vernier | ingine No. 2 pitch position | + 20 degrees |
| 9 & 31 | Pitch ett | ngine No. 2 yew position itude error | 0 to +20 deg |
| 10 4 32 | Yaw attit | ude error | + 4 degrees |
| 11 & 33 | | tude error | + 4 degrees |
| 12 & 34 | Pitch rat | onne alloh | ± 4 degrees |
| 13 4 35 | Yay rate | | + 2 deg/gen |
| 14 + 36 | Roll rate | | 7 2 deg/sec |
| 15 & 37 | Pitch com | mard | + 8 deg/sec |
| 16 & 38 | Yew comme | 7 | + 3.5 deg/sec |
| 17 | Actuator | potenticmeter positive | + 3 5 deg/gen |
| 18 | Actuator | potentiometer negative | 0 to 30 volts |
| 19 | 400-cps v | Oltage, phase A (control inverter) | -13 to -30 volt |
| 20 | 5-volt por | tentiometer excitation | 110 to 120 volt |
| 21 | Automatic | gain control (BTL) | 0 to 5 volts |
| 22 | Input suor | by voltage (BTL) | 0 to -90 dbm |
| 23 | Missile be | ttery voltage (MLL) | 20 to 36 volta |
| 24 | TATOMECLA | battery wilters | 0 to 32 volts |
| 25 | Hydraulic | subbly breasure | 0 to 32 volts |
| 26 | Rydraulic | return pressure | 0 to 4,000 psis |
| 27 | Taroobamb | speed. | U to 200 psia |
| 28 | Turbine in | let temperature | 0 to 8,000 rm |
| 29 | Fuel pump | inlet pressure | 0 to 1,500 deg 1 |
| 30 | Spare | - Le Annual C | 0 to 200 psis |
| 39 | Lox pump is | alet pressure | |
| 10 | Main fuel | tank ton magazine | 0 to 100 psia |
| 1 | cas Reticis. | COT lox injection processes | 0 to 100 psia |
| 12 | | ALK TOD DECKEDISM | 0 to 800 psia |
| 3 | rox brimb 11 | llet temperature | 0 to 100 psia |
| 4 | Framing sig | mal | -275 to -300 des |
| 5 | Framing sig | mal | 0 to 5 volts |
| IEED AIPCPA | AFT CORPORATIO | | 0 to 5 volts |
| | " I CORPORATIO | IN CONTRACTOR OF THE PARTY OF T | LES and SPACE DIVISION |



MAGNETIC TAPE TRACK ASSIGNMENTS (PDM)

| Track | Assignment | Туре |
|-------|---|-----------------|
| 1 | Pulse-duration modulation (70 KC) | Pulse Record |
| 2 | Agena telemetry receiver No. 1; 100-KC wow & flutter | Direct |
| 3 | Thor telemetry receiver No. 2; 100-KC wow & flutter | Direct |
| 4 | 60 CPS, 17-KC speedlock AGC No. 1)5.4 KC) AGC No. 2 (7.35 KC) AGC No. 3 (10.5 KC) Liftoff signal (22 KC) Voice (30 KC) | Direct |
| 5 | Thor telemetry receiver No. 3; 100-KC wow & flutter | Direct |
| 6 | 100-PPS, 17-bit binary-coded timing, modulated on 1 KC | Direct |
| 7 | 1-PPS, 17-bit binary-coded timing, modulated on 1 KC | Direct |

Recording speed (all tracks): 60 IPS



WEATHER CONDITIONS

General Information

Since there are no solid motors, the weather restrictions for launch will be similar to those established for previous program 162 launches in lieu of those set forth in 7.8 of the basic LTD. The latter applies specifically to SLV-2A launches.

Visibility

Visibility requirements set forth in paragraph 7.8.1 of the basic LTD, which provides for optical coverage of booster in flight, should be disregarded. There are no visibility restrictions for this launch.


Wind Restrictions


Upper winds could become critical to a launch; severe wind shear should be reviewed for its effect on the vehicle trajectory. Other elements of upper weather will not normally affect a launch schedule.

Surface weather conditions, except for wind velocity, will not normally affect a launch schedule. The space system's maximum wind tolerance, 50 knots, is limited by the characteristics of the umbilical mast.

Before fueling and pressurization have been completed, the following surface wind restrictions (in knots) are applicable:

| Fuel Load | Toppling Condition | Launcher Pins in | Pins in and Clamshells Closed |
|---------------------|-----------------------|---------------------|----------------------------------|
| Vehicle empty S-Ola | 17 | 50 | 50 |
| Vehicle loaded | 27 | 50 | 50 |
| Aentere Towned | 45 | 45 | 50 |







OPTICAL COVERAGE

Tables 8-1 and 8-2 in the basic LTD will be used for engineering sequential and documentary optics coverage respectively, with the exception that any reference to solid motors will be disregarded.

The LA-24 camera mount will be used for PMR photographic film requirements only. The two MOTU camera mounts set forth in Table 8-4 of the basic document are not required. The LA-24 coverage will be the vehicle instead of solid rockets for this launch.





BOOSTER CONFIGURATION

The basic LTD describes the SLV-2A booster. Since 376 is in the SLV-2 configuration, the description set forth herein will apply.

The design of the Douglas model IM-21 space booster has been adapted from the SM-75 intermediate range ballistic missile (IRBM). Design criteria are outlined in Performance Specification DS-2110A, dated 28 July 1960. The booster has been adapted to the IM-21 configuration from the IM-18 design in accordance with top drawing 5864277.

Airframe

The airframe consists of a cylindrical two-tank structure with a base diameter of 8 feet, and a forward conical section, the diameter of which tapers from 8 to 5.33 feet. The lox tank vent valve includes an elbow assembly to direct gas diffusion after MECO.

Propulsion System

The propulsion system consists of a gimballed Rocketdyne MB-3 Block II main engine and two vernier engines. The main engine will be rated at 170,000 pounds thrust (+ 3 per cent) at sea level; vernier engines are rated at 1,000 pounds thrust (+ 3 percent) at sea level. The propellant system also includes two main propellant tanks, two vernier engine start and solo tanks, a gas generator, a turbopump, propellant lines, and associated plumbing. Propellants will be liquid oxygen (LOX) and RJ-1 fuel (a kerosene-like

The main engine gimbals to provide pitch and yaw attitude control; the vernier engines provide roll stabilization.

BIL Command Guidance System

The BIL command guidance system consists of a precise, ground-based guidance radar, a Remington-Rang-Univac (RRU) Athens computer, and a series 400 missile-borne guidance equipment (MBGE) set.

Guidance radar determines the booster position as it tracks the missile. Position information is fed into the RRU computer, where it is continuously compared with the planned trajectory. From the comparison, the computer develops appropriate steering orders and discrete commands for guiding the vehicle on the required trajectory. The commands are fed from the computer to the ground radar, where they provide intelligence to the signal sent to the MRGE (in the booster). The MRGE processes the commands and forwards them to the flight controller. Telemeters will monitor response of the MBGE to the orders and commands which the ground guidance radar has sent.

Control System

The booster autopilot system is designed to stabilize and control the booster during powered flight. The major components of the system are the power equipment. electrical



Electrical Equipment

In addition to the flight controller and the three JRT-45 rate gyros, electrical equipment includes: a Bendix inverter (115 volts ac, three phase, 400 cps, 1.5 kilovolt-amperes), one Yardney 28.5-volt battery for missile control power, one Yardney 28.5-volt battery for guidance system power, two instrumentation batteries, and associated wiring. The inverter supplies ac power to the flight controller. The missile control battery is the primary power source for the engine relay box circuits, the flight controller, the rate gyros, the inverter and the BTL Ledex switch.

Hydro-Mechanical Equipment

Hydro-mechanical equipment provides the motive power for gimbaling the engines in response to commands from the flight controller. During preflight checkout and launch, a ground system brings hydraulic pressures up to in-flight levels, and allows checkout of the control system. In flight, hydraulic pressures are maintained by a pump powered by the gas generator.

In-Flight Hydraulics

The hydraulic pump and the hydraulic accessory unit, which includes a reservoir and accumulator system, maintain the in-flight hydraulic supply at a pressure of 3,000 psia for the demands of the engine actuators. Control equipment includes two main hydraulic actuator assemblies, two vernier pitch/roll actuator assemblies and two yaw actuator assemblies. The major components of the actuators are the servo valve, the cylinder assembly, and the position feedback potentiometer The servo valve regulates the rate of hydraulic fluid on the basis of electrical signals from the flight controller; thus the length of travel in the cylinders is regulated, and the cylinder travel determines engine positions.


Instrumentation Equipment


The standard booster instrumentation kit, model DM-2102-1, is a complete system for measuring and transmitting performance data for the booster. The measuring instruments--pressure transducers, thermocouples, a tachometer, position indicators, propellant float switch assemblies, and various resistance networks--are similar to those installed in previous configurations.

Destruct System

The range safety system, government-furnished equipment, is installed in duplicate in each booster. Each range safety kit includes one receiver, two antennas, a safety and arming (S&A) mechanism, and sufficient primacord (installed in the tunnel along both propellant tanks) to destroy the vehicle. Each kit is powered by an independent battery source. Before would activate the destruct system and destroy both stages of the vehicle. The system is described in detail in Douglas report SM-37963, IM-21 Range Safety System, dated November, 1960.





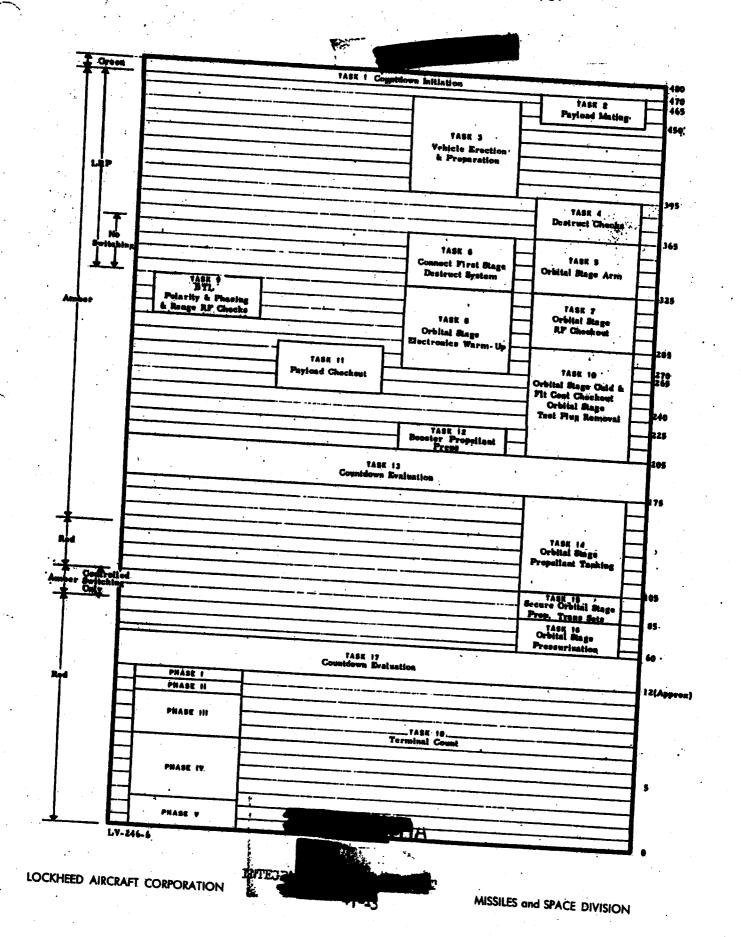



TAB 48

IMSC 445925-D **TAB 48** 1411/372 1 April 1963

PROGRAM 162 LAUNCH TEST DIRECTIVE (U)

for PROGRAM 162 VEHICLE 1411/372 (U)

Contract AF 04 (695)-233

APPROVED:

E. Gaiser, Manager

Launch Systems Engineering, VAFB Lockheed Missiles & Space Company Senior LMSC Member

Launch Test Working Group

APPROVED:

S. M. Abeles

Douglas Project Engineer, VAFB

Douglas Aircraft Company

Senior DAC Member

Launch Test Working Group

APPROVED:

Birector

Vandenberg Field Station

Bell Telephone Laboratories, Incorporated

L. A. Perry, Jr., Colonel Usar Deputy Commander Space Launches

6595th Aerospace Test Wing (AFSC)

LOCKHEED AIRCRAFT CORPORATION Missiles and Space Company Vandenberg Air Force Base, California

DOWNGRADED AT 3 YEAR INTERVALS: DECLASSIFIED AFTER 12 YEARS DOD DIR 5200:10


This document contains information affecting the national defense of the United States within the meaning of the espionage laws, Title 18 U.S.C., Sec. 793 and 794. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

Distribution: LMSC 223616-4

63-1342

LOCKHEED AIRCRAFT CORPORATION

MISSILES and SPACE DIVISION



LMSC 445925-D TAB 48 1411/372

TAB 48

CONTENTS

| 1. | Introduction | Page |
|--------|--|------|
| 2. | Flight Test Information | 48-1 |
| 3. | Booster 372 Flight Plan | 48-2 |
| 4. | RF Monitor List | 48-3 |
| 5. | | 48-4 |
| 6. | Satellite Vehicle Landline Instrumentation Schedule Booster Landline Trategies | 48-5 |
| 7• | Booster Landline Instrumentation Schedule Booster Telemetry Schedule | 48-6 |
| 8. | | 48-7 |
| 9. | Booster Magnetic Tape Track Assignments Weather Conditions | 48-8 |
| 270118 | | 48-9 |

6595TH TW _



OF

CYS





LMSC 445925-D TAB 48 1411/372

INTRODUCTION

This tab covers the launch of S-OlA Satellite Vehicle 1411 mated to SLV-2 Booster 372. It is to be used with Program 162 Launch Test Directive, IMSC 445925-D and should be inserted in the back of that publication.

Since the basic LTD is devoted primarily to SLV-2A/OlA vehicles, portions of the following items will differ for this launch:

> Vehicle Configuration Booster Pad Checks Countdown Chart Optical Coverage Weather Conditions

Section 4 Item 5.7 Figure 6.2 Section 8 Item 7.8

Reference to solid motor fit checks, 5.7 of the basic LATD, should be disregarded. Information on weather conditions is set forth on a separate

Booster configuration included in Tab 47 applies to Booster 372, also.

Countdown tasks will be assigned the same times as for the 1160/376 launch, Tab 47, with the exception that time of Task 3, Vehicle Erection and Preparation, will be lengthened to 90 minutes and overall count to 500 minutes.


Tables 8-1 and 8-2 of the basic LTD will be used for engineering sequential and documentary optics coverage, respectively, with the exception that any reference to solid motors will be disregarded. Also camera location for Item 11.7 has been changed from "M" to "B". Camera position diagram for each pad is included in revision to the basic LTD soon to be issued.

The following IMSC documents are applicable to S-OlA vehicle 1411:

Vehicle Test Plan - 1357403 Telemetry Instrumentation Schedule - 1357200



LOCKHEED AIRCRAFT CORPORATION



IMSC 445925-D TAB 48 1411/372

FLIGHT TEST INFORMATION

Booster Satellite Vehicle Launch Pad Pad Azimuth Launch Azimuth Primary Flight Mission (1):

SIV-2 serial 372 S-OlA serial 1411 75-1, Pad 1 259.5 deg 172 deg

Perigee Orbit inclination angle Period Gross lift-off weight

165 nm 81.8 deg 90.6 min 123,448 lbs

Alternate flight mission (2):

Perigee Orbit inclination angle Period Gross lift-off weight


113 mm 81.8 deg 90.9 min 123,762 lbs

Scheduled Launch Date Launch Window

22 April 1963 To be announced

(1) Reference IMSC A094529-5. This mission will be used unless further notice is given.

- (2) Reference LMSC A094529-7.
- (3) Weight based on information available at time of preparation. May vary slightly at launch.



FLIGHT PLAN BOOSTER 372

Two seconds after liftoff, the booster will begin a 6.731 deg/sec roll program. At T+15 seconds, the booster will have completed the initial roll program. The roll program is about a vertical axis from the indicated pad azimuth to the pitch phase azimuth of 172 degrees true. Positive roll is clockwise rotation as viewed from the rear of the booster.

T+17 to burnout - The booster will execute the following pitch program:

| Time (sec) | Pitch Rate (deg/sec) |
|--|---|
| 0 to 17 17 to 35 35 to 70 70 to 90 90 to 130 130 to burnout | 0 -0.80121 -0.60206 -0.50868 -0.25028 |


No year rate will be programmed for the primary mission. The flight controller will execute the following timed events:

| Time (sec) | Event | |
|------------------------|--|-------------|
| T+90 T+110 T+138 | BTL guidance syn Gain change MECO enable | stem enable |

MECO will be executed at T+147 (+5) seconds as the result of propellant depletion, or guidance command.

VECO will be executed 9.0 (+ 0.9) seconds after MECO.





R. F. MONITOR LIST

SATELLITE VEHICLE

EQUIPMENT

| Vehicle Link I |
|--------------------------------|
| Vehicle Link II |
| Acquisition Beacon |
| Capsule Beacon and Drop Marker |
| VERIORT Receiver |
| VERIORT Transmitter |
| Auxiliary Command System |

CODE

T-60 T-59 T-25 T-65 S-30 D S-68 P

V-89

48-4





MISSILES and SPACE DIVISION Batt Voltage

SCHEDULE - S-OLA VEHICLE 1411

| | SCHEDUL | e - 8-014 veh | ICLE 1411 | |
|---------------------------------------|------------------|---------------|----------------|---------------------------|
| 7/11/20 | | | | |
| RECORDER 1 | | | RECORDER 2 | |
| Channel | _ | | THOOTHER S | |
| | Function | | Channel | Domand and |
| 1 | Gas Valve 1 | | | Function |
| 2 | Gas Valve 2 | | 1 | AP 10 |
| 3 4 | Gas Valve 3 | | . 2 | Spare |
| 4 | Gas Valve 4 | • | 3 4 | AP 9 |
| 5 6 | Gas Valve 5 | | | Spare |
| 6 | Gas Valve 6 | 4.0 | 5 6 | AP 12 |
| 7 8 | Roll Gyro Temp | · | | AP 18 |
| 8 . | Yaw Gyro Temp | | 7 | Spare |
| | - Was well | • | Ö | P/L Skin Temp |
| RECORDER 3 | • | | - | |
| | | | RECORDER 4 | |
| Channel | Function | | | |
| 1 | | | Channel | <u>Function</u> |
| | Helium Line Pr | ess | 1 | |
| 2 3 4 5 6 | Guidance Gas L | ine Press | 2 | Spare |
| Ĭ, | Spare | | 3 | Spare |
| T | UDMH Sniffer | | | No Sphere Temp |
| , | IRFNA Sniffer | • | 4 | High Scale |
| 7 | Spare | | • | No Sphere Temp |
| 7 8 | Accelerometer ! | Femp | 5 | Low Scale |
| O | Oven Temp | | | He Sphere Temp |
| RECORDER D-1 | | | 6 | Low Scale |
| VERNAMER D-T | • | | | He Sphere Temp |
| Manna? | | | 7 1 | High Scale |
| Channel | Function | | 8 | Ox Vent Press |
| 1 | Pitch Servo | | | Fuel Vent Press |
| 2 | Yaw Servo | | D O DECORDO | _ |
| 3. | Pitch Actuator | | D-2 RECORDE | R . |
| 3 4 5 6 | Yaw Actuator | | Manna? | |
| 5 | E/S Pitch | | <u>Channel</u> | Function |
| 6 | H/S Roll | | <u>.</u> | Pitch Gyro |
| | n o wort | | 2 3 4 | Yaw Gyro |
| RECORDER 13 | | | 3 | Roll Gyro |
| Channel * | _ | | .# | GV 1-6 |
| | Event | • | 2 | Counter Warning |
| ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ | Helium Valve Clo | oseđ | 6 | Velocity Number |
| 25 26 27 28 29 30 | . Iner AGUL | | | Readout |
| 28 . | Ox Vent Umbilic | al Conn. | TOD | |
| 20 . 20 | Umbilical Drop | | LOB CEC RECO | RDER |
| 29 | DACO Lift Off | | Channel | Function |
| 30 | Time Pulse | | 7 | |
| | | | 8 | Battery Current |
| | | | | Single Phase Power Supply |
| 1 to 24 | Spares | | 11 | TIME MITSE |
| • | · | | 12* | 115 V, 400 cps, ØAB |
| | | | TO. | -26 VDC Reg |
| | | | EX. | +28 VDC Reg |
| | | 7 | ET PAL | 115 V. 400 cps. 6Pc |
| | | 100 Mar. | σς:·· | +26 VDC, Ext Pwr Supply |
| | | | 26 | |
| CKHEED AIRCRAFT CO | RPORATION - | 14 | ALL Other ch | annels are spares |
| | | | WISS WISS | ILES and SPACE DIVISION |
| | | * | 14 | |



BOOSTER LANDLINE INSTRUMENTATION SCHEDULE

| Function | Range | Nominal Values |
|---|--------------|-----------------------|
| Main liquid oxygen tank pressure | 0-50 psig | 22 |
| Main fuel tank pressure | 0-50 psig | 33 paig |
| Nitrogen storage tank bottle pressure | 0-8,000 paig | 28 psig 6,000 psig |
| High-pressure missile bottle pressure | 0-5,000 psig | 3,000 psig |
| Vernier fuel start tank pressure | 0-1,000 psig | 646 psig |
| Vernier liquid oxygen start tank pressure | 0-1,000 psig | 646 psig |
| Engine regulator discharge pressure | 0-800 psig | 646 psig |
| Liquid oxygen storage tank pressure | 0-150 psig | 71 paig |
| Fuel storage tank pressure | 0-150 psig | 53 psig |
| Control manifold pressure | 0-200 psig | 135 paig |
| Transducer 5-volt supply Hydraulic return pressure | 0-10 volts | 5 volts |
| Toottu pressure | 0-200 psig | 80 psig |



| BOOSTER | THE CONTRACTOR OF THE CONTRACT | -to Talenta |
|---------|--|-------------|
| | THE SERVE INSTRUMENTATION | SCHEDIT.R |


| M/M Channel | Center Frequency | Function | |
|------------------|---------------------|---|---|
| 8 | 3.0 | | Range |
| 9 | 3.9 | Vernier engine No. 2 chamber pressure | 0 4 |
| 10 | 5.4 | | |
| 11 | 7.35 | Main engine chember | 0 to 5 volts |
| | 1.35 | requesting No. 1: file! & low every | 0 to 800 psis |
| 12 | 10.5 | | |
| 2 | 70.0 | Magnetron current / Tout \ | 0 to 5 volts |
| | 10.0 | PIM/FM/FM | 0 to 100% See below |
| DM/FM Dannel | | | pec petton |
| | | Function | Range |
| 1 | 5-volt at | Solute | verifie |
| 2 | Instrumer | Itation ground | 0 to 5 volts |
| 3 4 | Merry 6D61 | De Ditch market | 0 to 5 volts |
| 4 | I SWITH GIRK! | DE VEV postala | ± 2 degrees |
| 5 | AATHTAL 6 | DØIDE No 7 mat . | + 2 degrees |
| 0 | | | + 20 degrees |
| 7 | | | 0 to -20 deg |
| 8 | | | + 20 degrees |
| 9 & 31 | | | 0 to +20 dec |
| 10 4 32 | Yaw attit | ide error | + 4 degree |
| 11 & 33 | Roll atti | tude error | + 4 degrees |
| 12 & 34 | Pitch rate | | + 4 40 |
| 13 & 35 | | | • D Aaa/ |
| 14 # 36 | | | ± 2 deg/sec |
| 5 & 37 6 & 38 | | nend. | † 2 deg/sec † 8 deg/sec † 3.5 deg/sec |
| .7 | Yaw commer | id. | ± 3.5 deg/sec |
| B | Actuator p | otentiometer positive | T 3.7 (88/444 |
| \tilde{g} | I was accessfort. D | DURNES CHARLES TO THE STATE OF | O to 30 volts |
| Ď. | I JAA-CHE AU | LITERTON WASHING A F | -13 to -30 volte |
| i | NAOTE BOF | entiometer excitation | 110 to 120 volts |
| 2 | - AND APPLIED OF C | KALIN CANTOLI (1980) | 0 to 5 volts |
| | HAMPUL BUDD | IV Woltens (nov) | 0 to -90 dbm |
| 3 4 | NATIONAL DEL | CTASSE was last | 20 to 36 volts |
| 5 | Profession 34 | battery voltage | 0 to 32 volts |
| 5 | | | 0 to 32 volts |
| 7 | Turbopump | return pressure | 0 to 4,000 psia |
| 3 | Turbine int | pesu | 0 to 200 psia |
|) | Fuel remy 4 | let temperature | 0 to 8,000 rpm |
| | Spare | nlet pressure | 0 to 1,500 deg F 0 to 200 psia |
|) ' | | let pressure | - vo Eco Dalg |
|) [| Main fuel + | ank top pressure | 0 to 100 psia |
| . | Gas generat | Or low in tooks | 0 to 100 psia |
| 1 | Main lor to | or lox injection pressure nk top pressure | 0 to 800 psia |
| | | let temperature | 0 to 100 psia |
| 1 | Framing 81g | DB IT | -275 to -300 deg 1 |
| _ | Framing sign | nal: | 0 to 5 volts |
| | | | 0 to 5 volts |




MAGNETIC TAPE TRACK ASSIGNMENTS (PDM)

| Track | Assignment | Type |
|-------|---|--------------|
| 1 | Pulse-duration modulation (70 KC) | Pulse Record |
| 8 | Agena telemetry receiver No. 1; 100-KC wow & flutter | Direct |
| 3 | Thor telemetry receiver No. 2; 100-KC wow & flutter | Direct |
| 4 | 60 CP8, 17-KC speedlock AGC No. 1 (5.4 KC) AGC No. 2 (7.35 KC) AGC No. 3 (10.5 KC) Liftoff signal (22 KC) Voice (30 KC) | Direct |
| 5 | Thor telemetry receiver No. 3; 100-KC wow & flutter | Direct |
| 6 | 100-PPS, 17-bit binary-coded timing, modulated on 1 KC | Direct |
| 7 | 1-PPS, 17-bit binary-coded timing, modulated on 1 KC | Direct |

Recording Speed (All Tracks): 60 IPS





143C 445924-D TAB 48 1411/372

WEATHER CONDITIONS

General Information

Since there are no solid motors attached to Booster 372, the weather restrictions for launch will be similar to those established for previous program 162 launches in lieu of those set forth in 7.8 of the basic IMD. The latter applies specifically to SIN-2A launches.

Visibility

Visibility requirements set forth in paragraph 7.8.1 of the basic LTD, which provides for optical coverage of booster in flight, should be disregarded. There are no visibility restrictions for this launch.


Wind Restrictions

Upper wind conditions derived from PMR soundings are reviewed at IMSC, Sunnyvale for wind shear conditions as set forth in the basic IMD. Other elements of upper weather will not normally affect a launch schedule.

Surface weather conditions, except for wind velocity, will not normally affect a launch schedule. The space systems's maximum wind tolerance, 50 knots, is limited by the characteristics of the umbilical mast.

Before fueling and pressurization have been completed, the following surface wind restrictions (in knots) are applicable:

| Fuel Load | Toppling Condition | Launcher Pins In | Pins In and Clamshells Closed |
|-------------------|-----------------------|---------------------|----------------------------------|
| Vehicle empty | 17 | 50 | 50 |
| 8-01A only loaded | 27 | 50 | 50 |
| Vehicle loaded | 45 | 45 | 50 |





TAB 49

PROGRAM 162 LAUNCH TEST DIRECTIVE

(U)

for PROGRAM 162 VEHICLE 1161/362

(U) Contract AF 04(695)-233

APPROVED:

F. E. Gaiser, Manager

Launch Systems Engineering, VAFB Lockheed Missiles & Space Company

Senior LMSC Member

Launch Test Working Group

APPROVED:

S. M. Abeles

Douglas Project Engineer, VAFB

Douglas Aircraft Company

Senior DAC Member

Launch Test Working Group

APPROVED:

APPROVED:

Vandenberg Fre d Station

Bell Telephone Laboratories, Incorporated

Perry, Jr., Colonel, USAF Deputy Commander Space Launches

6595th Aerospace Test Wing (AFSC)

LOCKHEED AIRCRAFT CORPORATION Missiles and Space Company Vandenberg Air Force Base, California

DOWNGRADED AT 3 YEAR INTERVALS: DECLASSIFIED AFTER 12 YEARS DOD DIR 5200:10

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18 U.S.C., Sec. 793 and 794. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

Distribution: IMSC 223616-4

63-1821


6595TH TW

OF

CYS

LOCKHEED AIRCRAFT CORPORATION

MISSILES and SPACE DIVISION



CONTENTS - TAB 49


| 1. | | Page |
|----|--|---------|
| ±• | Introduction | 49-1 |
| 2. | Flight Test Information | 49-3 |
| 3. | Flight Plan and Timed Events | |
| 4. | | 49-4 |
| | S-Ola Landline Instrumentation Schedule | 49-5 |
| 5• | Booster Landline Instrumentation Schedule | 49-7 |
| 6. | Booster Telemetry Instrumentation Schedule | 49-9 |
| 7• | PMR Magnetic Tape Track Assignments | |
| 8. | | 49-13 |
| _ | VT6 Magnetic Tape Track Assignments | . 49-14 |
| 9• | RF Monitor List | 49-15 |
| | | |

63 - 1821

49-1 6595TH TW

ÒF

CYS



INTRODUCTION

This Tab applies to Program 162 Launch Test Directive, LMSC 445925-D, and should be inserted in the back of that publication. It covers launch preparation and launch of 8-OlA satellite vehicle 1161 mated to SIW-2A booster 362. The vehicle is scheduled to launch from VAFB Complex 75-3, Pad 4.

The BTL missile-borne guidance system will be installed in the S-OlA satellite vehicle. Commands to the booster will be routed through the SIV-2A/S-OlA BTL interface plug. The guidance phase will continue after separation and will terminate at about T + 450 seconds.

Recovery of one of the three solid booster motors is desired, if it is floating.

The Pad 4 camera location diagram, page 46-14 of TAB 46, should be used with optical data requirements in lieu of the figure contained in the basic LITD. Also, Documentary Photographic Requirements, page 46-13 of TAB 46, should be used.

Surface Wind Limitations, SLW-2A/S-OlA Vehicles


The following surface wind restrictions supersede those set forth in paragraph 7.8.3 of the basic LTD: A launch will not be attempted when the wind velocity at the launch site exceeds 40 knots from any direction, or when the wind velocity exceeds 30 knots from the critical sector. The critical wind sector for Pad 4 is 000 to 135 degrees.

Surface wind will restrict all activity at the launch pad requiring the vehicle to be erected. The standard SLV-2A/S-OlA may not be erected when surface winds, including gusts, exceed the following limits (in knots):

| Configuration | Toppling Condition | Launcher Pins In |
|--|----------------------------|----------------------------|
| Vehicle empty without solid motors Vehicle empty with solid motors attached S-OlA only loaded with solid motors attached Vehicle loaded with solid motors attached Vehicle loaded and pressurized with solid motors attached | 16 32 37 37 63 | 46 46 41 37 64 |

Visibility Requirements

In order to track the booster and solid motors as set forth under Booster Photographic Data, sufficient visibility to enable tracking cameras to follow the flight of the vehicle until solid motor jettisons and descent is required.






Booster Photographic Data

Engineering Sequential

Two prints of all engineering photography are required for this launch and for specific subsequent launches. The two sets of prints are due for delivery to DAC/VAFB by T + 25 hours. One set of prints will be forwarded immediately to DAC, Senta Monica.

Special Photography

Special tracking film will be required for this launch and for specified subsequent launches. DAC has ordered this film through the LUWG. The photography should include 6 inch resolution in tracking the solid motors through their ejection, ballistic trajectory, and impact.






FLIGHT TEST INFORMATION

IMSC 445925-D TAB 49 1161/362

| Booster | |
|---------------------------|--------------------|
| Satellite Vehicle | SLV-2A 362 |
| Launch Pad | 8-01A 1161 |
| Pad Azimuth | Complex 75-3 Pad 4 |
| Launch Azimuth | 181.5 deg |
| Perigee Altitude | 175 deg |
| Perigee Latitude | 110 nm |
| Orbit Inclination Angle | 30 deg N |
| Period | 81.8 deg |
| Gross Liftoff Weight (1) | 90.9 min |
| Gross HIL COLL MAISUR (T) | 152,986 lbs |

(1) Best information available as of 4/22/63. Payload changes under consideration may vary this weight.




FLIGHT PLAN - BOOSTER 362


The flight control program for the primary trajectory is:

| Time (sec) | Roll | Pitch | Yaw |
|------------------|------------|---------------------|----------|
| 0 to 2 | 0 | . 0 | • |
| 2 to 3.667 | +4.173 | Ŏ | O |
| 3.667 to 4 | 0 | . 0 | 0 |
| 4 to 9.667 | Ŏ | -2.681 | 0 |
| 9.667 to 10 | Ŏ. | -2.001· | 0 |
| 10 to 54.667 | Ŏ | -0.689 | 0 |
| 54.667 to 55 | 0 | _ | . 0 |
| 55 to 79.667 | 0 | 0 | 0 |
| 79.667 to 80 | Ŏ | -0.511 | . 0 |
| 80 to 82.760 | Ŏ | 0 | 0 |
| 82.760 to 83.093 | 0 | -0. 21 2 | -0.833 |
| 83.093 to 170 | . 0 | 0 🙀 | 0 |
| 03.093 10 110 | O , | -0.212 | 0 |

The flight control system will be arranged for the following plan of events:

| Time | Timed Event |
|-------------|--|
| T + 55 sec | Enable separation circuitry (solid motor) |
| T + 70 sec | Solid motor separation; roll gain change |
| T + 80 sec | Solid motor separation backup signal; Guidance enable |
| T + 102 sec | Enable vernier engine yew movement; Main engine gain change |
| T + 138 sec | MECO enable |





LANDLINE INSTRUMENTATION SCHEDULE


S-OLA VEHICLE 1161

RECORDER NO. 1

| | runction |
|--|---|
| 1 2 3 4 5 6 7 8 | Guidance Gas Fill Line Drop He High Press. Fill Line Drop Fuel Fill Line Drop Acid Fill Line Drop Air Cond. Line Drop P/L Blanket Drop |
| | |
| | RECORDER NO. 2 |
| i | AP18 |
| 2 | AP12 |
| 3 | AP 8 |
| . 4 | APLO |
| 6 | AP 2 |
| 1 2 3 4 5 6 7 8 | AP 9 |
| 8 | AP 3 Lift-Off |
| | RECORDER NO. 3 |
| 1 | He Sphere Temp. |
| 2 : | He Sphere Temp. |
| 3 | N2 Sphere Temp. |
| 4 | No Sphere Temp. |
| 5 | L/B Mode and Event |
| 0 7 | He Line Press. |
| 1 2 3 4 5 6 7 8 | Guidance Gas Line Press. Lift-Off |
| · | RECORDER NO: 4 |
| 1 | Oxid Vent Line Press. |
| 2 | Fuel Vent Line Press |
| ž | OWIN AGUE (MIDILICA) COMPANY |
| 4 5 6 | FUCT VENT Umbiling Connect |
| 6 | I/L Skin Te |
| 7 8 | Oxid Sniff |
| | Fuel Sniffe, Lift-off |
| 1 Communication of the Communi | |
| LOCKHEED AIRCRAFT CORPORATION | |

Function

Channel




LANDLINE INSTRUMENTATION SCHEDULE (Cont'd)


S-OLA VEHICLE 1161

| | RECORDER NO. 5 |
|--------------------------------------|--|
| Channel. | Function |
| 1 3 4 5 6 7 8 | +28VDC Reg28 VDC Reg. Batt. Curr. +28VDC Type X -28 VDC Unreg bus +28 VDC Unreg bus +28 VDC Pyro bus Lift-Off |
| | RECORDER NO. 6 |
| 1 2 3 4 5 6 7 8 | Gas Valve 1 Gas Valve 2 Gas Valve 3 Gas Valve 4 Gas Valve 5 Gas Valve 6 Yaw Gyro Temp. Roll Gyro Temp. |
| 1 2 3 4 5 6 7 8 | RECORDER NO. D1 Pitch Servo Cmmd. Yaw Servo Cmmd. Pitch Hyd. Input Yaw Hyd. Input Pitch Actuator Yaw Actuator V/M Acc. Temp. F/M Oven Temp. |

RECORDER NO. D2

| Pitch Gyro Out |
|-----------------|
| Yaw Gyro Out |
| Roll Gyro Out |
| Gas Valves 1-6 |
| H/S Pitch |
| H/8 Roll |
| Counter Warning |
| V/M Readout |
| |





BOOSTER LANDLINE INSTRUMENTATION

GROUND MONITOR SYSTEM


| FUNCTION | RANCE | NOMINAL VALUES |
|---|--------------|-------------------|
| Main liquid oxygen tank pressure | 0-50 psig | 33 psis |
| Main fuel tank pressure | 0-50 psig | 28 psig |
| Mitrogen storage tank bottle pressure | 0-8,000 psig | 6,000 psig |
| High-pressure missile bottle pressure | 0-5,000 psig | 3,000 psig |
| Vernier fuel start tank pressure | 0-1,000 psig | 646 paig |
| Vernier liquid oxygen start tank pressure | 0-1,000 psig | 646 paig |
| Engine regulator discharge pressure | 0-800 psig | 646 psig |
| Liquid oxygen storage tank pressure | 0-150 psig | 71 paig |
| Fuel storage tank pressure | 0-150 psig | 53 paig |
| Control manifold pressure | 0-200 psig | 135 psig |
| Fransducer 5-volt supply | 0-10 volts | 5 volts |
| lydraulic return pressure | 0-200 psig | 80 psig |





EVENTS RECORDER CHANNEL ASSTORMENTS

| CHANNEL | EVENT | |
|----------------------------|--|----------|
| | | |
| . 1 | Base timing | • |
| . 2 | Power on (sequence initiation) | |
| 3 | russe completion (resets systematically) | • |
| 4 | | |
| 3 4 5 6 7 8 | Fuel storage tank went water alone | |
| 6 | Control manifold pressurizing valve open | |
| 7 | Missile bottles pressurizing valve open | • |
| | Lox storage tank vent valve closed | •• |
| 9 | Lox storage tank pressurizing valve open | |
| 10 | Rydraulics normal | |
| 11 | Engine centered | • |
| 12 | Engine off center | |
| 13 14 | Engine recentered | |
| | Leuncher hydraulics normal | |
| · 15 | Missile bottles pressurized | ~ |
| 16 | Engine purge on | • |
| 17 | Main fred death and | |
| 18 | Main fuel tank vent valve open | |
| 19 | Fuel storage tank pressurizing valve open | • |
| 20 | Tant time Tord Astas Open | |
| 21. | Lox fine load valve open | |
| 22 | Lox rapid load valve open | • |
| | Fuel repid load valve open | |
| 23 24 | Main lox tank vent valve open | |
| 25 | 97% fuel | |
| 26 | 100% fuel | |
| 27 | Main fuel tank pre-pressurizing valve open | |
| 28 | but but the contract of the co | |
| | YOU LOX | • • |
| 29 | Inverter on | |
| 30 | Inverter on internal | |
| 31 32 33 34 35 | Flight controller on internal | |
| 3≥ 30 | Booster on internal novem | |
| 33 | Launcher clear to fire | |
| 34 | Lox transfer resume | |
| 35 | Main lox tenk vent valve hoost alone | • |
| 36 | Main lox tank pre-pressurizing valve open | |
| 37 38 39 40 | 99% lox | |
| 38 | 100% lox | • |
| 39 | Main propellant tanks pressurized | |
| | Propellant transfer complete | |
| 41 | Engine start | •. |
| 42 | Liftoff | |
| 42 43 44 | Technical hold imposed | • |
| 44 | Malfunction | |
| 45 | Propellant hold over-ride | |
| 46 | Elichi contaction over 1106 | |
| 47 | Flight controller and hydraulics over-ride. | • |
| 48 | | |
| 49 | "Proceeding Liftoff sign Mana | |
| 50 | mitoi sign | |




BOOSTER 362 CHANNEL ASSIGNMENTS, IN-FLIGHT TELEMETRY

FM/FM Channels, Kit No. 1

| FM/FM Channel | Center Frequency | Function | Range |
|------------------|---------------------|--|----------------|
| 7 | 2.3 | Noin and a state of | venge |
| 8 | | Main engine chamber pressure, close- coupled transducer | 0 to 800 psia |
| 9 | 3.0 | Solid motor chamber pressure, high range, solid motor No. 3 | 0 to 100 psia |
| , | 3.9 | Sequence No. 1 fuel and low elect | 0 to 5 volts |
| 10 | 5.4 | switches, MECO, VECO Solid motor chamber pressure, high range, | |
| 11 | 7-35 | -a-ra morot. No. 4 | 0 to 800 psia |
| 15 | 10.5 | Vibration, yaw axis, solid motor attach Vibration, yaw axis, transition section | + 3 g + 3 g |
| 13 | 14.5 | Vibration, pitch axis, transition | |
| A . | 22.0 | section (ruel tank dome) | ± 3 g |
| c | 40.0 | Vibration, yaw axis, transition section, flight controller | <u>+</u> 30 g |
| | | Vibration, transition section, longitudinal axis, flight controller | ± 30 g |
| B | 70.0 | Subcommutated to 45 PDM channels | See page 49. |

FM/FM Channels, Kit No. 2

| FM/FM Channel | Center Frequency | Function | Paner |
|------------------|---------------------|---|----------------|
| 7 | 2.3 | Seminar Va | Range |
| ` | 5 | Sequence No. 3: solid motor removals, No. 1, No. 2, No. 3 | 0 to 5 volts |
| 8 | 3.0 | Seguence No. 2: 4 | |
| | | Sequence No. 2: ignition switches 1 & 2 pickup, separation signals (primary & backup) | 0 to 5 volts |
| 9 | 3.9 5.4 | Vehicle axial acceleration | |
| 10 | 5.4 | Solid motor chamber pressure, low | 0 to 8 g |
| } | j. | range, solid motor No. 2 | 0 to 100 psia |
| 11 | 7-35 | Solid motor chamber pressure, high | |
| | İ | range, solid motor No. 1 | 0 to 800 psia |
| 12 | 10.5 | Vibration, yay axis, center conten | |
| | | (lox tank dome) | ± 12 g |
| 13 | 14.5 | Vibration, pitch axis, center section | |
| . 1 | | (LUX TELIK COME) | ±3 g |
| A | 22.0 | Solid motor chamber pressure, high | |
| _ | | range, solid motor No. 2 | 0 to 800 psia |
| C | 40.0 | Subcommutated | _ |
| E | 70.0 | Vibration en | See page 49. |
| | | axis | <u>+</u> 300 g |



BOOSTER 362 PDM Channel Assignments, Kit No. 1

| Channel | Function | Range |
|-----------|--|--------------------|
| 1 | 5-volt absolute | ange |
| 2 | Instrumentation ground | 0 to 5 volts |
| 3 4 | Main engine pitch position | 0 to 5 volts |
| | Main engine yaw position | + 2 degrees |
| 5 6 | Vernier engine We 1 | + 2 degrees |
| 6 | Vernier engine No. 1 pitch position | ± 45 degrees |
| 7 | Vernier engine No. 1 yaw position | -8 to -28 deg |
| 8 & 30 | Vernier engine No. 2 pitch position | + 45 degrees |
| & 31 | Vernier engine No. 2 yaw position Pitch attitude error | +8 to +28 deg |
| LO & 32 | Yaw attitude error | ± 4 degrees |
| L1 & 33 | Roll attitude error | + 4 degrees |
| L2 & 34 | Pitch rate | + 6 domana |
| 3 & 35 | Yaw rate | + 1 dec/200 |
| 4 & 36 | Roll rate | + 3.5 deg/sec |
| 5 & 37 | Pitch command | |
| 6 & 38 | Yaw command | + 4 deg/sec |
| 17 | Actuation | ± 2 5 40 -/- |
| 18 | Actuator potentiometer positive voltage | + 3.5 deg/sec |
| 19 | | I V W 3U VOLTE |
| 20 | | -13 to -30 volts |
| 21 | 5-volt potentiometer excitation | 110 to 120 v |
| 25 | TOTALLEL CHAINE NO. 2 Showhan | 0 to 5 volts |
| 23 | | 0 to 500 psia |
| 23 24 | Missile Dattery voltage | 0 to 100 psia |
| 25 | I TELEMETRY Dattery works | 0 to 32 volts |
| 25 26 | Dyuraulic Supply nreceive | 0 to 32 volts |
| 27 | dyuraulic return programs | 0 to 4,000 psia |
| 28 | Turbopump speed | 0 to 200 psia |
| | Turbine inlet temperature | 0 to 8,000 rpm |
| 29 | MOT BESIGNAT | 0 to 1,500 deg F |
| & 30 | Vernier engine No. 2 yaw position | • |
| & 31 | I TYPE STUTCHE SPANS | +8 to +20 deg |
| & 32 | Roll attitude error | + 4 degrees |
| & 33 | Yaw attitude error | + 4 degrees |
| & 34 | Pitch rate | + 6 degrees |
| & 35 | Yaw rate | + 4 deg/ser |
| & 36 | Roll rate | 1 ± 3.5 deg/sec |
| & 37 | Pitch command | f O deg/sec |
| & 38 | Yaw command | 1 + 4 deg/sec |
| 39 | Not assigned: | + 3.5 deg/sec |
| Ю | Main fuel tank ton magain | |
| 1 | Gas generator lox injector pressure | 0 to 100 psia |
| 2 | Vernier engine No. 2 chamber pressure | 0 to 800 psia |
| 3 | Lox pump inlet temperature | 0 to 500 psia |
| 4 | Cyncuronization signal | -275 to -300 deg F |
| 5 | Synchronization signal | 0 to 5 volts |
| | - Andrew Print | 0 to 5 volts |

* BTU per square foot per secon LOCKHEED AIRCRAFT CORPORATION





PDM Channel Assignments, Kit No. 2


| 1 | Function | Range |
|------------|--|------------------------------|
| 2 | 5-volt absolute | |
| 3 | Instrumentation ground | 0 to 5 volts |
| 3 | DOLLA MOTOr Chamber | 0 to 5 volts |
| 4 | solid motor No. 1 | 0 to 100 psi |
| 4. | Static pressure by 7 | post. |
| 5 6 | J DUGULC Dressing DV D | 0 to 15 psia |
| 0 | CONTRACTOR DISTRICTOR | 0 to 15 psia |
| 7 8 | 1 Judicic Dressime DV_1A | 0 to 15 psia |
| |) JOSUIC Dressing DV 12 | 0 to 15 psia |
| 9 | ~vecto dressime and 10 | 0 to 15 psia |
| 10 | Post C Dressime, by 19 | 0 to 15 psia |
| 11 | Docute Dressing Dr. 1). | 0 to 15 psia |
| 12 | Docto Dreaming Dr. 15 | 0 to 15 made |
| 13 14 | Uvaulc Dreggine by 1 | 0 to 15 psia |
| | Static pressure, PX-17 | 0 to 15 psia |
| 15 | Static pressure, PX-18 | 0 to 15 psia |
| 16 | Static pressure, PX-19 | 0 to 15 psia |
| 17 | OUBLIC TIMORES THE AC | 0 to 15 psia |
| 18 | Solid motor chamber pressure, low range, solid motor No. 1 | 0 to 15 psia |
| ł | solid motor No. 1 | 0 to 15 psia |
| 19 | Static pressure, PX-1 | 0 to 100 psia |
| 20 | Static pressure, PX-1 | 104 0- |
| 21 | Static massure, PX-2 | 0 to 15 paia |
| 22 | Static pressure, PX-3 | 0 to 15 psia |
| 3 | Static pressure, PX-4 | 0 to 15 psia |
| 4 | Static pressure, PX-5 | 0 to 15 psia |
| 5 | Static pressure, PX-6 Not assigned | 0 to 15 psia |
| 6 | Bolid Motor to | 0 to 15 psia |
| 7 | Solid Motor No. 1 separation | |
| 3 [| Solid Motor No. 2 separation | 0 to 5 volts |
| | TO THE REPORT OF THE PARTY OF T | 0 to 5 volts |
| 5 | not applicated | 0 to 5 volts |
| | Not assigned | |
| | Not assigned | |
| | Not assigned | |
| ' 1 | Solid motor chamber pressure, low range, solid motor No. 1 | |
| | solid motor No. 1 | 0 to 100 psia |
| | Not assigned | |
| - 1 | Not assigned | , |
| | Not assigned | · |
| | 5-volt potentiometer excitation | |
| 1 | COO COOLENIE | 0 to 5 volts |
| - 1 | Not assigned | |
| 1 | Not assigned | |
| 1 | Heating rate sensor & m ? | |
| | | 0 to 30 BTU * |
| | | 0 to 30 BTU * |
| 1 | Synchronization | - AC 20 PIU * |
| 1. | Synchronization sign | 0 to 5 |
| | The state of Received in the second s | 0 to 5 volts 0 to 5 volts |



Channel Assignments, Kit No. 3


| PM/PM Channel | Center Frequency | Function | |
|------------------|---------------------|---|-----------------|
| 9 | 3.9 | | Range |
| 10 | | lox pump putlet pressure | 0 to 1,000 psia |
| | 5.4 | Fuel duct outlet pressure | 0 to 1,000 psia |
| 11 | 7.35 | Lox pump inlet pressure | |
| 12 . | 10.5 | Fuel pump inlet pressure | 0 to 100 psia |
| 13 | 14.5 | | 0 to 200 psia |
| A | 22.0 | Yaw acceleration, engine relay box | ± 10 g |
| | | Pitch acceleration, engine relay box | <u>+</u> 10 g |
| C | 40.0 | Longitudinal acceleration, engine relay box | -5 to +20 g |
| B | 70.0 | Axial acceleration, lox dome | ± 25 g |






PMR MAGNETIC TAPE TRACK ASSIGNMENTS


| RECORDER | TRACK | DIRECT RECORDING ASSIGNMENT (60 IPS) |
|----------|-------|--|
| 1 | 1 | 100-pps timing, AMR format D-5, modulated on 1 kg |
| 1 | \$ | SLV-2A telemetry link No. 1 primary, 100-kc wow and flutter (Tango 48) |
| 1 | 3 | SLV-2A telemetry link No. 2 primary, 100-ke wow and flutter (Tango 61) |
| 1 | ħ | 60-cps, 17-kc speedlock; AGC No. 1 (5.4 kc); AGC No. 2 (7.35 kc); AGC No. 3 (10.5 kc); AGC No. 4 (14.5 kc); liftoff signal (22 kc); voice (30 kc) |
| 1 | 5 | SIV-2A telemetry link No. 3 primary, 100-kc wow and flutter (Tango 90) |
| 1 | 6 | 80-1 telemetry link No. 2 primary, 100-ke wow and flutter |
| 1 | 7 | 1-pps timing, AMR format B-1, modulated on 1 kg. |
| 2 | 1 | 100-pps timing, AMR format D-5, modulated on lake |
| 2 | 2 | SLV-2A telemetry link No. 1 secondary, 100-kc wow and flutter |
| 2 | . 3 | SLV-2A telemetry link No. 2 secondary, 100-ke wow and flutter |
| 2 | 4 | 60-cps, 17-ke speedlock; AGC No., 1 (5.4 kg); AGC No. 2 (7.35 kg); AGC No. 3 (10.5 kg); AGC No. 4 (14.5 kg); liftoff signal (22 kg); voice (30 kg) |
| 2 | 5 | SLV-2A telemetry link No. 3 secondary, 100-kc wow and flutter |
| 2 | 6 | SO-1 telemetry link No. 2 secondary, 100-ke wow and flutter |
| 2 | 7 | 1-pps timing, AMR format B-1, modulated on 1 kc |






VTS MAGNETIC TAPE TRACK ASSIGNMENT FOR LAUNCH

| TRACK NUMBER | FUNCTION |
|-----------------|--|
| 1 | S-01A TIM Link 1 Primery Antenna |
| 2 | S-Ola TIM Link 2 Primary Antenna |
| 3 | SLV-2A TIM Link 2 Secondary Antenna |
| 4 | SLV-2A TIM Link 1 Secondary Antenna |
| 5 | Voice |
| 6 | Speed Lock 10 and 50 KC Reference Signals |
| 7 | Systems Time |
| | Signal Strength a. S-OlA TIM Link 1 b. S-OlA TIM Link 2 c. SLV-2A TIM |





R. F. MONITOR LIST

SATELLITE VEHICLE 1164

| EQUIPMENT | CODE |
|--------------------------------|--------------|
| Mud Flap | |
| Vehicle TIM | T-47 |
| Special Projects TIM | T-6 0 |
| Accordant trojects TIM | T-28 |
| Acquisition Beacon | T-25 |
| Cepsule TIM | 1-59 |
| Capsule Beacon and Drop Marker | T-65 |
| A SECTIVALITY MOCESTARY | |
| VERLORT Transmitter | 6-30D |
| Auxiliary Command Greater | 8-68P |
| Special Projects Command | v-89 |
| | V-95 |