

**CONFIDENTIAL**

5028 4 842  
*[Handwritten signature]*

**AIR FORCE SPACE MISSION  
REQUIREMENTS**

**1. RECONNAISSANCE**

**2. COMMUNICATIONS**

DOWNGRADED AT 12 YEAR  
INTERVALS; NOT AUTOMATICALLY  
DECLASSIFIED. DOD DIR 5200.10

**3. MANNED SPACE FLIGHT**

**4. TECHNICAL DEVELOPMENT AND  
EXPERIMENTAL SUPPORT**

**CONFIDENTIAL**

WD 57-05803

~~CONFIDENTIAL~~

*Copy 1*  
5027 4 841

~~SECRET~~

# VEHICLE COMBINATIONS APPLICABLE TO RECOMMENDED MISSIONS

## 1. RECONNAISSANCE - (117 L)

THOR + VANGUARD (EARLY EXPERIMENTAL FLIGHTS)  
ATLAS + YLR-81

## 2. COMMUNICATIONS

THOR + 15,000 LB. F<sub>2</sub> STAGE  
TITAN 1<sup>st</sup> STAGE + TITAN 2<sup>nd</sup> STAGE + 15,000 LB. F<sub>2</sub> STAGE  
TITAN 1<sup>st</sup> STAGE + 110,000 LB. F<sub>2</sub> + 15,000 LB. F<sub>2</sub>

## 3. MANNED SPACE FLIGHT

THOR + VANGUARD (ANIMAL EXPERIMENTS; DATA GATHERING)  
TITAN 1<sup>st</sup> STAGE + TITAN 2<sup>nd</sup> STAGE + 15,000 LB. F<sub>2</sub>  
TITAN 1<sup>st</sup> STAGE + 110,000 LB. F<sub>2</sub> + 15,000 LB. F<sub>2</sub>

## 4. TECHNICAL DEVELOPMENT & EXPERIMENTAL SUPPORT

ALL VEHICLES APPLICABLE AS DICTATED BY PAYLOAD REQUIREMENTS

~~SECRET~~

DOWNGRADED AT 12 YEAR  
INTERVALS; NOT AUTOMATICALLY  
DECLASSIFIED. DOD DIR 5200.10

~~CONFIDENTIAL~~

WD 57 05976

*Vertical handwritten notes on the right margin:*  
... 57 ...  
...  
...  
...  
...

~~CONFIDENTIAL~~

*CJET*  
5025 4 839

~~SECRET~~

## **PRIMARY VEHICLE COMBINATIONS RECOMMENDED**

1. THOR + VANGUARD 2<sup>ND</sup> STAGE + VANGUARD 3<sup>RD</sup> STAGE
2. THOR + 15,000\* F<sub>2</sub> STAGE
3. TITAN 1<sup>ST</sup> STAGE + TITAN 2<sup>ND</sup> STAGE + 15,000\* F<sub>2</sub> STAGE
4. TITAN 1<sup>ST</sup> STAGE + 110,000\* F<sub>2</sub> STAGE + 15,000\* F<sub>2</sub> STAGE
5. ATLAS + YLR-81 (PRESENT 117L)
6. NEW VEHICLE FOR SECOND GENERATION SPACE WEAPON  
(CHEMICAL OR NUCLEAR DECISION BY 1959/60)


~~CONFIDENTIAL~~

WD 57 05976

~~CONFIDENTIAL~~

Copy 1-  
5024 4 838

# BOOSTER AVAILABILITY

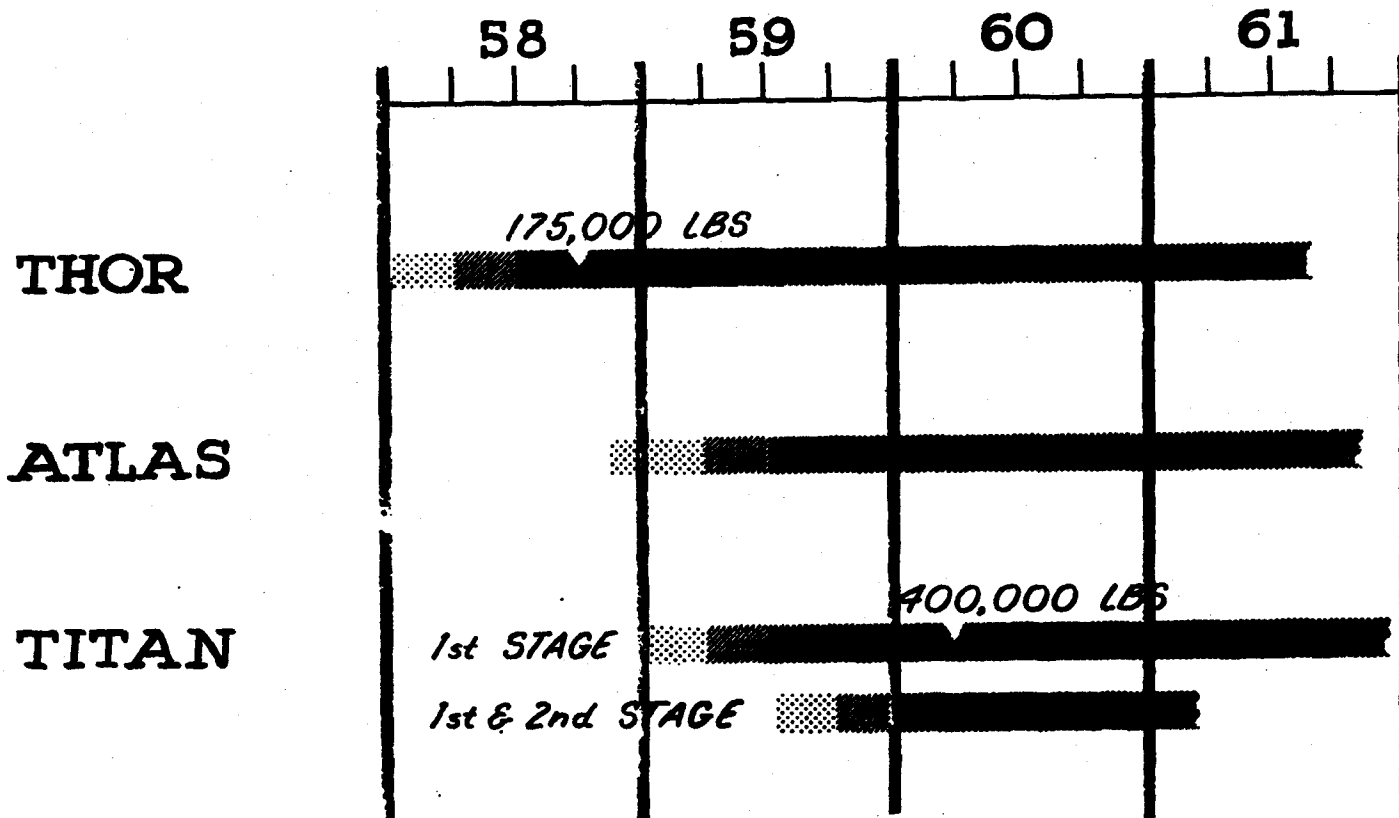

~~SECRET~~

~~CONFIDENTIAL~~


WD 57 00000

CONFIDENTIAL

Copy!  
5023 A 837

~~SECRET~~

# AVAILABILITY OF ADDED STAGES RECOMMENDED AS "BUILDING BLOCKS"

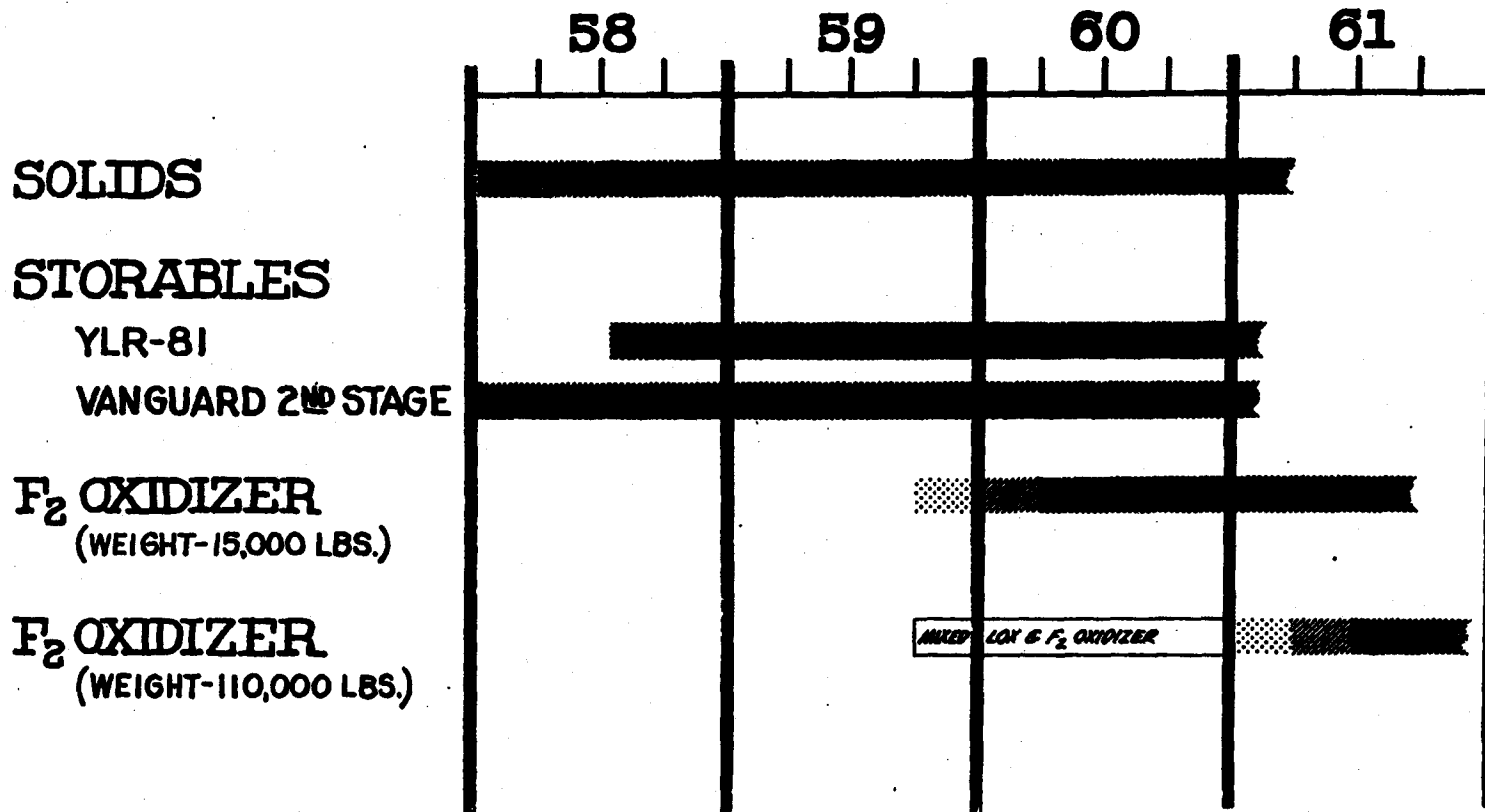

~~SECRET~~

CONFIDENTIAL

0 2 8 0 0 9 0

~~CONFIDENTIAL~~

Copy 1  
5026 4 840

~~SECRET~~

## **GENERAL CONCLUSIONS**


- 1- PRESENT ATLAS, TITAN, AND THOR PROVIDE BOOSTER CAPACITY FOR SPACE MISSIONS OF PRIMARY INTEREST FOR NEXT 10 YEARS. PRINCIPAL INVESTMENT IN FIRST GENERATION SPACE VEHICLES ALREADY MADE.**
- 2- DEVELOPMENT OF A FEW ADDED STAGES OF SMALL SIZE AS "BUILDING BLOCKS" CAN PROVIDE, IN PROPER COMBINATION WITH THE BOOSTERS, VEHICLES FOR ALL SPACE MISSIONS FOR THE NEXT 10 YEARS.**
- 3- THE GUIDANCE SYSTEMS FOR PRESENT AND SECOND GENERATION ICBM AND IRBM ARE BASICALLY ADEQUATE TO PERFORM THE SPACE MISSIONS.**
- 4- DEVELOPMENT OF "PAYLOADS" FOR SOME OF THE VARIOUS MISSIONS (INCLUDING "PAYLOADS" FOR ANIMAL AND MANNED EXPERIMENTS) CAN BE DEFINED AND INITIATED NOW.**
- 5- RESEARCH AND TECHNICAL DEVELOPMENT REQUIRED ON CRITICAL PROBLEMS AND ON BASIC SPACE PHENOMENA CAN BE DEFINED AND INITIATED NOW FOR THE SECOND GENERATION OF SPACE VEHICLES AND SPACE MISSIONS.**

~~CONFIDENTIAL~~

57 03300

CONFIDENTIAL


# EQUIVALENT VELOCITY REQUIRED FOR VARIOUS MISSIONS-FT/SEC.

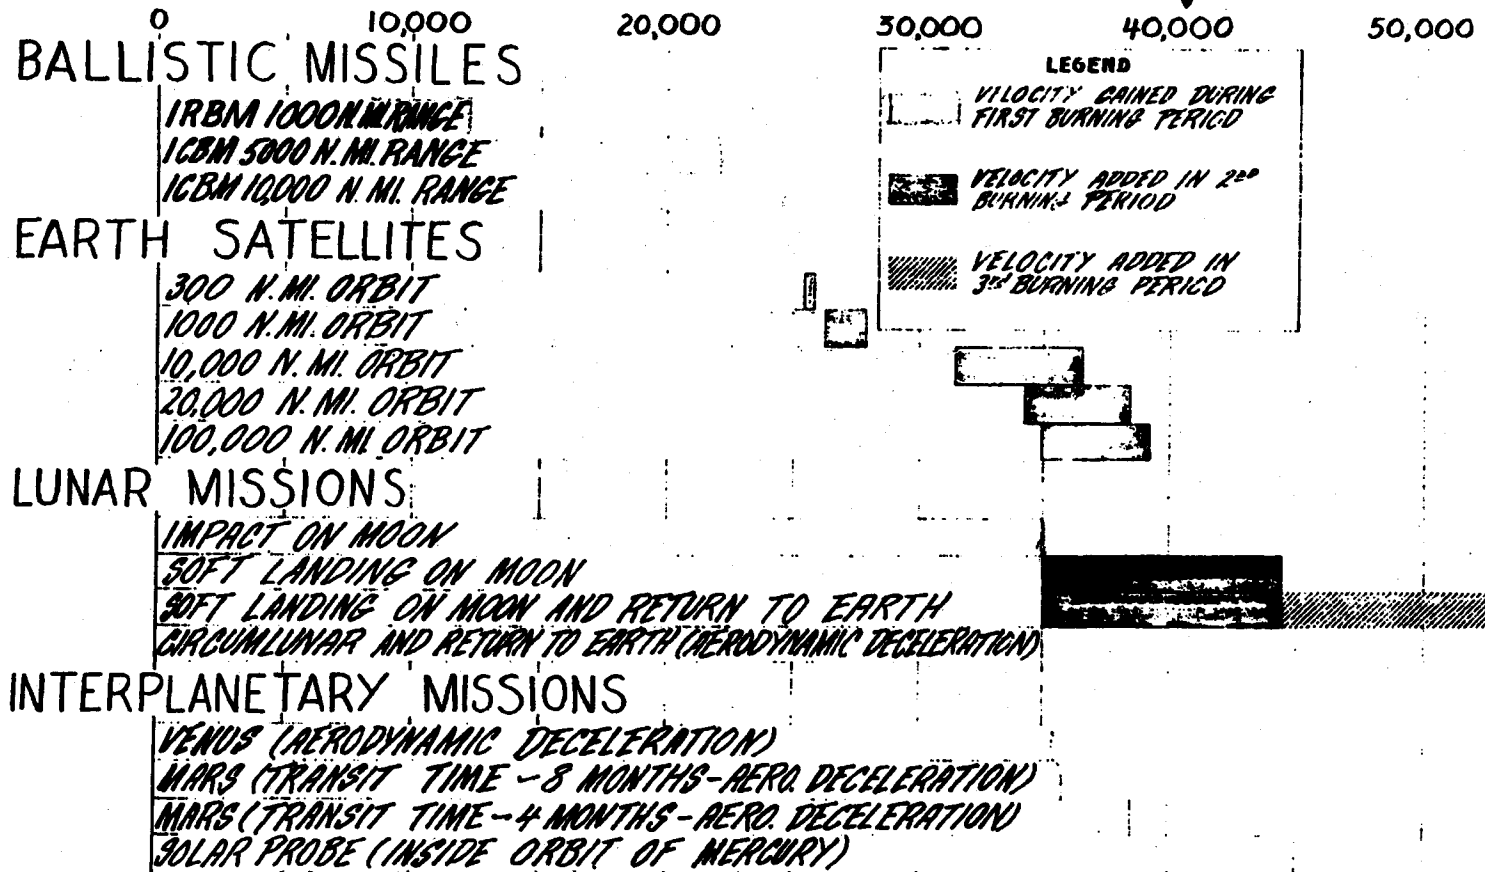

CONFIDENTIAL

~~CONFIDENTIAL~~

# THOR CAPABILITY WITH ADDED STAGES ( OF SOLID PROPELLANT )

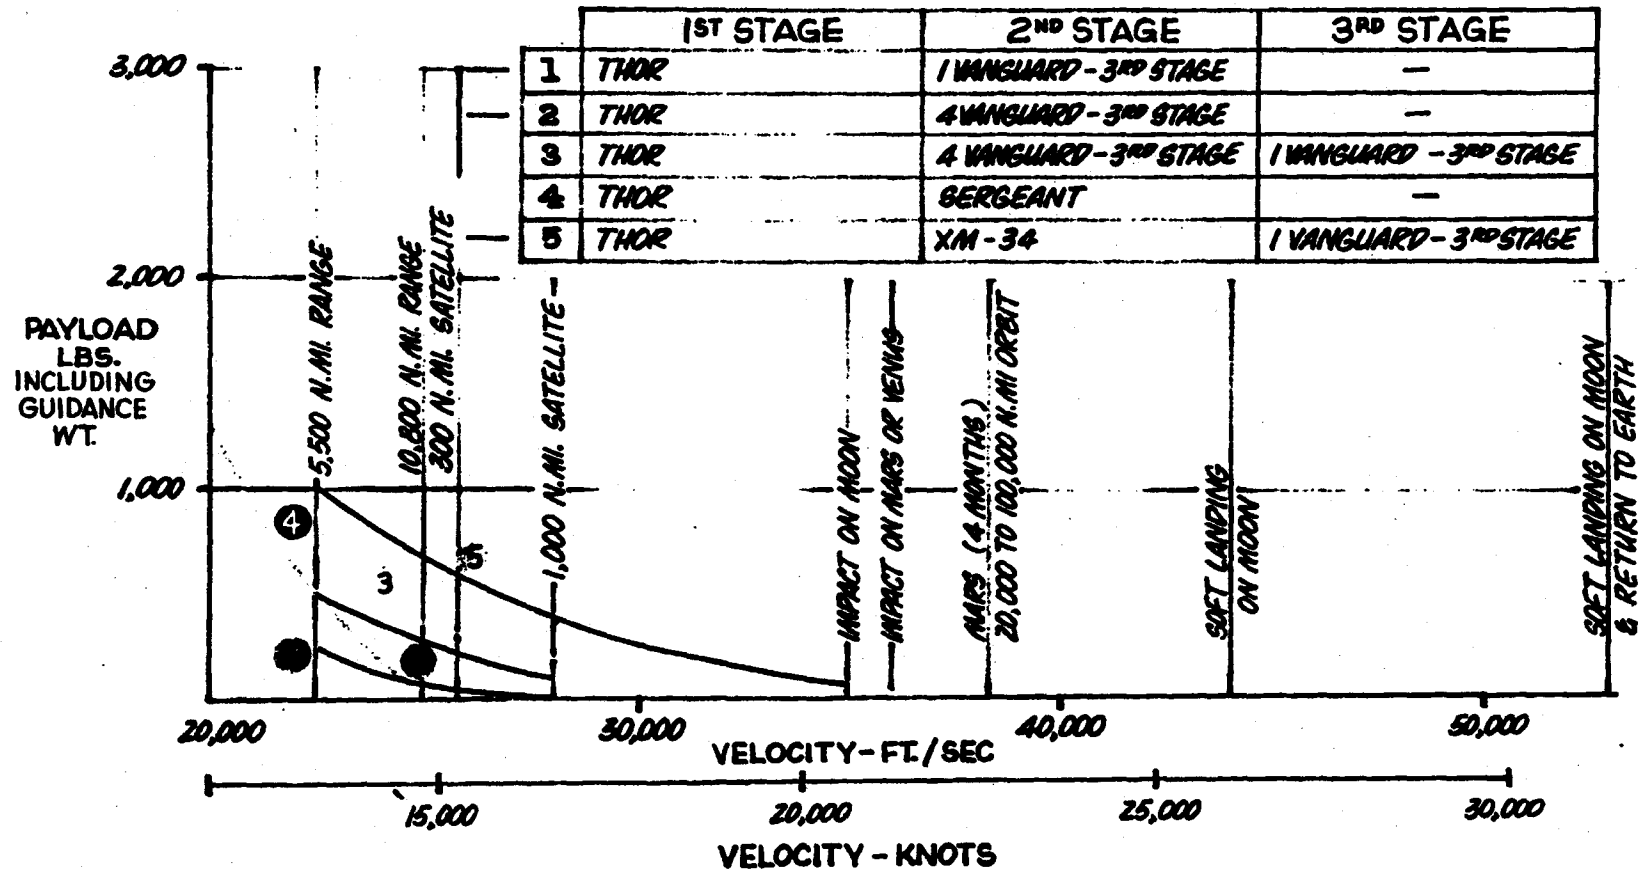

~~CONFIDENTIAL~~




~~CONFIDENTIAL~~

# THOR CAPABILITY WITH ADDED STAGES


(LIQUID PROPELLANT 2 ND STAGES)

	1 ST STAGE	2 ND STAGE	3 RD STAGE
1	THOR	VANGUARD 2ND STAGE	—
2	THOR 175,000 LB. THRUST	VANGUARD 2ND STAGE	VANGUARD 3RD STAGE
3	THOR 175,000 LB. ENGINE REDUCE FUEL TANK MILLING	15,000 LB. STORABLE YLR-81 ENGINE	—
4	THOR 175,000 LB. ENGINE REDUCE FUEL TANK MILLING	15,000 LB. $F_2-NH_3$ WEIGHT 15,000 LBS.	—

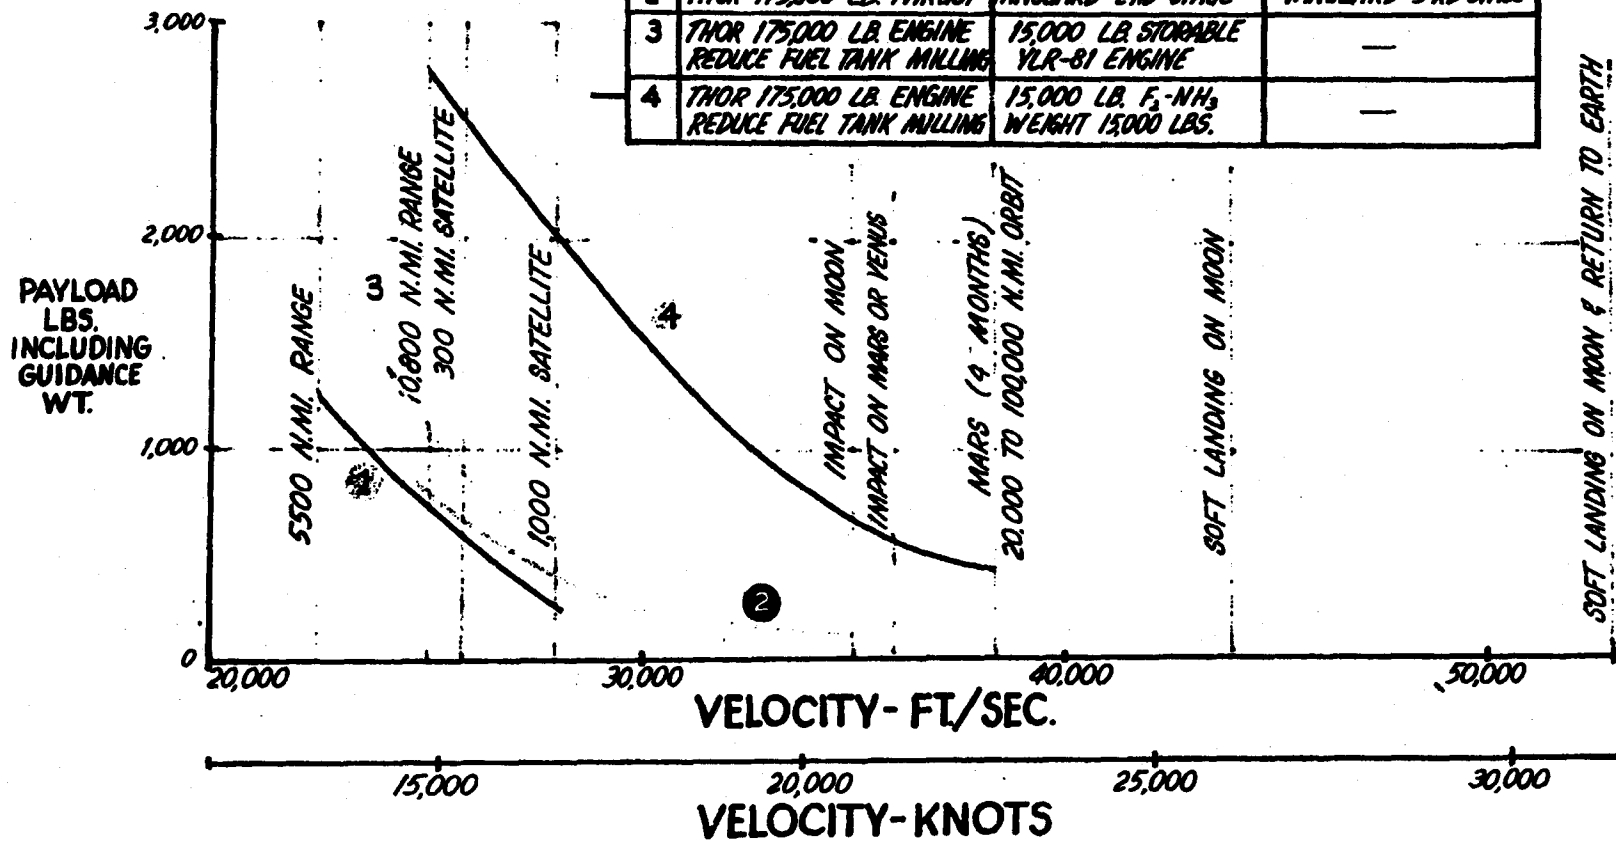~~CONFIDENTIAL~~


~~CONFIDENTIAL~~

# ATLAS CAPABILITY WITH ADDED STAGES

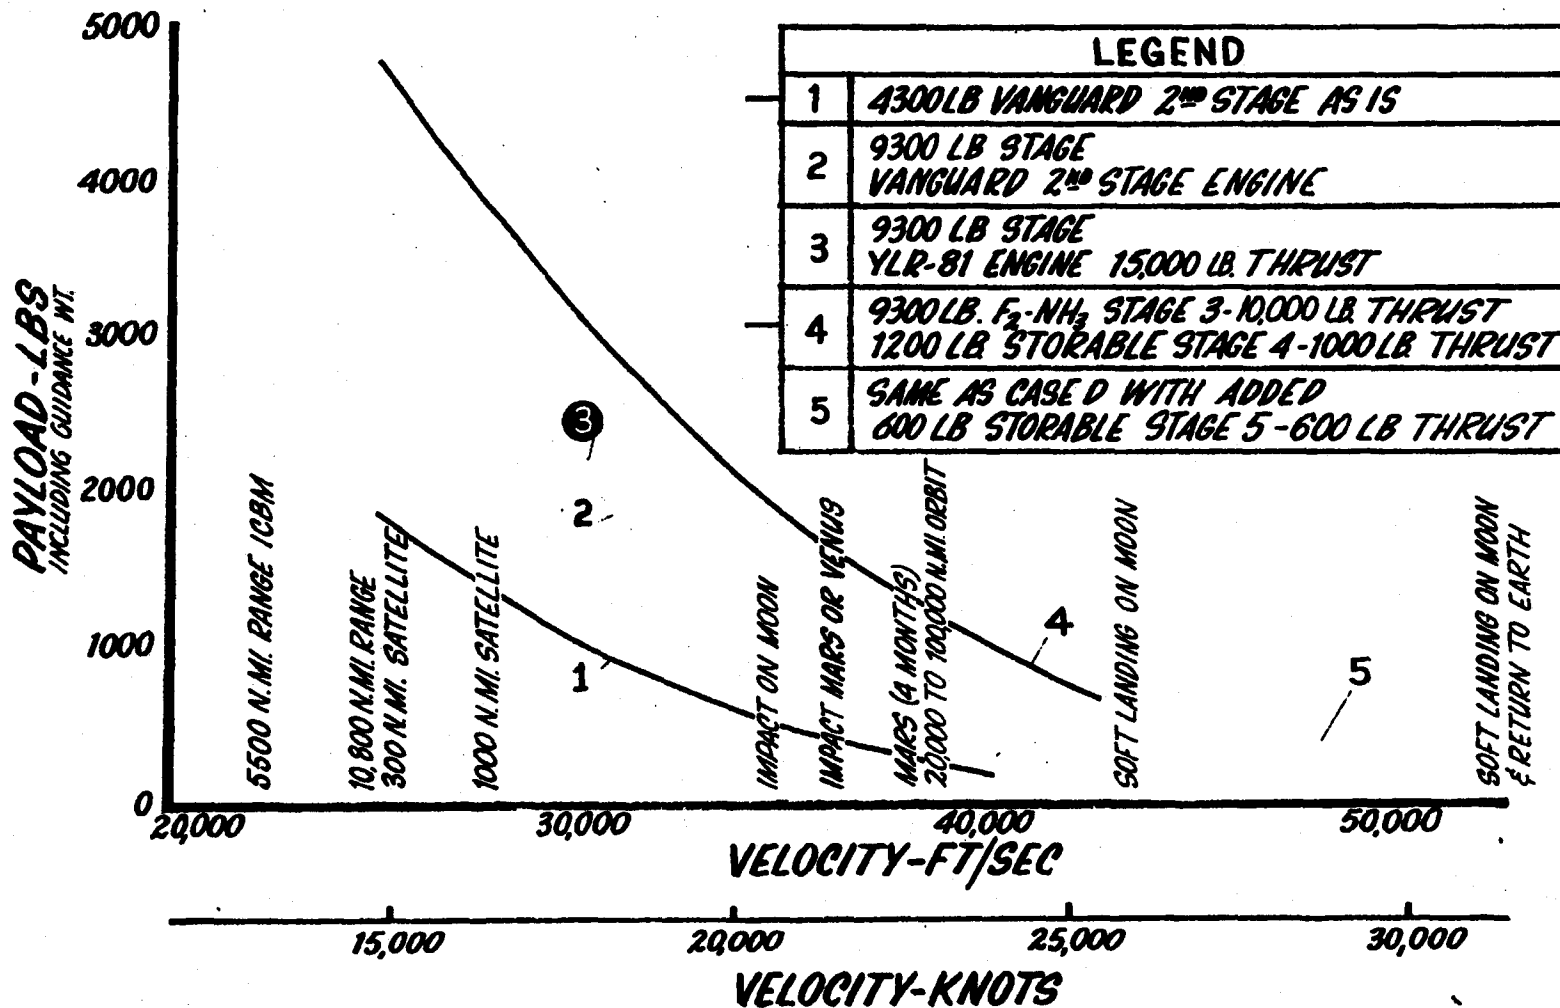

~~CONFIDENTIAL~~

# TITAN CAPABILITY WITH ADDED STAGES

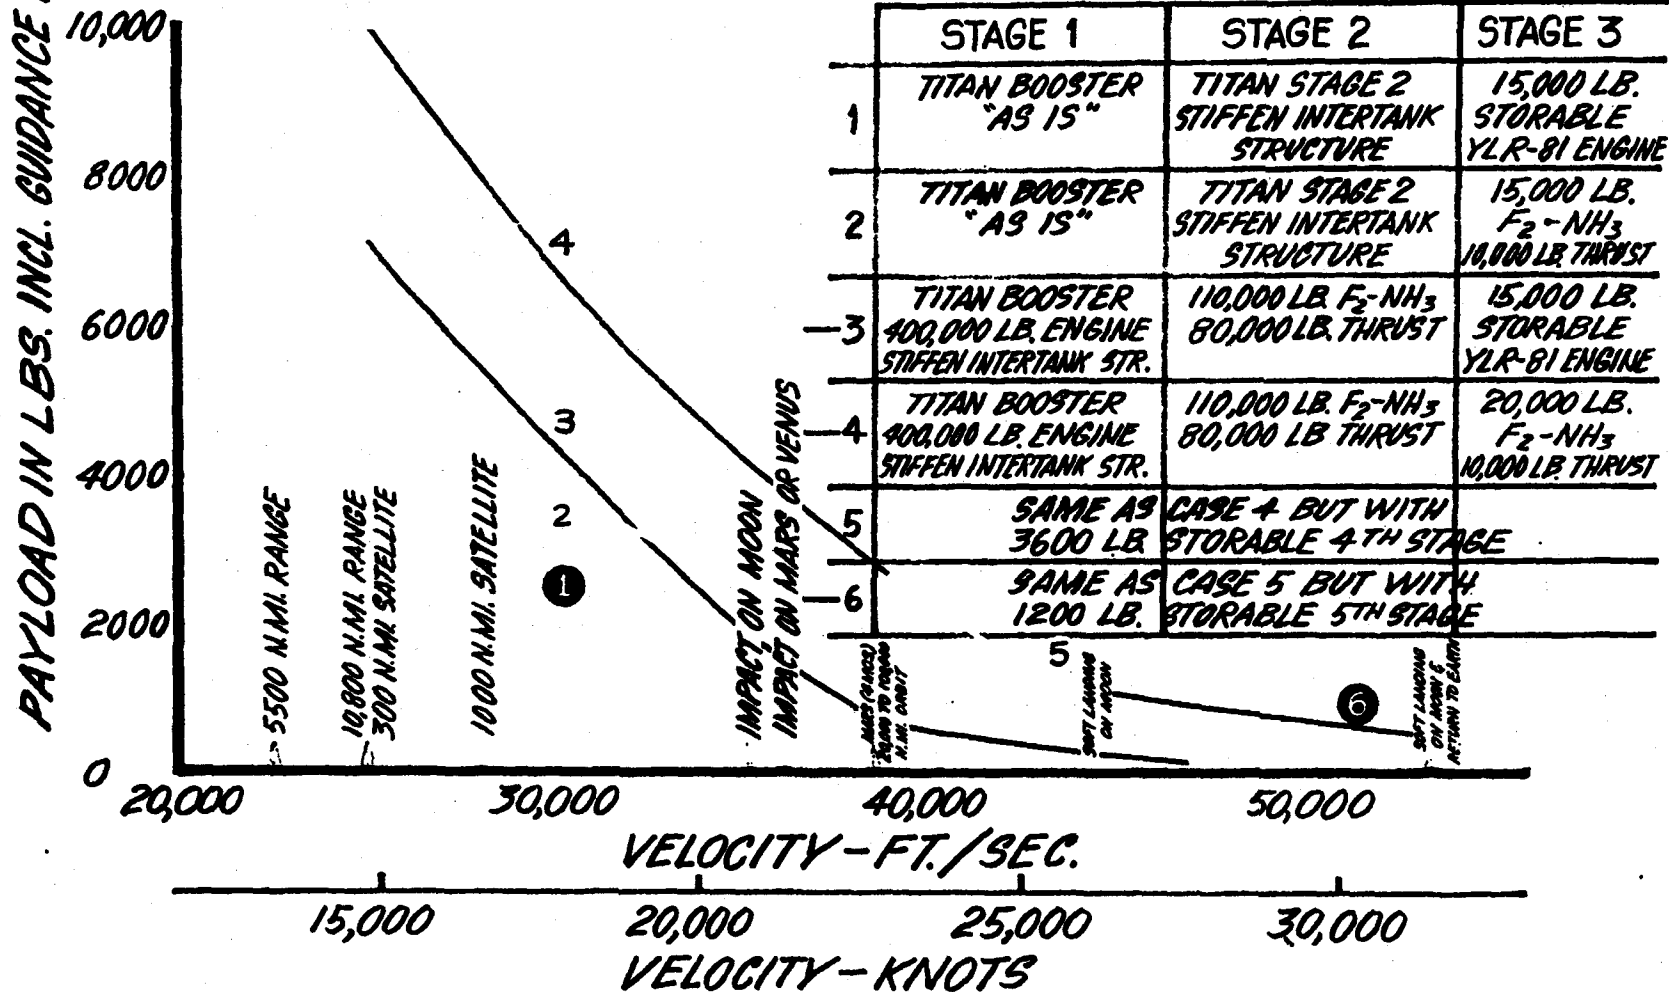

~~SECRET~~~~CONFIDENTIAL~~

4851 4 764R2

# 300 N. MILE ALTITUDE SATELLITE

	1 <sup>ST</sup> STAGE	2 <sup>ND</sup> STAGE	3 <sup>RD</sup> STAGE	PAYLOAD INCL. GUIDANCE	GUIDANCE CONSIDERATIONS
1.	THOR "AS IS"	2 VANGUARD (3RD STAGE)	—	50-100 LBS (NO GUIDANCE)	AUTOPLOT ONLY IN THOR SPUN-2ND STAGE 180 MI ECCENTRICITY
2.	THOR "AS IS"	4 VANGUARDS (3RD STAGE)	—	200-400 LBS (NO GUIDANCE)	INERTIAL GUID. ON THOR SPUN-2ND STAGE 70 MI ECCENTRICITY
3.	THOR "AS IS"	SERGEANT	—	0	<u>CASES 3-10</u>
✓4.	THOR "AS IS"	VANGUARD (2ND STAGE)	—	600 LBS.	GUIDANCE IN FINAL STAGE ORBIT ELLIPTICITY WILL BE
5.	THOR 175,000 LBS	15,000 LB STORBL. YLR-BIENGINE	—	1,000 LBS.	± 1/2 MI. WITH PRES ICBM RADIO
✓6.	THOR THRUST 175,000 LBS THICKER FUEL TANKS	WT 15,000 LBS F <sub>2</sub> - NH <sub>3</sub>	—	2,800 LBS.	SYST ± 3 MI WITH PRES. ICBM ALL INERTIAL
✓7.	ATLAS BOOST STAGE "AS IS"	ATLAS SUSTAINER "AS IS"	WT. 9,300 LBS STORABLE PROPELLANTS I <sub>sp</sub> = 270 SEC.	3,200 LBS.	SYST.
8.	ATLAS BOOST STAGE "AS IS"	ATLAS SUSTAINER "AS IS"	WT. 9300 LBS F <sub>2</sub> NH <sub>3</sub>	4760 LBS.	<u>GUIDANCE WEIGHTS</u>
✓9.	TITAN BOOSTER AS IS 300,000 LB THRUST	TITAN 2ND STAGE "AS IS" (INTER TANK STRUC. REINFOR.)	WT. 15,000 LBS F <sub>2</sub> NH <sub>3</sub>	5,900 LBS.	• RADIO SYSTEM ~ 175 LBS • ALL INERTIAL SYS ~ 450 LBS
✓10.	TITAN BOOSTER AIRFRAME "AS IS" ENG. UP RATED TO 400,000 LBS	WT 110,000 LBS F <sub>2</sub> NH <sub>3</sub>	WT. 20,000 LBS F <sub>2</sub> NH <sub>3</sub>	10,000 LBS.	• POWER SUPPLY - 50 LBS

~~CONFIDENTIAL~~

WD 57-05803

~~CONFIDENTIAL~~

# HIGH ALTITUDE SATELLITES

(15,000 to 150,000 MILES)

	FIRST STAGE	SECOND STAGE	THIRD STAGE (BURNS IN TWO PERIODS)	PAYLOAD INCLUDING GUIDANCE *
✓1.	<b>THOR</b> 175,000 LB. ENGINE THICKER FUEL TANK	TWO PERIOD BURNING 15,000 LB. WT. F <sub>2</sub> -NH <sub>3</sub>		430 LB. THREE STAGE SHOULD BE APPRECIABLY BETTER
2.	<b>ATLAS</b> BOOST STAGE "AS IS"	<b>ATLAS</b> SUSTAINER "AS IS"	9300 LB. STORABLE PROPELLANTS I <sub>sp</sub> =270 SEC.	200 LBS.
3.	<b>ATLAS</b> BOOST STAGE "AS IS"	<b>ATLAS</b> SUSTAINER "AS IS"	9300 LB. F <sub>2</sub> -NH <sub>3</sub>	1260 LBS.
✓4.	<b>TITAN</b> BOOSTER "AS IS"	<b>TITAN</b> 2 <sup>ND</sup> STAGE "AS IS" WITH INTERTANK STRUCTURE STIFFENED	15,000 LB. WT. F <sub>2</sub> -NH <sub>3</sub>	1200 LBS.
✓5.	<b>TITAN</b> AIRFRAME "AS IS" ENG. UP TO 400,000 LB.	110,000 LB. WT. F <sub>2</sub> -NH <sub>3</sub>	20,000 LB. WT. F <sub>2</sub> -NH <sub>3</sub>	2700 LBS.

\* PRESENT ARMA ALL INERTIAL GUIDANCE SYSTEM (460 LB.)  
GIVES ORBITS WITH ABOUT { ± 30 MILES ELLIPTICITY AT 15,000 MILES.  
  { ± 600 MILES ELLIPTICITY AT 150,000 MILES.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

3742 4 674 RZ

# MANNED EXPLORATION OF SATELLITE AND RE-ENTRY ENVIRONMENTS

	1ST STAGE	2ND STAGE	3RD STAGE	TRAJECTORY	PAYLOAD INCLUDING GUIDANCE
1	ATLAS BOOST STAGE "AS IS"	ATLAS SUSTAINER "AS IS"	NONE	$V_B \approx 29,000$ FT/SEC	2000 LB
2	ATLAS BOOST STAGE "AS IS"	ATLAS SUSTAINER "AS IS"	WT. 9300 LB STORABLE ( $I_{sp}$ -270) PROPELLANTS	200 MI ALTITUDE SATELLITE	3500 LB
3	TITAN BOOSTER "AS IS"	TITAN 2ND STAGE "AS IS" INTERTANK STIFFENING	WT 15000 LB $F_2-NH_3$	300 MI ALTITUDE SATELLITE	3800 LB
4	TITAN BOOSTER AIRFRAME "AS IS" 400,000 LB ENGINE	WT 110,000 LB $F_2-NH_3$	WT 20,000 LB $F_2-NH_3$	300 MI ALTITUDE SATELLITE	6500 LB


- NOTE: 1. RE-ENTRY ANGLE APPROXIMATELY  $2^\circ$ ; ~5 MINUTES FREE FLIGHT  
2. RE-ENTRY ANGLE APPROXIMATELY  $2^\circ$ ; HRS. TO DAYS OF FREE FLT.  
3. TIME IN ORBIT ~ DAYS  
4. TIME IN ORBIT ~ WEEKS

~~SECRET~~

CONFIDENTIAL

WD-57-05803

# CONFIDENTIAL MANNED RE-ENTRY TEST VEHICLE

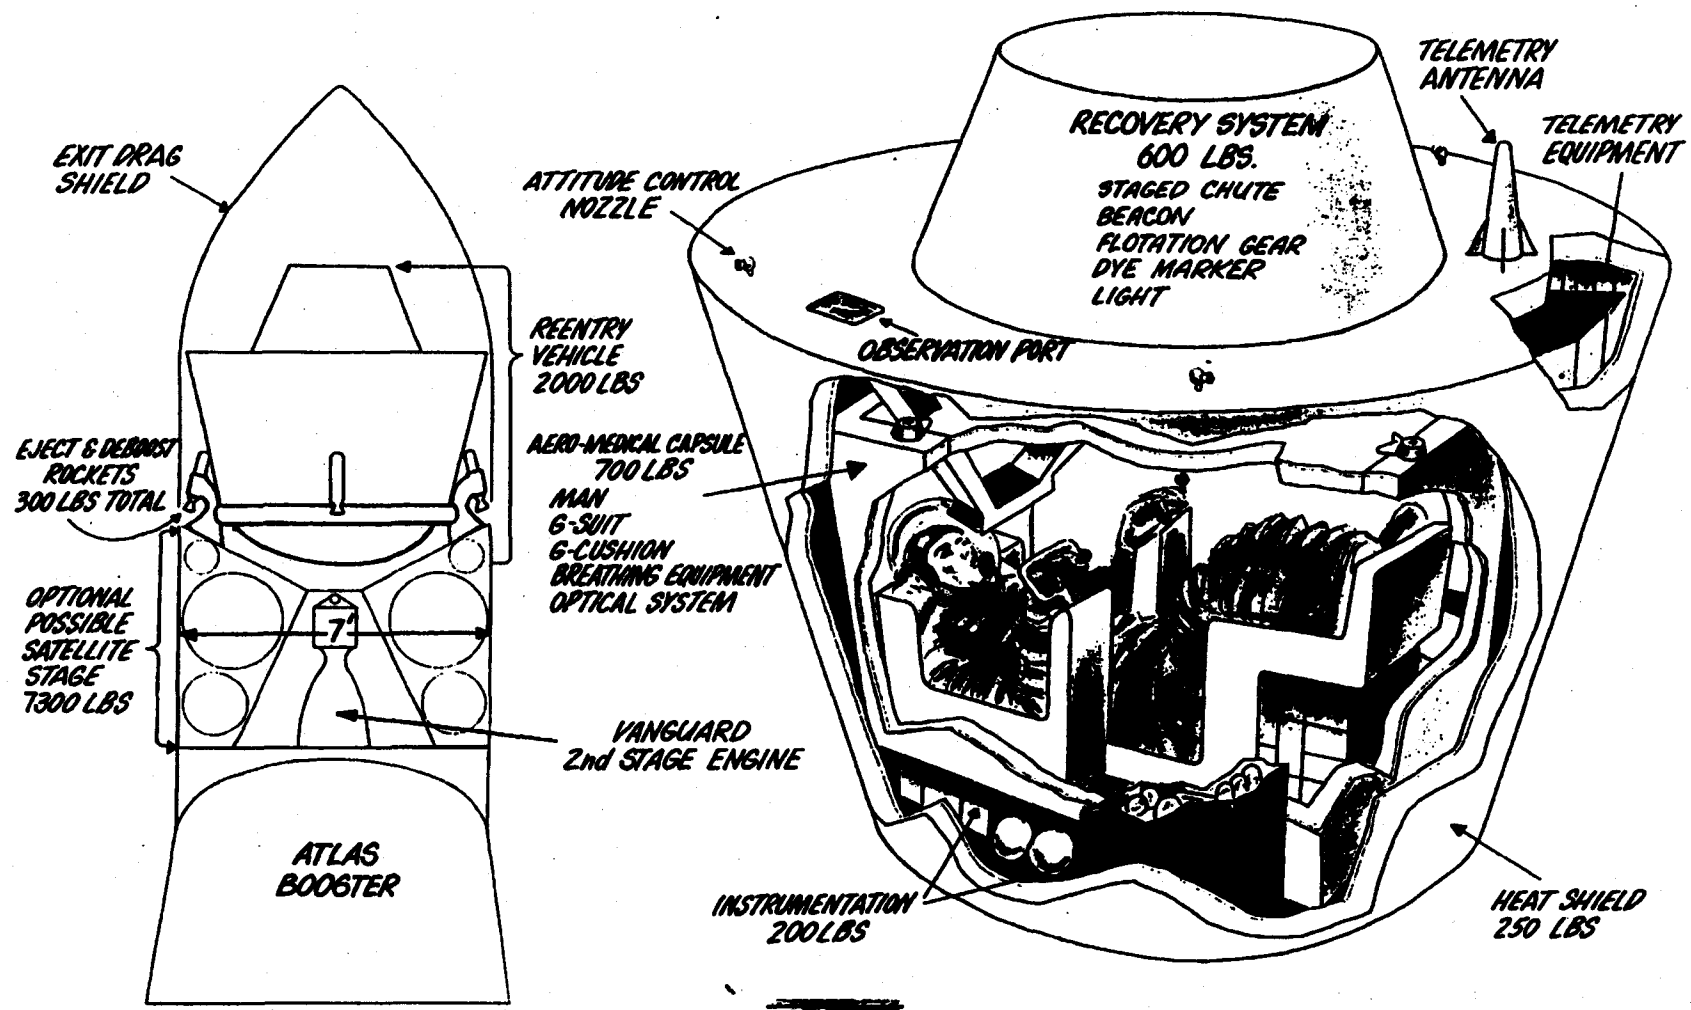

~~CONFIDENTIAL~~

# **MANNED RE-ENTRY STUDY**

## **ASSUMPTIONS**

### **HEAT SHIELD**

**1 MATERIAL:** SAME AS ADVANCED ICBM - AVAILABLE CY59

**2 RECOVERY SYSTEM:** COOK SYSTEM IMPROVED

**3 CONTRACTOR:** PREFERABLY ONE IN PRESENT NOSE CONE PROGRAM - TO USE DEVELOPED BACKGROUND

### **4 FLIGHT PROGRAM:**

10 FLIGHTS WITH APES

12 MANNED FLIGHTS



5 PAYLOAD CAPSULES

10 HEAT SHIELDS

10 RECOVERY SYSTEMS

12 COMPLETE VEHICLES

~~SECRET~~

~~CONFIDENTIAL~~



~~CONFIDENTIAL~~

4840 4 753R2

# MANNED BALLISTIC RE-ENTRY

## DEVELOPMENT SCHEDULE

	CY '58	CY 59	CY 60	CY 61	CY 62	CY 63
<b>INITIAL STUDY</b> BY CONTRACTOR						
<b>VEHICLE</b> DESIGN FABRICATION						
<b>RECOVERY</b> DESIGN FAB. & TESTS						
<b>SYSTEM CHECKOUT</b>						
<b>FLIGHTS</b> ANIMAL BALLISTIC REENTRY				10 FLIGHTS		
MANNED BALLISTIC REENTRY						12 FLTS.

ESTIMATED COST : \$ 45,000,000.

~~CONFIDENTIAL~~

WD 57-05803

~~CONFIDENTIAL~~

4847 4 760 R1

# IMPACT ON MOON

	1 <sup>ST</sup> STAGE	2 <sup>ND</sup> STAGE	3 <sup>RD</sup> STAGE	PAYLOAD <small>INCLUDING GUIDANCE</small>
1	THOR (GUIDANCE ONLY 'AS IS' IN THOR)	4 VANGUARDS	1 VANGUARD	50-100 LBS. (NO GUIDANCE)
2	THOR	XM-34	VANGUARD 3 <sup>RD</sup> STAGE	50 LBS.
✓ 3	THOR 175,000 LBS.	VANGUARD 2 <sup>ND</sup> STAGE	VANGUARD 3 <sup>RD</sup> STAGE	160 LBS.
4	THOR 175,000 LBS.	15,000 LBS-STORABLE YLR-81 - ENGINE	_____	0
✓ 5	THOR THRUST 175,000 LBS. THICKER FUEL TANK	WT. 15,000 LBS. F <sub>2</sub> -NH <sub>3</sub>	_____	650 LBS.
6	ATLAS BOOST STAGE 'AS IS'	ATLAS SUSTAINER 'AS IS'	WT. 9,300 LBS. I <sub>sp</sub> = 270	700 LBS.
7	ATLAS BOOST STAGE 'AS IS'	ATLAS SUSTAINER 'AG IS'	WT. 9,300 LBS. F <sub>2</sub> -NH <sub>3</sub>	2,000 LBS.
✓ 8	TITAN BOOSTER 'AS IS'	TITAN 2 <sup>ND</sup> STAGE 'AS IS' INTERTANK REINFORCEMENT	WT. 15,000 LBS. F <sub>2</sub> -NH <sub>3</sub>	2,150 LBS.
✓ 9	TITAN BOOSTER AIRFRAME 'AS IS' THRUST 400,000 LBS.	WT. 110,000 LBS. F <sub>2</sub> -NH <sub>3</sub>	WT. 20,000 LBS. F <sub>2</sub> -NH <sub>3</sub>	4,200 LBS.

CASE 1 THRU 3 BETWEEN 10% AND 50% CHANCE OF HITTING MOON

CASES 5 THRU 9: PRESENT RADIO GUIDANCE SYSTEM (175 LBS. + 50 LBS. P.S.) WOULD PRODUCE C.E.P. ON MOON  $\approx$  70 MI.  
PRESENT ALL INERTIAL GUIDANCE (460 LBS. + 50 LBS. P.S.) WOULD PRODUCE C.E.P. ON MOON  $\approx$  70 MI.

~~CONFIDENTIAL~~

WD 57-05803

~~SECRET~~  
**CONFIDENTIAL**

4744 A 676 R2

# **CIRCUMLUNAR FLIGHT & SOFT LANDING ON EARTH (AERODYNAMIC DECELERATION)**

	1 ST STAGE	2 ND STAGE	3 RD STAGE	PAYLOAD INCLUDING GUID* RETURN TO EARTH
1	THOR "AS IS"	9 VANGUARDS	1 VANGUARD	50 LB. (MARGINAL)
V2	THOR THRUST 175,000 LBS. THICKER FUEL TANK	WT. 15,000 LBS. F <sub>2</sub> - NH <sub>3</sub>	(THREE STAGE WOULD BE BETTER)	900 LBS.
3	ATLAS BOOSTER STAGE "AS IS"	ATLAS SUSTAINER "AS IS"	WT. 9,300 LBS. 1-20 STORABLE PROPELLANTS	0 LBS.
4	ATLAS BOOSTER STAGE "AS IS"	ATLAS SUSTAINER "AS IS"	WT. 9,300 LBS. F <sub>2</sub> - NH <sub>3</sub>	1250 LBS.
V5	TITAN BOOSTER "AS IS"	TITAN 2 ND STAGE "AS IS" "INTERTANK STIFFENING"	WT. 15,000 LBS. F <sub>2</sub> NH <sub>3</sub>	1350 LBS.
V6	TITAN BOOSTER AIRFRAME "AS IS" THRUST 900,000 LBS	WT. 110,000 LBS. F <sub>2</sub> - NH <sub>3</sub>	WT. 20,000 LBS. F <sub>2</sub> - NH <sub>3</sub>	2,700 LBS.

**\*GUIDANCE CONSIDERATIONS**

CASE 1: THOR GUIDANCE IN 1ST STAGE. NEGLIGIBLE PROBABILITY OF HITTING EARTH ON RETURN.

CASES 2-6: PRESENT RADIO GUIDANCE (170 LB. + 50 LB. P.S.) IN THIRD STAGE (2ND FOR CASE 2)

WOULD PRODUCE ± 700 MILE ERROR IN DISTANCE FROM BACK OF MOON.

ERROR ON RETURN TO EARTH WOULD BE ABOUT ± 800 MILES ON EARTH CROSS SECTION.

ERROR IN IMPACT POINT WOULD BE CONSIDERABLY GREATER.

~~SECRET~~  
**CONFIDENTIAL**

WD 57-65803

~~CONFIDENTIAL~~

# SOFT LANDING ON MOON

	1ST STAGE	2ND STAGE	3RD STAGE (INCLD. BOOST GUID.)	LANDING DECELER. STAGE	PAYLOAD INCLD GUIDANCE DECELERATION*
✓1	THOR THRUST 175,000 LB THICKER FUEL TANK	WT-15000 LBS F <sub>2</sub> - NH <sub>3</sub> (INCLD BOOST GUID)	NONE - 3 STAGE WOULD BE BETTER	650 LBS STORABLE PROPELL.	180 LBS
2	ATLAS BOOST STAGE 'AS IS'	ATLAS SUSTAINER 'AS IS'	WT-9300 LBS STORABLE PROPELL. I <sub>sp</sub> = 270	700 LBS STORABLE PROPELL.	200 LBS
3	ATLAS BOOST STAGE 'AS IS'	ATLAS SUSTAINER 'AS IS'	WT-9300 LBS F <sub>2</sub> - NH <sub>3</sub>	2000 LBS STORABLE PROPELL	600 LBS
4	TITAN BOOST STAGE 'AS IS'	TITAN 2ND STAGE 'AS IS' INTER-TANK REINFORCE.	WT-15000 LBS F <sub>2</sub> - NH <sub>3</sub>	2150 STORABLE PROPELL	750 LBS
✓5	TITAN AIRFRAME 'AS IS' ENGINE UP TO 400,000 LB	WT-110,000 LBS F <sub>2</sub> - NH <sub>3</sub>	WT-20,000 LBS F <sub>2</sub> - NH <sub>3</sub>	9200 LBS STORABLE PROPELL.	1400 LBS

\* CEP ON MOON ± 70 MI WITH 170 LB RADIO SYSTEM + 50 LB P.S IN LAST BOOST STAGE. DECELERATION GUIDANCE SYSTEM - WEIGHT ABOUT 40 LBS FOR IMPACT AT LESS THAN 20 FPS CARRIED IN FINAL STAGE

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

4746 4 17801

# SOFT LANDING ON MOON AND RETURN TO EARTH

## AERODYNAMIC DECELERATION

	BASIC VEHICLE	1ST STAGE	2ND STAGE	3RD STAGE	MOON LANDING DECELERATION STAGE	ESCAPE FROM MOON STAGE	PAYLOAD* INCLUDING TERMINAL GUIDANCE
1.	ATLAS	BOOST STAGE "AS IS"	SUSTAINER "AS IS"	WT. 9300 LB. STORABLE FUELS-I <sub>2</sub> -270	700 LBS STORABLE PROPELLANTS	200 LBS STORABLE PROPELLANTS	0 LBS
2.	ATLAS	BOOST STAGE "AS IS"	SUSTAINER "AS IS"	WT. 9300 LB. F <sub>2</sub> -NH <sub>3</sub>	2000 LBS F <sub>2</sub> -NH <sub>3</sub>	820 LBS. F <sub>2</sub> -NH <sub>3</sub>	250 LB.
3.	TITAN	BOOSTER "AS IS"	2ND STAGE "AS IS" BUT INTERTANK STIFFENED	WT. 15,000 LB. F <sub>2</sub> NH <sub>3</sub>	1200 LBS STORABLE PROPELLANTS	460 LBS. STORABLE PROPELLANTS	120 LB.
V4.	TITAN	BOOSTER AIRFRAME "AS IS" 400,000 LB. ENGINE	WEIGHT 110,000 LBS. F <sub>2</sub> -NH <sub>3</sub>	WT. 20,000 LB. F <sub>2</sub> -NH <sub>3</sub>	4200 LBS. F <sub>2</sub> NH <sub>3</sub>	1700 LB. F <sub>2</sub> -NH <sub>3</sub>	520 LB.
V5.	LARGE MILITARY SATELLITE VEHICLE	WEIGHT 1,500,000 LBS. THRUST 2,000,000 LB. LOX-RP	WEIGHT 500,000 LBS. THRUST 400,000 LBS. F <sub>2</sub> -NH <sub>3</sub>	WEIGHT 150,000 LBS. THRUST 130,000 LBS. F <sub>2</sub> -NH <sub>3</sub>	WEIGHT 39,000 LBS. THRUST 20,000 LBS.	WEIGHT 16,000 LBS. THRUST 8,000 LBS.	3,000 LB.

\* GUIDANCE CONSIDERATIONS:

1. PRESENT RADIO GUIDANCE SYSTEM IN 3RD STAGE WOULD GIVE 70 MI C.E.P. ON MOON.

2. MOON LANDING GUIDANCE SYSTEM- 40 LBS. IN DECELERATION STAGE.

3. OPTICAL HOMING SYSTEM IN MOON ESCAPE STAGE. NO WEIGHT OR ACCURACY ESTIMATES AVAILABLE.

~~SECRET~~

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

4747 4 679 R1

~~SECRET~~  
**INTERPLANETARY MISSIONS**

MISSION	PAYLOADS (INCLUDING TERMINAL GUIDANCE)					
	1ST STAGE	THOR 175,000 LB. ENGINE THICKER FUEL TANK	ATLAS BOOST STAGE	ATLAS BOOST STAGE	TITAN BOOSTER 'A8 18'	TITAN 400,000 LB. ENGINE
	2ND	15,000 LB. F <sub>2</sub> -NH <sub>3</sub>	ATLAS SUSTAINER	ATLAS SUSTAINER	TITAN 2ND STAGE IS 18	40,000 LB. WT. F <sub>2</sub> -NH <sub>3</sub>
	3RD	NONE	9,300 LB. STORABLE F <sub>2</sub> -270	9,300 LB. F <sub>2</sub> -NH <sub>3</sub>	15,000 LB. WT. F <sub>2</sub> -NH <sub>3</sub>	20,000 LB. WT. F <sub>2</sub> -NH <sub>3</sub>
1	PROBE NEAR MARS OR VENUS	✓ 400 LBS.	450 LBS.	1100 LBS.	1300 LBS.	2400 LBS.
2	BEACON ON MARS ATMOSPHERIC DECELERATION	✓ 240 LBS.	270 LBS.	660 LBS.	800 LBS.	✓ 1450 LBS.
3	BEACON ON VENUS ATMOSPHERIC DECELERATION	✓ 300 LBS.	340 LBS.	820 LBS.	950 LBS.	✓ 1800 LBS.
4	MARS LANDING AND RETURN ATMOSPHERIC DECELERATION					110 LB. MARS TAKEOFF STAGE WT. 1800 LBS. STORABLE FUELS
5	SOLAR PROBE, INSIDE ORBIT OF MERCURY					✓ 1000 LB. 4TH STAGE WT. 4,200 LBS. F <sub>2</sub> -NH <sub>3</sub>

GUIDANCE CONSIDERATIONS: FOR MARS AND VENUS AN ADVANCED GUIDANCE SYSTEM (.2 FPS. CUTOFF VELOCITY ERROR) WOULD GIVE PROBABLE MISS OF 1000 MILES. HENCE A SMALL HOVING CORRECTION WOULD BE SUFFICIENT TO HIT.

~~SECRET~~  
CONFIDENTIAL


12D57-05802

~~CONFIDENTIAL~~

4896 . 094

~~SECRET~~  
**INTERPLANETARY GUIDANCE****INITIAL OR LAUNCH PHASE***PRESENT ICBM SYSTEMS ARE ADEQUATE***MIDCOURSE GUIDANCE***EARTH RADAR**LONG BASELINE RADIO**EARTH & MOON TRANSPONDERS**TRANSPONDERS ON FOUR SATELLITES**PLANET TRACKER**STAR TRACKER**SUN TRACKER**} OPTICAL OR INFRARED***TERMINAL SYSTEMS***SENSING FOR PROPER APPROACH (OPTICAL OR RADAR)**CALCULATION & MANEUVER FOR ORBITING OR CLOSE APPROACH**ALTIMETERS & RETARDING THRUST FOR SOFT IMPACT*~~SECRET~~  
~~CONFIDENTIAL~~

~~CONFIDENTIAL~~


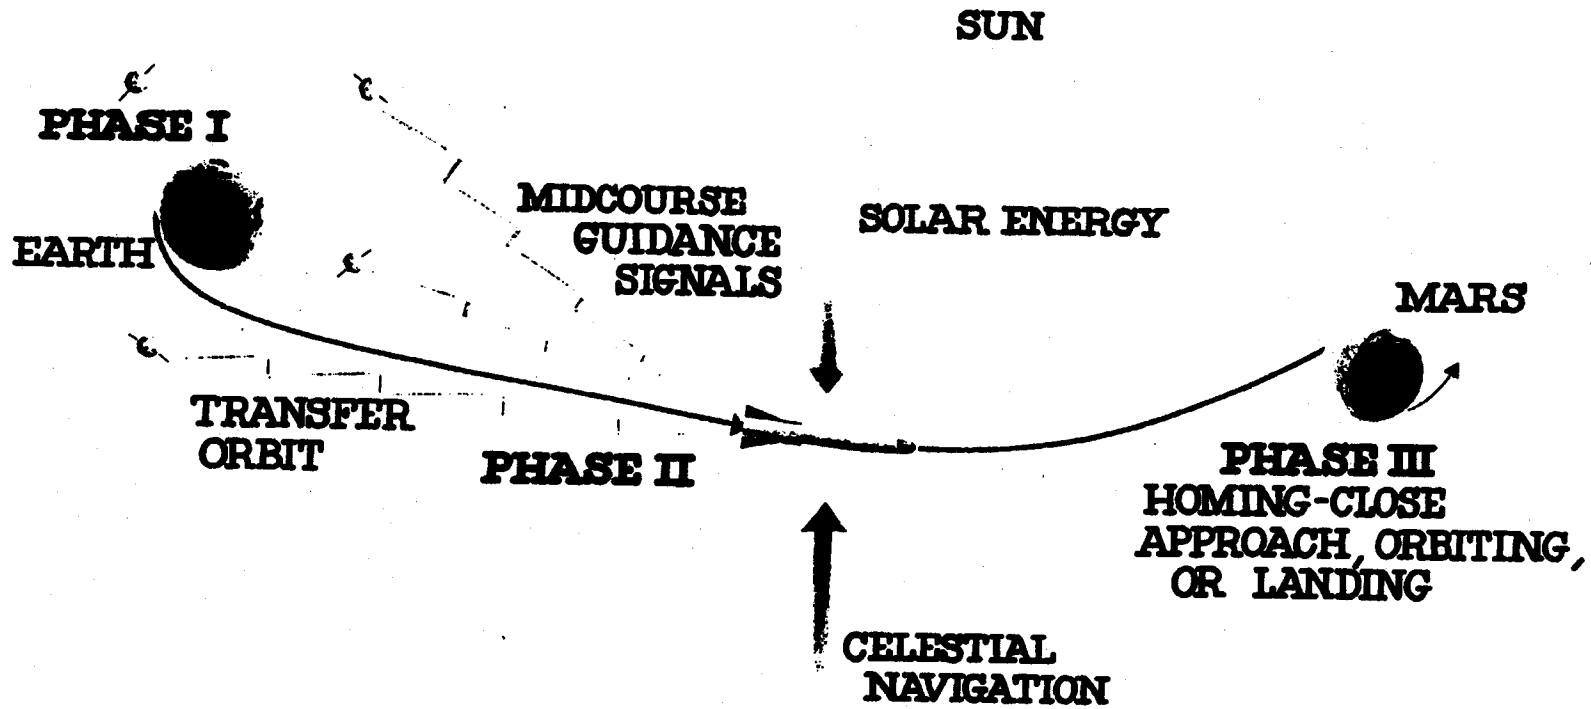


~~CONFIDENTIAL~~



4842 4 755

# MOON EXPLORATION TV

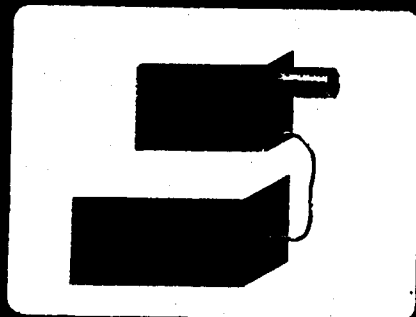

100' DISH  
ANTENNA

INDIANAPOLIS

4843 4 756

# MARS EXPLORATION FACSIMILE

MARS



A vertical stack of three rectangular boxes representing equipment components. The top box is labeled 'TV CAMERA', the middle box is labeled 'STORAGE TUBE', and the bottom box is labeled 'XMTR 10 WATTS'. A thin line connects the top box to the antenna below.

TV  
CAMERA

STORAGE  
TUBE

XMTR  
10 WATTS

100' DISH  
ANTENNA

A rectangular box containing a circular image of Mars. Below the image is a label 'NARROW BANDWIDTH RECEIVER'. A line connects the antenna to the receiver.

NARROW  
BANDWIDTH  
RECEIVER

~~CONFIDENTIAL~~

# ***DATA TRANSMISSION PROBLEMS***

## ***I*** TYPE OF DATA

- A. *T.V.*
- B. *FACSIMILE*
- C. *ANALOG OR DIGITAL MEASUREMENT*

## ***II*** TRANSMISSION METHOD

- A. *REAL TIME*
- B. *FAST RETURN*
- C. *SLOW RETURN*
- D. *DELAYED RETURN*
- E. *CAPSULE RECOVERY*

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

# PROBLEM AREAS

1. ASTROPHYSICAL & PLANETARY CONSTANTS
  - A. ASTRONOMICAL UNIT
  - B. INTERPLANETARY DUST & METEORITE DENSITY
  - C. PLANETARY ATMOSPHERES
2. COMPREHENSIVE STUDY OF TRAJECTORIES & MISS COEFFICIENTS
3. SOFT LANDING PROCEDURES & CORRESPONDING GUIDANCE REQUIREMENTS
4. LIGHT WEIGHT, LOW POWER COMPUTERS
5. PROPULSIVE ENERGY REQUIREMENTS FOR MID COURSE OR TERMINAL GUIDANCE
6. ORBITAL STABILITY OF TRANSPONDER SATELLITES USED IN LONG BASE GUIDANCE SYSTEMS
7. MILLIMETER WAVE COMPONENTS FOR LONG DISTANCE TRANSMISSION
8. HIGH EFFICIENCY ELECTRICAL ENERGY SOURCES
9. TERRESTRIAL COMPONENT TEST PROCEDURES

~~CONFIDENTIAL~~

## **PRIMARY COMBINATIONS RECOMMENDED WITH PRESENT BOOSTERS**

1. THOR + VANGUARD 2<sup>ND</sup> STAGE (+ VANGUARD 3<sup>RD</sup> STAGE)
2. THOR + 15,000 LB F<sub>2</sub> STAGE
3. ATLAS + 9300 LB VANGUARD ENGINE STAGE (MANNED REENTRY ONLY)
4. ATLAS + PRESENT 117-L STAGE
5. TITAN 1<sup>ST</sup> STAGE + TITAN 2<sup>ND</sup> STAGE + 15,000 LB. F<sub>2</sub> STAGE.
6. TITAN 1<sup>ST</sup> STAGE + 110,000 LB. F<sub>2</sub> + 20,000 LB. F<sub>2</sub> STAGE.

~~CONFIDENTIAL~~

4844 4 757 RI

# FAMILY OF ADDITIONAL STAGES FOR PRESENT BOOSTERS

EXISTING VANGUARD  
STAGE 2 ENGINE & TANKS

VANGUARD 2nd STAGE ENG  
NEW TANKS

NEW ENGINE & TANKS



NEW TITAN 2nd STAGE  
NEW ENGINE & TANKS



**STAGE WEIGHT**  
NOMINAL-LBS  
ALTERNATE-LBS

3800

9300

15,000  
20,000

110,000  
150,000

## PROPULSION

ENGINE

VANGUARD STG 2

VANGUARD 2nd STAGE

NEW ENGINE

NEW ENGINE

PROPELLANT

WFNA-UDMH

WFNA-UDMH

F<sub>2</sub>NH<sub>3</sub> OR  
F<sub>2</sub>N<sub>2</sub>H<sub>4</sub>

F<sub>2</sub>NH<sub>3</sub> OR  
F<sub>2</sub>N<sub>2</sub>H<sub>4</sub>

PRESSURE FED CHAR.

THRUST-LBS

7700

7700

10,000

80,000

I<sub>sp</sub> - SEC

270

270

370

370

CHAMBER PRESS-PSI

200

200

120

150

TURBOPUMP FED

THRUST-LBS

-

-

-

135,000

I<sub>sp</sub> SEC

-

-

-

370

CHAMBER PRESS-PSI

-

-

-

250

EXPANSION RATIO

20:1

20:1

30:1

25:1

**STAGE USED WITH BOOSTERS,**

THOR;

THOR, ATLAS  
TITAN

THOR, TITAN  
SUPER TITAN

TITAN


~~CONFIDENTIAL~~

~~CONFIDENTIAL~~


4845 4 758 R-1

# DEVELOPMENT OF ADDITIONAL STAGES FOR PRESENT BOOSTERS

1. VANGUARD STAGE II - AVAILABLE ON 60 DAY NOTICE - NO DEVELOPMENT REQUIRED
2. STORABLE 9300 LB STAGE VANGUARD ENG AVAILABLE - STAGE DEVELOPMENT COST ~ \$ 3 MILLION  
STAGE DEVELOPMENT TIME ~ 8 MONTHS.
3. FLUORINE 15000 LB STAGE - ESTIMATED COST \$ 8.0 MILLION  
6.0 MILLION ENGINE  
2.0 MILLION TANKAGE & SYSTEM INTEGRATION

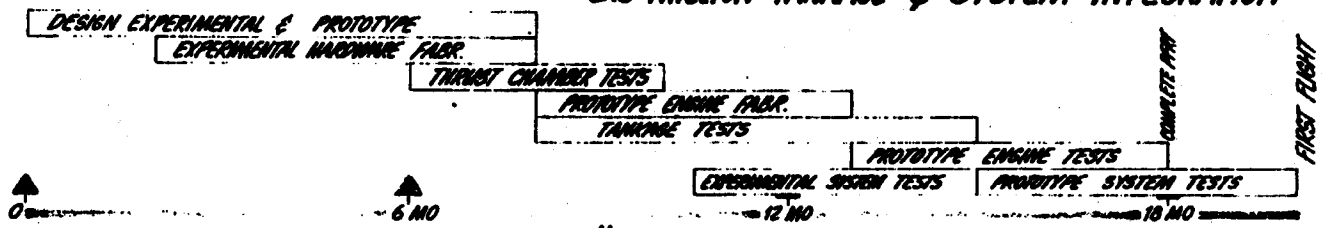


4. FLUORINE 110,000 LB STAGE - ESTIMATED COST \$ 50 MILLION  
40 MILLION FOR ENGINE  
10 MILLION FOR TANK & INTEGRATION

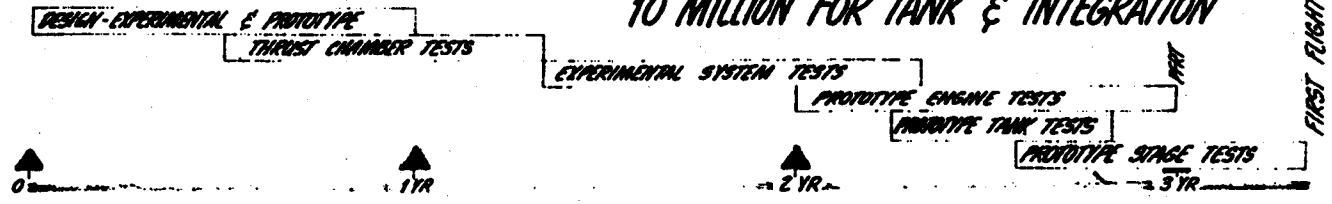

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

# BOOSTER AVAILABILITY

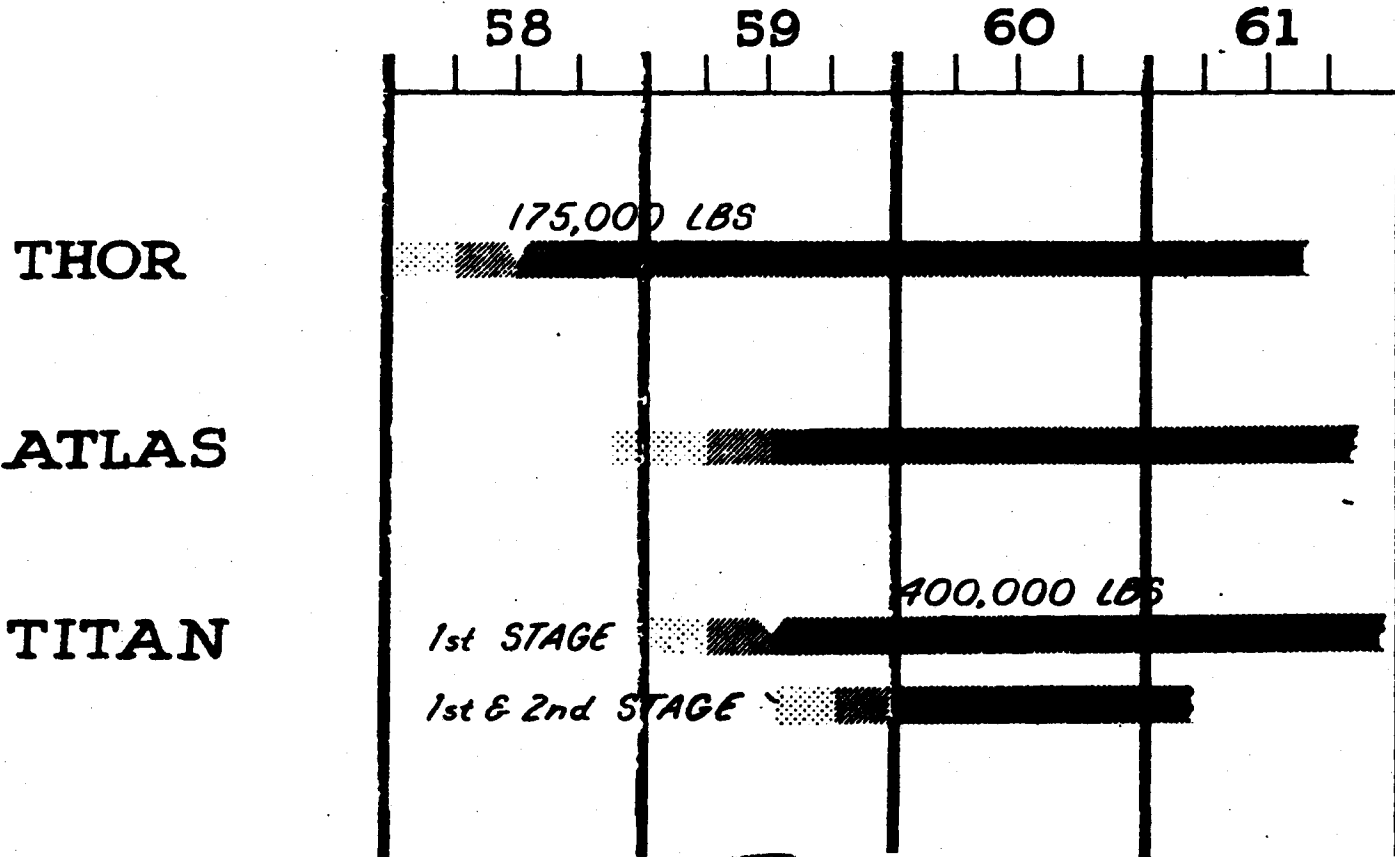

~~SECRET~~


~~CONFIDENTIAL~~



~~CONFIDENTIAL~~

# BOOSTER AVAILABILITY

## ADDED STAGE AVAILABILITY

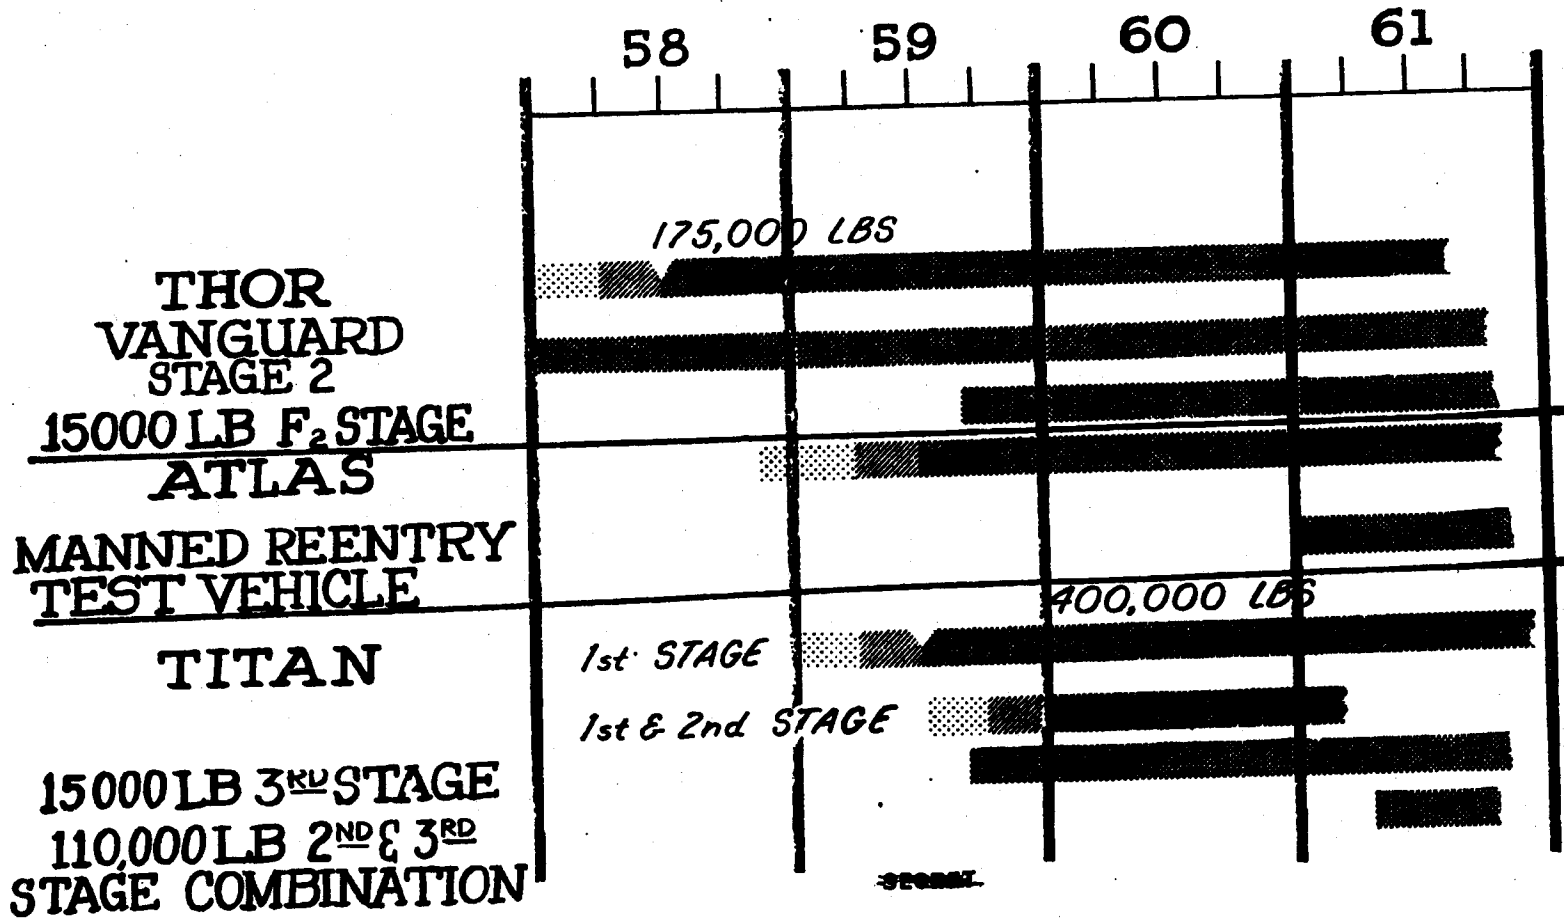

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

5027 4 841 R1

# VEHICLE COMBINATIONS APPLICABLE TO RECOMMENDED MISSIONS

## 1. RECONNAISSANCE-(117L)

THOR + VANGUARD (EARLY EXPERIMENTAL FLIGHTS)  
ATLAS + YLR-81

## 2. COMMUNICATIONS

THOR+15,000 LB. F<sub>2</sub> STAGE  
TITAN 1<sup>ST</sup> STAGE+TITAN 2<sup>ND</sup> STAGE+15,000 LB. F<sub>2</sub> STAGE  
TITAN 1<sup>ST</sup> STAGE+110,000 LB. F<sub>2</sub> +20,000 LB. F<sub>2</sub>

## 3. MANNED SPACE FLIGHT

THOR+VANGUARD (ANIMAL EXPERIMENTS; DATA GATHERING)  
TITAN 1<sup>ST</sup> STAGE+TITAN 2<sup>ND</sup> STAGE+15,000 LB. F<sub>2</sub>  
TITAN 1<sup>ST</sup> STAGE+110,000 LB. F<sub>2</sub> +20,000 LB. F<sub>2</sub>

## 4. TECHNICAL DEVELOPMENT & EXPERIMENTAL SUPPORT

ALL VEHICLES APPLICABLE AS DICTATED BY PAYLOAD REQUIREMENTS  
FOR EXAMPLE: ATLAS FOR INITIAL MANNED REENTRY TESTS

~~SECRET~~

~~CONFIDENTIAL~~

WD57-05803

~~SECRET~~  
CONFIDENTIAL

# PAYLOADS FOR SPACE MISSIONS

(INCLUDING FINAL STAGE GUIDANCE WEIGHTS)

	300 N. MI. SATELLITE*	IMPACT ON MOON*	AROUND MOON AND RETURN*	SOFT LANDING ON MOON*	AERO LANDING ON MARS**
THOR + VANGUARD STAGE 2	600 LBS	—	—	—	—
THOR F <sub>2</sub> -STAGE 2	2,800 LBS	650	400	180	240
TITAN + F <sub>2</sub> -STAGE 3	5,900 LBS	2,150	1,350	750	800
TITAN BOOSTER F <sub>2</sub> -STAGES 2 & 3	10,000 LBS	4,200	2,700	1,400	1,450

\* USING PRESENT ICBM GUIDANCE,

\*\* PRESENT ICBM GUIDANCE PROVIDED IN

\*\*\* WEIGHT OF TERMINAL GUIDANCE

DEDUCT 225 LBS. FROM THESE PAYLOADS.

~~STAGE~~ 3<sup>RD</sup> STAGE. LANDING GUIDANCE EST. AT 40 LBS.


SYSTEM MUST BE DEDUCTED.

CONFIDENTIAL

WD57-05863

~~CONFIDENTIAL~~

# LARGE MILITARY SATELLITE VEHICLE (MANNED)

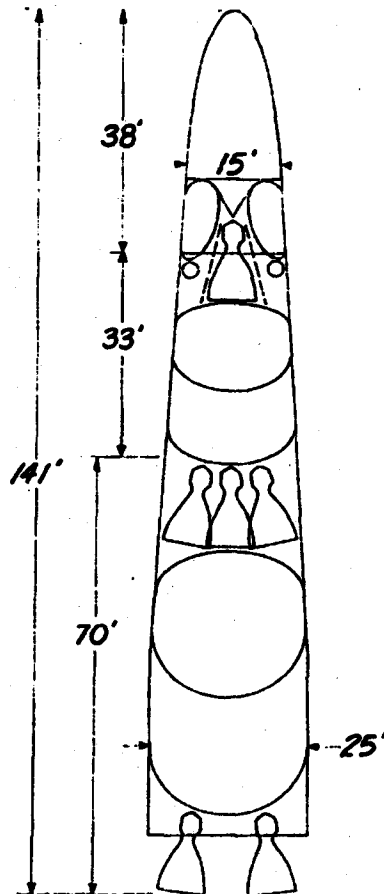

## SATELLITE STAGE

PAYLOAD IN 20,000 MI. ORBIT = 20,000 LBS.  
 RECOVERABLE PAYLOAD = 12,000 LBS.  
 GROSS WEIGHT = 40,000 LBS.

## 3RD STAGE

WEIGHT (INCLUDING LATER STAGE) = 150,000 LBS.  
 THRUST = 135,000 LBS.  
 ENGINE -  $F_2-NH_3$  OR  $F_2-N_2H_4$  WITH TURBOPUMP  
 (PRESSURIZED 80,000 LB. ENGINE PLUS TURBOPUMP)  
 THRUST CHAMBER AVAILABLE FROM PRESSURIZED ENGINE  
 ESTIMATED ENGINE DEVELOPMENT TIME - 4 YEARS  
 ESTIMATED ENGINE DEVELOPMENT COST - \$50 MILLION

## 2ND STAGE

WEIGHT (INCLUDING LATER STAGES) = 500,000 LBS.  
 THRUST = 405,000 LBS.  
 PROP. SYSTEM - THREE 135,000 LB. 3RD STAGE ENGINES  
 ( $F_2-NH_3$  OR  $F_2-N_2H_4$ )  
 ESTIMATED SYSTEM DEVELOPMENT TIME 5 YRS. TOTAL - 1YR. AFTER 3RD STAGE  
 ENGINE AVAILABLE  
 ESTIMATED SYSTEM DEVELOPMENT COST \$20 MILLION (3RD STAGE)

## 1ST STAGE


WEIGHT (INCLUDING LATER STAGES) = 1,500,000 LBS.  
 THRUST = 2,000,000 LBS.  
 ENGINE - TWO 1,000,000 LB. LOX-RP  
 (ALTERNATE - FOUR 500,000 LB. LOX-RP)  
 ESTIMATED ENGINE DEVELOPMENT TIME - 4 YRS.  
 ESTIMATED ENGINE DEVELOPMENT COST \$135 MILLION

~~SECRET~~~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

4870 10202

# AIR FORCE MILITARY SATELLITE & SPACE TECHNOLOGY PROGRAM

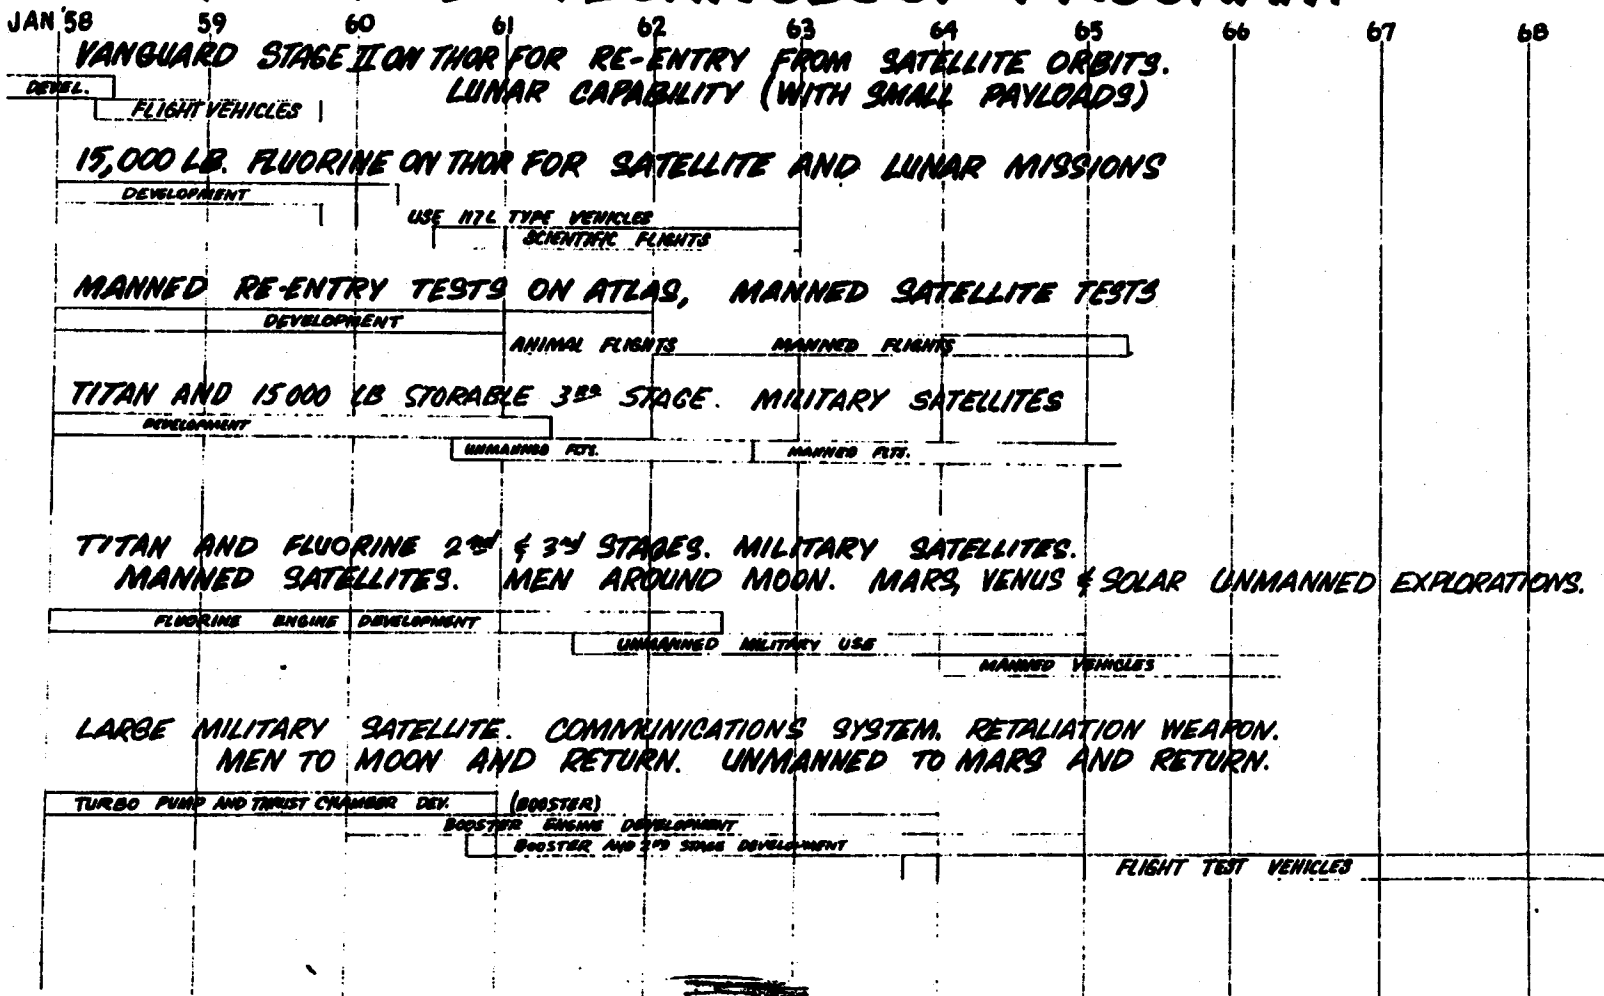

~~CONFIDENTIAL~~

WD 57-05803

~~CONFIDENTIAL~~

5022 4 036 R-1

# AF MIL. SATELLITE & SPACE TECHNOLOGY CALENDAR

JAN 58 59 60 61 62 63 64 65 66 67 68

INTERIM PROGRAM WITH THOR+VANGUARD COMPONENTS

300 N.M.I. ORBIT  
RECOVERABLE SATELLITE TESTS  
IMPACT ON MOON

EXTENDED PROGRAM WITH 4 NEW SYSTEMS

1. THOR WITH FLUORINE SECOND STAGE  
20000 MI. AROUND MARS & SOFT MARS & VENUS  
ORBIT MOON & MARS MOON VENUS  
RETRY PROBES LDNG. BCH.

2. MANNED RE-ENTRY TESTS ON ATLAS

MANNED RE-ENTRY  
MANNED SATELLITE

3. SUPER TITAN WITH FLUORINE 2ND & 3RD STAGES

SOFT MOON & VENUS LAND'G  
MARS & VENUS LAND'G  
MANNED MILITARY SATELLITE  
MEN AROUND MOON  
UNMANNED MOON LAND'G & RETURN

4. LARGE MILITARY SATELLITE

COMMUNICATIONS SATELLITE  
RECONNAISSANCE SATELLITE  
RETALIATORY WEAPONS

UNMANNED MOON LDNG & RETURN

MANNED MOON LDNG & RETURN

UNMANNED MARS LDNG & RETURN

~~CONFIDENTIAL~~

WD57-058c3

~~CONFIDENTIAL~~

## **GENERAL CONCLUSIONS**

- 1- PRESENT ATLAS, TITAN, AND THOR PROVIDE BOOSTER CAPACITY FOR SPACE MISSIONS OF PRIMARY INTEREST FOR NEXT 10 YEARS. PRINCIPAL INVESTMENT IN FIRST GENERATION SPACE VEHICLES ALREADY MADE.**
- 2- DEVELOPMENT OF A FEW ADDED STAGES OF SMALL SIZE AS "BUILDING BLOCKS" CAN PROVIDE, IN PROPER COMBINATION WITH THE BOOSTERS, VEHICLES FOR ALL SPACE MISSIONS FOR THE NEXT 10 YEARS.**
- 3- THE GUIDANCE SYSTEMS FOR PRESENT AND SECOND GENERATION ICBM AND IRBM ARE BASICALLY ADEQUATE TO PERFORM THE SPACE MISSIONS.**
- 4- DEVELOPMENT OF "PAYLOADS" FOR SOME OF THE VARIOUS MISSIONS (INCLUDING "PAYLOADS" FOR ANIMAL AND MANNED EXPERIMENTS) CAN BE DEFINED AND INITIATED NOW.**
- 5- RESEARCH AND TECHNICAL DEVELOPMENT REQUIRED ON CRITICAL PROBLEMS AND ON BASIC SPACE PHENOMENA CAN BE DEFINED AND INITIATED NOW FOR THE SECOND GENERATION OF SPACE VEHICLES AND SPACE MISSIONS.**

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

FY '58

PROGRAM for  
SATELLITE and SPACE TECHNOLOGYBasic BOOSTER:Est. EXPENDITURES

THOR

- ADAPT VANGUARD 2<sup>ND</sup> STAGE to THOR

\$ 3.0 - in Millions

THOR-TITAN

- START DEVELOPMENT of FLUORINE 2<sup>ND</sup> STAGE  
- 10,000 lb. THRUST, - PRESSURE FED ENGINE

4.0

ATLAS

- INITIATE DEVELOPMENT of MANNED RE-ENTRY  
TEST VEHICLE

2.5

TITAN

- INITIATE DEVELOPMENT of 80,000 lb.  
FLUORINE ENGINE

3.0

LARGE

- EXPAND DESIGN STUDIES for LARGE  
ENGINES

1.5

Military  
Satellite  
VEHICLE

- INITIATE DEVELOPMENT of LARGE TURBOPUMP and  
THRUST CHAMBER

2.0

TOTAL

Estimated  
FY 1958

PROGRAM EXPENDITURES

16 MILLION

~~CONFIDENTIAL~~