

LMSD-445160-B
22 February 1960

Copy No. _____
Sheets _____

REPORT CHANGE RECORD
FOR

LMSD-445160-B, SAMOS PROGRAM

The following additions, revisions, or errata corrections, should be incorporated into the document identified above. This Report Change Record page should be inserted as the first page of the affected report preceding the title page. If a page in the original document is eliminated and/or replaced by the instructions which follow, the page must be destroyed according to the Air Force directive concerning such destruction.

CONTRACT NUMBER AF 04(647)-347

ADDENDUM PAGE	REVISION		ERRATA		REVISION OR ERRATA CORRECTION (CORRECT IN INK)	FORMAL CORRECTION	
	REMOVE PAGE	INSERT PAGE	REMOVE PAGE	INSERT PAGE		REMOVE PAGE	INSERT PAGE
	2-1-14	2-1-14					

~~SECRET~~

LMSD-445160-B
1 February 1960

Copy No. _____
Sheet

~~CONFIDENTIAL~~

REPORT CHANGE RECORD
FOR

LMSD-445160-B, SAMOS PROGRAM

The following additions, revisions, or errata corrections, should be incorporated into the document identified above. This Report Change Record page should be inserted on the first page of the affected report preceding the title page. If a page in the original document is eliminated and/or replaced by the instructions which follow, the page must be destroyed according to the Air Force directive governing such destruction.

CONTRACT NUMBER AF 04(647)-347

ORIGINAL PAGE	REVISION		ERRATA		REVISION OR ERRATA CORRECTION (CORRECT IN INK)	PRODUCTION DATE INITIAL DATE
	REMOVE PAGE	INSERT PAGE	REMOVE PAGE	INSERT PAGE		
			2-1-14	2-1-14	✓ /	3/15/61 /m
			2-3-2	2-3-2		

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

~~SECRET~~

LMSD-445160-B
Revised Page
22 February 1960

2.0 VEHICLE EQUIPMENT

2.1 Systems

2.1.1 Development and Integration

2.1.1.1 Analysis and Design. The Contractor shall coordinate system analysis and design to insure the compatible integration of all subsystems into a complete vehicle system for the Samos Program. The Contractor also shall design the modification necessary to convert one of the Propulsion Test Vehicle Assemblies (PTVA's) to a Samos 2X tank configuration Facilities Checkout Vehicle suitable for use at the Samos Pt. Arguello facilities.

2.1.1.2 Inplant Test. The Contractor shall plan and coordinate inplant development, qualification, and inspection tests as described in Paragraph IV, Tab 2, Section 1 for the Samos Program. The Contractor shall determine, as accurately as possible, the environment of the satellite vehicle by means of simulated flight environment, theoretical analyses, materials studies, performance and environmental testing, and shall design proper environmental controls to enable the satellite vehicle to tolerate the environment.

2.1.1.3 Santa Cruz Test Base Tests. The Contractor shall plan, schedule, coordinate, conduct, and evaluate systems ground tests, including final acceptance testing, of the complete vehicle at the Santa Cruz Test Base.

2.1.2 Hardware

2.1.2.1 Assembly and Installation. After the fabrication and assembly of components and subassemblies, the Contractor shall stack-align the vehicle structures and complete the installation and final assembly of all subsystem hardware to provide completed vehicles in accordance with the vehicle delivery schedule, Tab 2 of this Section. The Contractor shall further modify one of the previously delivered PTVA's into a Samos 2X tank configuration Facilities Checkout Vehicle. In addition, the Contractor shall fabricate one SM-65 booster adapter for use with this Facilities Checkout Vehicle. Also the Contractor shall convert and modify an existing vehicle to a Facility Checkout Vehicle of a single tank configuration.

2.1.3 Modification and Checkout. The Contractor shall prepare checkout procedures and perform functional tests and checkout of the vehicle mechanical, propulsion, electrical, guidance and flight control, instrumentation, and communications equipment. The Contractor shall incorporate modifications and design changes required to meet the flight objectives and prepare the vehicle for shipment.

2.2 Subsystem A

2.2.1 Development

2.2.1.1 Analysis and Design. The Contractor shall provide the Samos vehicle airframe defined in Tab 2 of Section 1, and develop modifications

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

~~SECRET~~

LMSD-445160-B

6.1.1.2.2 One flight test vehicle (FTV 2) shall be ten percent through subassembly operations** at the Contractor's facility.

6.1.2 Special Test Vehicles

6.1.2.1 Two Facilities Check Vehicles described in Para. 2.1.2.1, Tab 1 of this Section shall be delivered to Vandenberg AFB.

6.2 The Contractor shall submit data as specified in the following documents:

a. LMSD-6246F, "Specification Submittal Requirements for the Discoverer, MIDAS, and Sentry Programs," dated 1 November 1959.

b. AFEM Exhibit 58-1, "Contractor Reports," dated 17 November 1958, including all amendments through 7 August 1959, with deviations as noted in Paragraph 1.2.3, Tab 1, of this Section.

c. LMSD-445087-B, "Specification Program for Satellite Systems," dated 1 November 1959.

6.3 The Contractor shall fabricate, test and furnish ground support equipment and satellite-ground control equipment required for the Samos Program which shall be capable of attaining the objectives specified in Tab 3 of Section 1. The equipment is listed in Tab 5 of this Section. This list of equipment, to be used during research and development activities, is included herein for information purposes only, since delivery of this equipment to the Government shall be accomplished only for operational use.

**Subassembly operations are exclusive of pre-mats.

2-3-2

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~CONFIDENTIAL~~

~~SECRET~~

LMSD-445160-B
11 November 1959

Copy No. ~~125~~

125 Sheets

~~CONFIDENTIAL~~

SAMOS PROGRAM

DOWNGRADED AT 12 YEAR INTERVALS;
NOT AUTOMATICALLY DECLASSIFIED
DOU DIA 5210.10

In addition to security requirements which must be met, this document is subject to special export controls, and each transmittal to foreign governments or foreign nationals may be made only with prior approval of AFSSD Code 555D.

Approved

[Signature]

**R. Smelt, Manager
Satellite Systems**

Approved

[Signature]

**E. R. Proctor, Manager
Program Administration and Control
Satellite Systems**

**LOCKHEED AIRCRAFT CORPORATION
Missiles and Space Division
Sunnyvale, California**

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, U. S. C., Sec. 793 and 794, its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

**DDC CONTROL
NO. 6C855**

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~CONFIDENTIAL~~

~~SECRET~~

LMSD-445160-B

FOREWORD

The information contained in this document constitutes the definition of the Samos Program as of 24 August 1959.

Section 1 sets forth the objectives of the total Samos Program, and therefore, is not confined to any specific funding period. These objectives, which establish the goals toward which effort will be directed, are described for the areas of system requirements, satellite vehicle, ground equipment, facilities, personnel, logistics, and launch plan.

Section 2 presents the work statement for that part of the total Samos Program to be accomplished during the period between the completion of the Samos portion of Contract AF 04(647)-97 and 31 March 1961. This section consists of the statement of work, schedule, summary of items to be furnished, Government-furnished items, and ground equipment.

ii

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

CONTENTS

SECTION 1	PROGRAM OBJECTIVES
TAB 1	SYSTEM REQUIREMENTS
TAB 2	SATELLITE VEHICLES
TAB 3	GROUND EQUIPMENT
TAB 4	FACILITIES
TAB 5	PERSONNEL
TAB 6	LOGISTICS
TAB 7	LAUNCH PLAN
SECTION 2	WORK STATEMENT
TAB 1	STATEMENT OF WORK
TAB 2	SCHEDULE
TAB 3	SUMMARY OF ITEMS TO BE FURNISHED
TAB 4	GOVERNMENT-FURNISHED ITEMS
TAB 5	GROUND EQUIPMENT

~~SECRET~~

LMSD-445160-B

SYSTEM REQUIREMENTS

I. SCOPE

A. GENERAL. The requirements for the Samos Program, using Agena vehicles as the carriers for reconnaissance equipment, are established in this tab. The development program and overall operational characteristics of the system may be described as follows:

1. DEVELOPMENT PROGRAM

a. The Samos Program shall provide a satellite reconnaissance system capable of obtaining reconnaissance information which can be integrated into the USAF intelligence data handling system and disseminated to operational military agencies. The Samos Program, employing orbiting satellites composed of Agena vehicles and reconnaissance payloads, shall provide surveillance of areas of interest, enabling evaluation of intention to attack. Timeliness of receipt of the intelligence information with daily reconnaissance coverage of high resolution is the ideal. In consideration of the requirement for earliest availability of the Samos system, the engineering progression and Air Force acceptance shall be from the lesser to the greater resolution. The research and development effort shall be directed toward providing equipment which shall permit the following:

- (1) Coverage of world-wide areas of interest
- (2) Detecting new and hitherto unknown targets
- (3) Determining electronic signal characteristics
- (4) Locating and verifying targets and defenses
- (5) Collecting data on technological progress
- (6) Evaluating military and industrial strength
- (7) Monitoring electronic emissions
- (8) Observing enemy build-up indications

1-1-1

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

- (9) Evaluating attack capability
- (10) Assessing damage from high-yield weapons
- (11) Reconnoitering military movements
- (12) Locating naval forces throughout the world.

b. The Samos Program shall continue over a period of years and include a variety of configurations, capabilities, and useful satellite life spans. The development of the reconnaissance system shall proceed from a relatively simple design to more refined versions capable of meeting stated system requirements. The original design and subsequent development work shall endeavor to keep the basic system design as flexible as possible to provide a relatively rapid reaction to changing requirements. The development program shall include, besides the satellite vehicle and its attendant equipment, development of visual and ferret equipment to provide reconnaissance information, and development of the ground based satellite control system equipment necessary for the collection control of the orbiting vehicles. This equipment shall provide a reconnaissance capability of two modes: readout and recovery.

(1) READOUT

(a) VISUAL RECONNAISSANCE. The reconnaissance equipment for the visual reconnaissance readout portion of the Samos Program consists of the satellite-borne equipment required to collect information in the visible spectrum, to process and store this information, and on a command signal from the ground to convert stored images to appropriate signals for transmission to the ground. In addition to the satellite-borne equipment, related ground-based equipment shall be required to take the output of the satellite-borne data link and reconstitute the signal into photographic form for system control purposes, vehicle equipment adjustment, engineering evaluation, and for further processing and intelligence use. Initial visual equipment shall be capable of resolving targets 20 feet in size, and development shall continue toward the goal of achieving resolutions of 5 feet or less. Target location shall have an error no greater than ± 1 mile with respect to the North American Datum. Future consideration shall be given to the use of electrostatic sensors and high-resolution television in conjunction with magnetic tape storage. The vehicle-borne and ground-based equipment shall consist of and be capable of the following functions:

(i) VEHICLE CAMERA. The reconnaissance camera shall be capable of providing photographic coverage for the useful reconnaissance life of the vehicle. Means shall be provided to

1-1-2

~~SECRET~~

~~SECRET~~

LMSD-445160-B

perform necessary camera adjustments by command signals from the ground stations. The film-drive mechanism shall be capable of being controlled by the programmer on the basis of command signals originating from the ground. A means for indexing the film with time-base information shall be included to assist in providing positional accuracy to ± 1 mile for the overall system. The camera will operate on an intermittent basis dependent upon orbital period and orientation. The film supply shall be sufficient to meet the reconnaissance requirements plus serving as leader when required.

(ii) VEHICLE PROCESSOR. The film processor together with its associated equipment shall be capable of processing and drying the film in the satellite vehicle.

(iii) VEHICLE READOUT. The vehicle readout mechanism shall, on receipt of command signals, be capable of scanning the processed film and generating an output signal from the video amplifier compatible with the reconnaissance data link. The composite video signal output of the readout equipment shall include synchronizing, blanking, and other information as required to record and process the visual data on the ground.

(iv) VEHICLE CONTROL AND TRANSPORT EQUIPMENT. The control, transport, and storage equipment shall be capable of executing the command signals provided by the vehicle programmer and command control communications. The functions to be executed shall include, but not be limited to, maintaining correct image motion compensation (IMC) in the camera and supplying programmed or commanded changes to IMC; exposure control and focus operations; film transport functions from the camera through the readout device; operation and sequencing of the film processing and drying; monitoring performance of the readout equipment; and control and sequencing of payload gimbaling mechanism.

(v) GROUND RECONSTRUCTION EQUIPMENT AND MONITOR (PRIMARY RECORD). The ground photo reconstruction and processing equipment shall be capable of converting the video signal received from the data link into photographic form and of monitoring the vehicle readout and ground reconstruction equipment. The primary record formed in the above operation will contain the reconnaissance image plus the auxiliary data, and the monitor will provide the means for checking the performance of critical components in the system and for initiating command control of the process.

1-1-3

~~SECRET~~

LOCKHEED AIRCRAFT CORPORATION

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

(b) FERRET RECONNAISSANCE. The ferret reconnaissance portion of the Samos Program consists of the satellite-borne equipment required to collect information from radiation in certain selected regions of the electromagnetic spectrum, to store this information, to filter or index it as may be necessary, and at the proper time to convert the stored information into an appropriate electrical signal for transmission to the ground. Ground-based equipment shall be required for inflight calibration and vehicle equipment adjustment; engineering evaluation of vehicle equipment performance, and transmission of reconnaissance, calibration, attitude, and time information to the data processing activities.

(2) RECOVERY. The recovery portion of the Samos Program shall provide a payload which will be designed to obtain high-resolution photographic reconnaissance and shall be capable of achieving 5 foot resolution. The data shall be returned to the earth in a recovery capsule ejected from the satellite vehicle.

2. OVERALL OPERATIONAL CHARACTERISTICS

a. The Samos Program shall utilize satellite vehicles, modified ICBM boosters, launch facilities, tracking facilities, and a complex communication and data processing network with related facilities. The ICBM booster provides the primary propulsive power to the Samos satellite vehicle. Separation occurs on attainment of the proper altitude and attitude. As the booster falls away, the satellite vehicle continues in a self-stabilized, predetermined coast to a programmed altitude. Orbital altitudes shall be selected according to mission requirements. At the termination of the coast phase, the satellite orbital boost engine activates, supplying the orbital velocity increment required to establish a substantially circular orbit. The internal controls shall then orient the vehicle to the proper attitude. The most common orbits shall pass within a few degrees of the poles. The vehicle shall complete a revolution of the earth at approximately 94-minute intervals. Because the orbit is essentially fixed in space, while the earth rotates inside it, successive passes over the earth's surface will be displaced slightly more than $22-1/2^\circ$ at the equator. This offsetting will permit a single vehicle to observe the entire earth in a total time period which depends, in part, on the width of the swath observed.

b. The satellite vehicle equipment used in the readout portion of the Samos Program will be programmed by a secure ground-space communication link to activate and deactivate visual or electronic sensing equipment over the target area in accordance with operating requirements. When within range of a Samos ground receiving station, the vehicle shall, upon command, transmit the recorded data. These

1-1-4

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

data will be received, processed, and transmitted to the using agencies. Useful operations will be terminated when air drag changes the orbit sufficiently to prevent operations, or when either the electrical power supply is exhausted or a failure of equipment takes place. Expected useful life for early versions of the readout satellite vehicle is about 10 to 30 days. Expected useful life for later versions of the readout satellite vehicle is more than a year for ferret reconnaissance equipment and 3 to 12 months for visual reconnaissance equipment.

c. The satellite vehicle equipment used in the recovery portion of the Samos Program shall be programmed to provide high-resolution photo reconnaissance of specific areas of interest. For positioning the satellite vehicle as required to obtain data on specific areas of interest, the orbital period may be adjusted by ground command during the high-resolution flights. Upon recovery, the exposed film shall be transported to the processing and using agencies. Useful operations will be terminated upon command or upon the exhaustion of the film or the electrical power supply. Expected useful life for the high resolution payload is approximately 15 days.

d. The re-entry and recovery sequence of operations may be initiated by the vehicle timer or by ground command. The recovery capsule shall be ejected from the satellite vehicle and propelled in an appropriate re-entry trajectory for air-recovery in the ocean area adjacent to Hawaii. While only over-water recovery is planned herein, the satellite vehicle, recovery capsule, and airborne recovery components and equipment shall be designed to allow for over-land recovery within the United States Zone of Interior if required. At the proper altitude a parachute system shall be deployed. Simultaneously, the recovery capsule radio beacon and light beacon shall begin operating. Aircraft specially equipped with direction finder systems and air recovery gear will detect, locate, and accomplish air recovery of the capsule. If over-water air recovery fails, surface vessels, similarly equipped with direction-finder systems, will recover the capsule from the sea with the assistance of helicopters.

B. PROGRAM OBJECTIVES

1. **READOUT.** The objective of the readout portion of the Samos Program shall be to:

a. Develop and demonstrate the equipment techniques and procedures for launching the Samos readout vehicles in combination with the Atlas (SM-65) boosters

b. Demonstrate capability of attaining orbit utilizing Samos readout vehicles in combination with Atlas (SM-65) boosters

~~SECRET~~

LMSD-445160-B

- c. Develop the equipment for and demonstrate the effectiveness of satellite-borne photographic techniques, including the photographic coverage of specific areas of interest, film processing and storage, and electronic space-ground transmission of visual data
- d. Develop the equipment for and demonstrate the effectiveness of satellite-borne electronic reconnaissance techniques, including ferret coverage of specific areas of interest, electronic data storage, and space-ground transmission of ferret data
- e. Develop the equipment for and demonstrate the capability of the orbital attitude system to meet the needs of the readout portion of the Samos Program
- f. Develop and demonstrate the equipment, techniques, and procedures for ground-based acquisition, tracking command, and data processing and reconstruction for system control and technical evaluation
- g. Develop the equipment for and demonstrate the incremental orbital period adjustment techniques
- h. Demonstrate system operating techniques and procedures
- i. Develop the equipment for and demonstrate the capability for utilizing solar voltaic collector auxiliary power in satellite reconnaissance vehicles
- j. Carry out research leading to the development of all-electronic visual equipment suitable for satellite reconnaissance
- k. Develop visual reconnaissance equipment capable of 5-foot ground resolution
- l. Develop the capability for utilizing high-energy battery auxiliary power in satellite reconnaissance vehicles
- m. Develop the capability for utilizing nuclear auxiliary power in satellite reconnaissance vehicles
- n. Develop additional capabilities for extending the coverage of the ferret reconnaissance equipment
- o. Assess feedback information from the data user to the satellite ground control system for design improvement and system control

1-1-6

~~SECRET~~

~~SECRET~~

LMSD-445160-B

p. Consideration will be given to the application of restart engine capability and optimized propellant-carrying capacity, developed in the Discoverer Program, to the Samos vehicle in order to provide for more diversified system capabilities.

2. RECOVERY. The objectives of the recovery portion of the Samos Program shall be to:

- a. Develop and demonstrate the equipment, techniques, and procedures for launching the Samos recovery vehicles in combination with the Atlas (SM-65) boosters
- b. Demonstrate capability of attaining orbit utilizing Samos recovery vehicles in combination with Atlas (SM-65) boosters
- c. Develop the equipment for and demonstrate the capability of the orbital attitude system to meet the needs of the recovery portion of the Samos Program
- d. Develop the equipment for and demonstrate capsule recovery capability by ejecting a capsule from orbit, propelling it into an appropriate descent trajectory, and recovering it by air snatch techniques
- e. Demonstrate system operating techniques and procedures
- f. Develop the equipment for and demonstrate the use of the Samos recovery vehicles to accomplish extremely high resolution reconnaissance photography of specific areas of interest
- g. Demonstrate the incremental orbital period adjustment techniques
- h. Develop and demonstrate the equipment, techniques, and procedures for the satellite ground control system to provide for acquisition, tracking, command, scheduling, recovery control, and data processing for system control and technical evaluation
- i. Assess feedback information from the data user to the satellite ground control system for design improvement and system control
- j. Consideration will be given to the application of restart engine capability and optimized propellant-carrying capacity, developed in the Discoverer Program, to the Samos vehicle in order to provide for more diversified system capabilities.

1-1-7

~~SECRET~~

LOCKHEED AIRCRAFT CORPORATION

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

C. FLIGHT MISSIONS. Flight missions shall be defined as those goals toward which each test flight shall be planned and toward which system development effort shall be directed. The flight missions for the Samos Program shall be as specified in Tables I and II of this tab.

D. ACTUAL ORBITAL LIFE. Actual orbital life shall be defined as that period of time that the orbital stage vehicle remains in orbit from injection to natural or induced decay. The desired actual orbital life shall be of sufficient duration to insure a reasonable probability of successful accomplishment of the test objectives.

E. ACTIVE ORBITAL LIFE. Active orbital life shall be defined as that period of time on orbit during which useful data is obtained. It is a design objective that the equipment operating on orbit shall be capable of maintaining failure-free operation during the active orbital life period to the extent specified in LMSD-427102B, "Reliability Requirements for the Samos Program," dated 1 November 1959. The desired active orbital life will vary with individual missions and will be specified in documents pertaining to individual missions, but will not be greater than that indicated in Table I, Tab 2 of this Section.

II. DESIGN CRITERIA

A. PUBLICATIONS. Contractor publications, specifications, drawings, and other documents, with Air Force approval, shall be used in the Samos Program as indicated in Tabs 2 through 6 of this Section.

III. SYSTEM DESCRIPTION

A. TEST VEHICLES

1. BOOST VEHICLES. Atlas missiles (SM-65) to be used in modified form as the boosters for the Samos test flights shall be supplied, together with necessary ground support units, as Government-furnished equipment items. The Atlas configuration shall not include the nose cone but shall include the guidance and appropriate ground equipment such as that used with the "D" Atlas series. The booster and ground equipment shall be modified to make it compatible with the satellite vehicle requirements described in Tab 2 of this Section. Booster performance requirements shall be in accordance with Table III of this tab.

2. SATELLITE VEHICLE. The Samos satellite vehicles shall be designed in four basic configurations for the readout portion of the Samos Program and in one basic configuration for the recovery portion of the Samos Program as defined in Tab 2 of this Section. Differences

1-1-8

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

between vehicles shall consist of those changes necessary to satisfy the technical requirements of the Samos Program objectives. For the read-out portion of the Samos Program the satellite vehicle shall consist of the Agena vehicle and payloads as follows:

a. AGENA

- (1) Airframe (Subsystem A)
- (2) Propulsion (Subsystem B)
- (3) Auxiliary Power (Subsystem C)
- (4) Guidance and Control (Subsystem D)
- (5) Vehicle-borne Communications (Subsystem H).

b. PAYLOAD

- (1) Visual Reconnaissance (Subsystem E)
- (2) Ferret Reconnaissance (Subsystem F).

For the recovery portion of the Samos Program the satellite vehicle shall consist of the Agena vehicle and payloads as follows:

a. AGENA

- (1) Airframe (Subsystem A)
- (2) Propulsion (Subsystem B)
- (3) Auxiliary Power (Subsystem C)
- (4) Guidance and Control (Subsystem D)
- (5) Vehicle-borne Communications (Subsystem H).

b. PAYLOAD

- (1) Recovery Capsule (Subsystem L)
- (2) Visual Reconnaissance (Subsystem E).

1-1-9

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

B. GROUND EQUIPMENT

1. **GROUND SUPPORT EQUIPMENT.** Ground support equipment shall be defined as any or all non-vehicle-borne implements or devices which are required to inspect, test, adjust, calibrate, appraise, gage, measure, repair, overhaul, assemble, disassemble, service, transport, safeguard, record, store, actuate, or otherwise perform a function in support of the Samos satellite vehicle. This equipment includes ground handling equipment, ground servicing equipment, launch monitor and control equipment, vehicle subsystem and vehicle system checkout equipment as described in Tab 3 of this Section.

2. **SATELLITE GROUND CONTROL EQUIPMENT.** Satellite ground control equipment shall include all ground equipment necessary to provide for centralized system control for the launched vehicles and for the orbiting satellites. This includes a ground-based communications equipment and all non-vehicle-borne specialized equipment required to command, transmit, receive, check out and test, record, analyze, process, store, decode indexed information, display, safeguard, or otherwise perform functions at tracking, acquisition and readout sites and at control centers immediately subsequent to launch and throughout the satellite's orbiting life. This equipment includes VERLORT radar equipment, VHF acquisition and tracking equipment, ground control and display equipment, data handling and computation equipment, VHF data receiving equipment, UHF acquisition and tracking equipment, UHF data receiving equipment, UHF command transmitting equipment, payload ground equipment, ground timing and display equipment, intra/interstation communications and data transmission equipment, alignment and calibration equipment, and miscellaneous equipment as described in Tab 3 of this Section.

C. TEST OPERATIONS

1. **SANTA CRUZ TEST BASE.** The Santa Cruz Test Base shall provide test operations involving the capability of testing components, subsystems, and satellite vehicles including engine firing, as required for development and acceptance testing.

2. **LAUNCH BASE, VANDENBERG AFB, CALIFORNIA.** All satellite vehicles of the Samos Program shall be launched from Vandenberg AFB - Point Arguello. Base test operations shall include:

- a. Vehicle assembly (assemble major components)
- b. Vehicle subsystem and system checkout, modification,
and repair
- c. Countdown, monitor, and launch.

1-1-10

~~SECRET~~

~~SECRET~~

LMSD-445160-B

Base facilities and ground equipment will be provided in accordance with the requirements established in Tabs 3 and 4 of this Section.

3. TRACKING AND ACQUISITION STATIONS. Seven tracking and acquisition stations shall be used for the Samos Program and shall be located as follows:

- a. Vandenberg AFB, California
- b. Kaena Point, Hawaii
- c. New Boston, New Hampshire
- d. Ottumwa, Iowa
- e. Fort Stevens, Oregon
- f. Point Mugu, California
- g. Kodiak Island, Alaska.

Each station shall have the capability to acquire, track, and command the satellite vehicle and to receive telemetry and reconnaissance read-out data transmitted from the vehicle except:

- a. Kaena Point shall have no reconnaissance data read-out capability
- b. Point Mugu will be used for launch tracking and ascertain telemetry only
- c. Kodiak Island will be used for VERLORT tracking only
- d. Vandenberg AFB shall have added VHF telemetry capability to provide real time telemetry data displays and recordings for the Atlas booster during the boost phase.

Facilities and equipment shall conform to the requirements of Tabs 3 and 4 of this Section.

4. TELEMETRY SHIP. A ship equipped with manually trained antennas and telemetry receiving and recording equipment and with ferret inflight calibration equipment shall be used to obtain telemetry data and to perform inflight calibration of ferret equipment. The ship shall be stationed at appropriate position to receive telemetry data transmitted from the satellite vehicle. The facilities and equipment shall conform to the requirements of Tabs 3 and 4 of this Section.

1-1-11

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

5. SPACE TRACK TRACKING STATIONS. The facilities of Space Track shall be utilized to provide additional data on vehicle orbital position during the recovery portion of the Samos Program. The positional data derived from Space Track optical tracking activities shall be integrated into the computations undertaken for high-accuracy determination of vehicle orbital position.
6. DEVELOPMENT CONTROL CENTER, SUNNYVALE. Samos flight test operations shall be centrally controlled and directed from the Development Control Center. The Development Control Center is the hub of the communications network and is the focal point for all systems status and control preceding and during launch operations. Also, the Center, including the computer facilities, provides for centralized system control for the orbiting satellites and centralized collection control for the sensor equipments. This Center shall conform to the requirements of Tabs 3 and 4 of this Section.
7. VANDENBERG CONTROL CENTER. Launch and orbit injection operations at the launch base, the tracking and acquisition stations at Vandenberg AFB and Point Mugu, and the telemetry ship shall be monitored and coordinated by the Vandenberg Control Center. Operations at the launch pad will be under specific control and direction from the blockhouse. The equipment of the Vandenberg Control Center shall conform to the requirements of Tab 3 of this Section.
8. HAWAIIAN CONTROL CENTER. The Hawaiian Control Center located at Hickam AFB, Hawaii, shall dispatch and control air and sea elements of the recovery force during recovery operations in the area of the Hawaiian Islands. This Center shall be equipped with necessary communications to permit real-time command and control of both the airborne and seaborne elements of the recovery force. The Hawaiian Control Center shall conform to the requirements of Tabs 3 and 4 of this Section.
9. RECOVERY FORCE. It is planned that the recovery force shall consist of a minimum of four aircraft and two naval vessels. Both the aircraft and the naval vessels shall be equipped with 360° search, long-range direction-finding equipment. The aircraft shall also be equipped with air snatch equipment that can be deployed during flight at the aircraft's cruising speed. This recovery force shall be assigned to the Hawaiian Control Center for recovery operations in the vicinity of the Hawaiian Islands. Helicopters will be carried by the surface vessels to accomplish visual search in case of water impact.
10. USAF WEATHER FORECASTING. The USAF weather forecasting service will provide up-to-date estimates of the weather conditions

1-1-12

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

existing at the targets to be photographed by the Visual Recovery Reconnaissance system.

11. LAUNCH OPERATIONS CONTROL CENTER

D. SYSTEMS SUPPORT

1. PERSONNEL. Contractor-furnished personnel shall be assigned to all facilities listed above except for the Space Track optical tracking stations, the recovery force, and launch operations control center. A personnel selection and training program shall be planned and conducted as outlined in Tab 5 of this Section, so that all Contractor-furnished personnel will be qualified for the jobs assigned.

2. LOGISTICS. A logistic support program shall be developed and implemented so that the Samos Program shall be adequately supported through the provision of stocks of equipment, material, and spare parts, and through the establishment of maintenance facilities as outlined in Tab 6 of this Section.

IV. TESTING REQUIREMENTS

A. FLIGHT TESTING. Each satellite vehicle shall be flight tested at Vandenberg AFB, using the facilities described above. Prior to each flight, test planning documents shall be prepared. The test objectives shall consist of three categories which are defined as follows:

1. PRIMARY OBJECTIVES. Those flight test objectives which are essential to and which contribute directly to the fulfillment of the program objectives shall be termed primary objectives. Any tendency toward malfunction of equipment, deterioration of weather conditions, or change of range status that could in any manner jeopardize the accomplishment of a primary objective shall be sufficient justification to delay the test. Any malfunction of test vehicle or ground equipment shall constitute grounds for holding, recycling, or terminating the launch countdown.

2. SECONDARY OBJECTIVES. Those flight test objectives which are highly desirable, but are not essential to the fulfillment of the program objectives, shall be termed secondary objectives. If the accomplishment of any secondary objective appears to be in jeopardy

1-1-13

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

at any time prior to initiation of the booster automatic launch sequence, as determined by the Flight Test Controller, the countdown may be held or recycled to resolve the difficulty.

3. TERTIARY OBJECTIVES. Those flight test objectives which contribute to design research, environmental research, associated projects, or other supporting engineering effort shall be termed tertiary objectives. There shall be no delay, hold, or recycling of a countdown to assure accomplishment of a tertiary objective. Launch schedule rearrangements to favor the achievement of a tertiary objective shall be considered desirable when, in the opinion of the Flight Test Controller, such rearrangements can be tolerated.

B. GROUND TESTING

1. SATELLITE VEHICLE TESTING. Satellite vehicle acceptance testing, including engine firing, shall be performed on each of the satellite vehicles to provide an accurate final checkout of the complete vehicle. These tests shall be conducted in accordance with the test specifications applicable to each vehicle as described in LMSD-445087-B, "Specification Program for Satellite Systems," dated 1 November 1959.

2. SATELLITE GROUND CONTROL TESTS. Satellite ground control tests shall be conducted as necessary to assure the functional effectiveness of the control and communications networks between and within tracking, acquisition, and readout stations, launch bases, and control centers; the data links; telemetry and reconnaissance data handling, system status, and display equipment; and the computer facilities.

V. RELIABILITY REQUIREMENTS

A. RELIABILITY OBJECTIVE. Reliability of the Samos Program shall satisfy the following objective:

1. The average output of the system, the output being measured at the point of issue of the reconnaissance information from the ground processing station, shall not be reduced by the effects of equipment unreliability by more than the amounts specified in LMSD-427102-B, "Reliability Requirements for the Samos Program," dated 1 November 1959.

1-1-14

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

TABLE I
FLIGHT MISSIONS (READOUT)

The flight missions of the readout portion of the Samos Program are distinguished by progressive advance in technology toward a system for readout of high resolution photo and advanced ferret reconnaissance data. These missions have been established as follows:

FLIGHT MISSION I (Dual Payload)

1. Demonstrate the ability of the Samos/Atlas combination to place the satellite vehicle on a planned orbit.
2. Demonstrate the ability of the satellite vehicle to achieve and maintain a predetermined attitude orientation on orbit.
3. Utilizing E-1 visual equipment, read out pre-exposed and pre-processed film, process and read out pre-exposed film, and perform total subsystem operation within the capability limits imposed by the dual payload configuration.
4. Utilizing the F-1 ferret equipment, monitor electromagnetic emissions, quantize and store significant characteristics of these emissions, and read out these data via the vehicle-ground communication link to evaluate ferret reconnaissance techniques.
5. Test and evaluate the basic subsystems comprising the satellite vehicle.
6. Test and evaluate the capability of the ground equipment and facilities to support the satellite vehicle in its prelaunch, launch, ascent, and orbital phases.
7. Collect, record, and transmit telemetered data.
8. Demonstrate the capability of the satellite ground control system to maintain control of system operations.

FLIGHT MISSION II (Dual Payload)

1. Demonstrate the ability of the Samos/Atlas combination to place the satellite vehicle on a planned orbit.
2. Demonstrate the ability of the satellite vehicle to achieve and maintain a predetermined attitude orientation on orbit.

1-1-15

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

3. Utilizing the E-1 visual equipment, read out pre-exposed and pre-processed film, process and read out pre-exposed film, and perform total subsystem operation within the capability limits imposed by the dual payload configuration.
4. Utilizing the F-2A ferret equipment, monitor electromagnetic emissions, quantize and store significant characteristics of these emissions, and read out these data via the vehicle-ground communication link to evaluate ferret reconnaissance techniques.
5. Test and evaluate the basic subsystems comprising the satellite vehicle.
6. Test and evaluate the capability of the ground equipment and facilities to support the satellite vehicle in its prelaunch, launch, ascent, and orbital phases.
7. Collect, record, and transmit telemetered data.
8. Demonstrate the capability of the satellite ground control system to maintain control of system operations.

FLIGHT MISSION III (Medium-Resolution Photo Reconnaissance)

1. Demonstrate the ability of the Samos/Atlas combination to place the satellite vehicle on a planned orbit.
2. Demonstrate the ability of the satellite vehicle to achieve and maintain a predetermined attitude orientation on orbit.
3. Utilizing the E-2 visual reconnaissance equipment, demonstrate the ability to photograph specific areas of interest, process the exposed film, and electronically sense and read out the information via the vehicle-ground communications link.
4. Test and evaluate a vehicle auxiliary power system, which incorporates solar voltaic collectors, primary, and secondary batteries.
5. Test and evaluate the basic subsystems comprising the satellite vehicle.
6. Test and evaluate the capability of the ground equipment and facilities to support the satellite vehicle in its prelaunch, launch, ascent, and orbital phases.

1-1-16

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

7. Demonstrate the capability of the satellite ground control system to maintain control of multiple satellite operation.

8. Evaluate orbital period adjustment, control, and computing systems.

FLIGHT MISSION IV (Ferret Reconnaissance)

1. Demonstrate the ability of the Samos/Atlas combination to place the satellite vehicle on a planned orbit.

2. Demonstrate the ability of the satellite vehicle to achieve and maintain a predetermined attitude orientation on orbit.

3. Utilizing the F-2B, F-3A, and F-3B ferret equipment, in flight vehicles of Configuration IV monitor electromagnetic emissions, quantize and store significant characteristics of these emissions, record special signals by analog methods, and read out the data via the vehicle-ground communication link to evaluate ferret reconnaissance equipment.

4. Test and evaluate a vehicle auxiliary power system which incorporates solar voltaic collectors, primary, and secondary batteries.

5. Evaluate orbital period adjustment, control, and computing systems.

6. Test and evaluate the basic subsystems comprising the satellite vehicle.

7. Test and evaluate the capability of the ground equipment and facilities to support the satellite vehicle in its prelaunch, launch, ascent, and orbital phases.

8. Demonstrate the capability of the satellite ground control system to maintain control of multiple satellite operation.

9. Obtain and process geophysical data.

1-1-17

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

TABLE II
FLIGHT MISSIONS (RECOVERY)

The flight mission of the recovery portion of the Samos Program is designed to obtain high resolution photographic information.

FLIGHT MISSION I (High-Resolution Surveillance)

1. Demonstrate the ability of the Samos/Atlas combination to place the satellite vehicle on a planned orbit.
2. Demonstrate the ability of the satellite vehicle to achieve and maintain a predetermined attitude orientation on orbit.
3. Evaluate precise vehicle position and attitude determination techniques.
4. Test and evaluate a vehicle auxiliary power system which incorporates solar voltaic collectors, primary, and secondary batteries.
5. Test and evaluate the capability of the camera system to provide high-resolution photographic coverage of specific areas of interest.
6. Test capsule separation, retrodynamics, thermal protection, and recovery techniques.
7. Evaluate orbital period adjustment, control, and computing systems.
8. Demonstrate the capability of the satellite ground control system equipment and facilities to control system operations, and to collect, record, and assess telemetered data.

1-1-18

~~SECRET~~

TABLE III

ATLAS (SM-65) BOOSTER PERFORMANCE REQUIREMENTS

The Atlas missile furnished by the Government shall have a minimum booster exit performance as established by the following parameters. This performance is based upon a launch gross weight of the satellite vehicle limited to 11,600 pounds.

Thrust (lb)	<u>Sustainer</u>	<u>Booster</u>	<u>Each Vernier</u>	
			<u>Pump Fed</u>	<u>Tank Fed</u>
	56,713 ± 3%	308,366 ± 3%	1000 ± 3%	985 ± 3%
Specific Impulse (minimum)	215	245	220	214

- 3σ Variation in required nominal apogee altitude ± 6000 feet
- 3σ Variation in required nominal apogee velocity ± 5 feet per second or less
- 3σ Variation in required nominal orbit plane inclination ± 0.5 degree

1-1-19

~~SECRET~~

LMSD-445160-B

SATELLITE VEHICLES

I. SCOPE

A. GENERAL. The performance requirements of the satellite vehicles comprising the space-borne test platforms to be used in exploiting the technical capabilities of the Samos Program are established in this tab.

B. DESIGN OBJECTIVE. The basic objective of the satellite vehicle shall be to achieve the flight mission capability defined in Tab I of this Section. The satellite vehicle shall be designed in four basic configurations for the readout portion of the Samos Program and one basic configuration for the recovery portion of the Samos Program. The design will satisfy the requirements of Table I, Nominal Performance, and Table II, Flight Missions and Configurations, of this tab.

II. DESIGN CRITERIA

A. PUBLICATIONS. The following publications shall be used in the design of the satellite vehicles for the Samos Program:

1. MILITARY. The following military specification shall be used as a guide:

a. MIL-1-26600 (USAF), "Interference Control Requirements, Aeronautical Equipment," dated 2 June 1958.

2. LOCKHEED MISSILES AND SPACE DIVISION

a. Compliance with the following Contractor specifications shall be required.

(1) LMSD-6224, "Airframe Subsystem Specification (SM-65 and Battery Auxiliary Power)," Revision D, dated 26 May 1959; Amendment 1, dated 15 July 1959.

(2) LMSD-423965, "Airframe Subsystem Specification (SM-65 and Solar Power), MIDAS Program," Revision B, dated 26 May 1959; Amendment 1, dated 15 July 1959; Amendment 2, dated 30 July 1959

1-2-1

~~SECRET~~

~~SECRET~~

LMSD-445160-B

(3) LMSD-6161, "Propulsion Subsystem Specification (UDMH Configuration - Single Burn)," Revision B, dated 27 July 1959

(4) LMSD-2959, "Model Specification, Engine, Rocket, Liquid Propellant, USAF Model XLR-81-BA-5," Revision A, dated 31 March 1959

(5) LMSD-416095, "Specification for Solid Propellant Rocket Motor, 20KS-120," dated 25 February 1959; Amendment 1, dated 30 July 1959

(6) LMSD-6226, "Subsystem C Battery Auxiliary Power Supply Specification (Atlas Configuration)," Revision B, dated 25 February 1959

b. The following specifications will become compliance requirements upon completion or revision by LMSD and subsequent approval by the Air Force.

(1) LMSD-445043, "Subsystem A Specification, Samos R2 Program"

(2) LMSD-445865, "Subsystem B Specification, Extended Burn and Orbital Period Control"

(3) LMSD-424816, "Model Specification, Engine, Rocket, Liquid Propellant, BAC Model 8081"

(4) LMSD-445868, "Orbital Velocity Adjustment System Specification"

(5) LMSD-423966, "Subsystem C Solar Auxiliary Power Supply Specification (Atlas Configuration)"

(6) LMSD-445885, "Guidance and Control Subsystem Specification for Samos Vehicle Configurations I and II"

(7) LMSD-445866, "Guidance and Control Subsystem Specification for Samos Vehicle Configurations III and IV"

(8) LMSD-445117, "Guidance and Control Subsystem Specification, R2 Program"

(9) LMSD-6229, "Subsystem E Specification for E-1 (Component Test) Payload"

(10) LMSD-6230, "Subsystem E Specification for E-2 Equipment"

1-2-2

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

- (11) LMSD-424178, "Subsystem E Specification for E-5 Equipment"
- (12) LMSD-445000, "Subsystem F Specification for F-1 Equipment"
- (13) LMSD-6231, "Subsystem F Specification for F-2A Equipment"
- (14) LMSD-6232, "Subsystem F Specification for F-2B Equipment"
- (15) LMSD-445867, "Subsystem F Specification for F-3A Equipment"
- (16) LMSD-445869, "Subsystem F Specification for F-3B Equipment"
- (17) LMSD-6234, "Ground-Space Communications Subsystem Specification for Samos R1 Program"
- (18) LMSD-445044, "Ground-Space Communications Subsystem Specification for Samos R2 Program"
- (19) LMSD-424175, "Re-Entry Capsule Specification"
- (20) LMSD-6117, "General Environment Specification for Discoverer, MIDAS, and Sentry Programs"

III. SATELLITE VEHICLE CONFIGURATION

A. READOUT

1. FLIGHT CONFIGURATION I. Flight Configuration I shall be as follows:

a. AGENA

(1) AIRFRAME. The satellite vehicle airframe shall consist of the following: The nose-cone assembly, a part of which shall be jettisonable; the forward midbody assembly, including the forward equipment rack and payload supports; the aft midbody assembly; the aft equipment rack; the propellant tanks; the pressure spheres; fairings; antenna and instrumentation booms; and the adapter assembly, including the provisions for retro-rockets. The airframe shall be the carrier for the equipment it houses and supports and shall provide the necessary environmental protection, structural integrity, and alignment. During

1-2-3

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

the coast phase the vehicle airframe shall separate from its adapter, which shall have been attached to the Atlas booster during ground preparation for launch.

(2) PROPULSION. The satellite vehicle propulsion subsystem shall consist of the rocket engine and associated equipment. The rocket engine, USAF Model No. XLR-81-BA-5, shall incorporate a single thrust chamber assembly; oxidizer and fuel valves; a turbine pump assembly, including a gas generator, turbine and gear box, oxidizer and fuel pumps, and turbine exhaust duct; an engine mount, including a gimbal ring; and associated switches, valves, plumbing, and wiring. The associated equipment shall include the ullage control rockets; the propellant pressurization equipment, including necessary regulators, valves, and plumbing; and the necessary auxiliary equipment. The liquid propellants shall consist of inhibited red fuming nitric acid (IRFNA) as the oxidizer, and unsymmetrical dimethylhydrazine (UDMH) as the fuel. The propulsion subsystem shall be capable of providing the second stage thrust to enable the satellite vehicle to achieve the velocity necessary to accomplish its mission after separation from the Atlas booster.

(3) AUXILIARY POWER. The auxiliary power subsystem shall consist of silver peroxide-zinc primary batteries, inverters, a voltage regulator, wiring harness, the flight termination equipment, a power switch, a limiter assembly, and associated connectors, plugs, terminal strips, attachments, and wiring. The subsystem shall be capable of supplying electrical power for all vehicle equipment requiring such power, except for the flight termination equipment which shall have its own power supply.

(4) GUIDANCE AND CONTROL. The guidance and control subsystem shall consist of guidance, including the computer, the timer, the inertial reference package, the horizon scanner, and the secondary junction box; flight control, including electronics, pneumatic, and hydraulic controls; orbital stabilization equipment, including the attitude damping system; and equipment for measuring and recording attitude to satisfy reconnaissance equipment performance requirements. The guidance and control subsystem shall be capable of establishing attitude references and aligning the vehicle with them during the coast, orbital boost, reorientation, and orbital phases. It shall also be capable of establishing attitude references for readout purposes. Further, it shall be capable of determining vehicle velocity and of terminating engine thrust when the correct velocity has been reached. In addition, the guidance and control subsystem shall initiate programmed signals for starting, stopping, and maintaining various system equipment operations during the coast, orbital boost, reorientation and orbital phases.

1-2-4

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

(5) VEHICLE-BORNE COMMUNICATIONS. The vehicle-borne communications shall consist of:

(a) RADAR TRANSPONDER. An S-band radar transponder shall transmit a signal triggered by the signal received from the VERLORT radar to provide the capability for accurate long range tracking of the vehicle at tracking and acquisition sites not equipped with the UHF system. The transponder shall be equipped with a decoder so that real-time commands may be transmitted over the radar beam to initiate equipment functions within the vehicle.

(b) VHF ACQUISITION TRANSMITTER. A miniaturized, transistorized, low-power VHF transmitter shall be used to emit the signal which will assist the initial acquisition and angle tracking of the vehicle.

(c) UHF COMMAND RECEIVER. A UHF command receiver shall be used to receive program commands and ranging signals. The command signals provide real-time activation of equipment functions or are stored in the vehicle for later use. Accurate transmission and reception of command signals is noted by verification over the return telemetry link. The ranging signals are returned to the ground over the narrow-band data transmitter for comparison with the transmitted tones for the determination of range data.

(d) SEQUENCE PROGRAMMER. A sequence programmer shall be used to provide an accurate clock, a program storage, and a sequenced control for reading out and executing stored or real-time commands. The programmer shall be capable of furnishing timing signals for vehicle functions or for vehicle position indexing. It shall be subject to overriding by ground command.

(e) INTERMEDIATE STORAGE UNIT. An intermediate storage unit shall be used to provide additional stored program command and real-time command capacity to supplement the command capability of the sequence programmer in support of the visual and ferret reconnaissance payloads.

(f) PAM MULTIPLEXER. A PAM multiplexer shall be used to sample and encode the outputs from a number of information sources for transmission to the ground over the UHF narrow-band data transmitter.

(g) UHF WIDE-BAND DATA TRANSMITTER. A UHF wide-band data transmitter shall be used to transmit wide-band reconnaissance data to the ground based data link receivers in accordance with either programmed or real-time commands received from the

1-2-5

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

ground. This equipment shall deny useful information to unfriendly receivers and shall prevent exploitation of transmission for unfriendly purposes.

(h) UHF NARROW-BAND DATA TRANSMITTER.

A UHF narrow-band data transmitter shall be used to transmit narrow-band reconnaissance, ranging tones, environment, equipment status, scientific, or other useful data to the ground receiver.

(i) VHF NARROW-BAND DATA TRANSMITTER.

A VHF narrow-band transmitter shall be used to transmit the stored F-1 reconnaissance data to the ground receiver.

(j) MIXER-FILTER UNIT.

A mixer-filter unit shall be used to provide separation of ranging tones and command information from command receiver output for return to ground stations via the narrow-band data transmitter; to provide sub-carrier signals used for transmission of visual and ferret reconnaissance telemetry data; and to combine such data with returning ranging and command information, for transmission via the narrow-band data transmitter.

(k) VEHICLE ANTENNAS.

Because of the interaction between antennas in the vehicle, antennas shall be provided as integrated systems for all vehicle requirements.

(l) FM/FM TELEMETER.

Unitized FM/FM telemeters shall be installed. Tape recorders shall be installed with a high ratio of read-in to readout time. The tape recorder shall be of a continuous loop design, and two recording tracks shall be provided for recording the outputs of two commutators. The recorder-reproducers shall be programmed for read-in and for off periods by the recorder programmer. Attitude information shall be transmitted by this system.

b. PAYLOAD

(1) VISUAL RECONNAISSANCE.

The visual reconnaissance subsystem shall consist of film supply and take-up, test cameras, a film processor, web supply and take-up, storage loopers, an electronic readout system, thermal and humidity control, equipment mounting structure, pressure housing, and circuitry for executing real-time and programmed commands. The E-1 equipment shall have the capability to process pre-exposed film, electronically sense, and read out the information via the vehicle-ground communications link. E-1 equipment also will be capable of exposing raw film within the limitations imposed by the dual payload configuration.

1-2-6

~~SECRET~~

~~SECRET~~

LMSD-445160-B

(2) FERRET RECONNAISSANCE. The ferret reconnaissance subsystem for F-1 shall consist of antennas, receivers, data handling equipment, a recorder, and control equipment. ~~Example~~

~~_____~~
are scanning superheterodynes which shall provide a high probability of intercept. The data handling system converts the output of the receivers to coded digital signals which are stored by the magnetic tape recorder. The control system turns the equipment on and off for read-in of intercept data over the area of interest and readout of coded data over a tracking station. Each intercept consists of a digital word containing measurements of pulse repetition frequency, pulse width, vehicle time, and frequency.

2. FLIGHT CONFIGURATION II

a. AGENA

Configuration I. (1) AIRFRAME. Shall be the same as for Flight

Configuration I. (2) PROPULSION. Shall be the same as for Flight

Flight Configuration I. (3) AUXILIARY POWER. Shall be the same as for

as for Flight Configuration I. (4) GUIDANCE AND CONTROL. Shall be the same

(5) VEHICLE-BORNE COMMUNICATIONS. Shall be the same as for Flight Configuration I, except that the VHF narrow-band data transmitter shall be deleted and the ferret reconnaissance data shall be transmitted by the UHF narrow-band data transmitter to the ground receiver.

b. PAYLOAD

(1) VISUAL RECONNAISSANCE. Shall be the same as for Flight Configuration I.

(2) FERRET RECONNAISSANCE. The ferret reconnaissance subsystem shall consist of F-2A type equipment which has additional design capabilities to intercept, measure, store, and read out

1-2-7

~~SECRET~~

~~SECRET~~

LMSD-445160-B



coded digital signals which are stored by a fast start-stop magnetic tape recorder. The control equipment shall operate from stored commands or real-time commands from the ground which control read-in and read-out times, adjust equipment, or switch various redundant components in or out of the system to achieve higher reliability. The in-flight calibration equipment transmits a signal of accurately known characteristics to the F-2A equipment. When this signal is read out in digital form, it is compared by the ground data handling equipment with the transmitted signal to obtain F-2A calibration information. As a result of ground evaluation of F-2A operation, various commands may be transmitted to the vehicle to adjust components of the receiving equipment.

3. FLIGHT CONFIGURATION III

a. AGENA

(1) AIRFRAME. Shall be the same as for Flight Configuration II except for the provisions for the solar voltaic collector array and provisions for installing on all vehicles of this configuration after the first, the auxiliary propulsive devices.

(2) PROPULSION. Shall be the same as for Flight Configuration II, except that for all vehicles of this configuration after the first, auxiliary propulsive devices shall be included to provide incremental velocity components for the purpose of adjusting the orbit period and providing ullage control.

(3) AUXILIARY POWER. Shall be the same as for Flight Configuration II except that solar power photovoltaic equipment, combined with secondary batteries, shall power the E-2 equipment, the data link, command equipment, and the guidance equipment.

(4) GUIDANCE AND CONTROL. Shall be the same as for Flight Configuration II, except for capabilities required for orbit period adjustment and that the attitude damping system shall be replaced by an active attitude control system.

(5) VEHICLE-BORNE COMMUNICATIONS. Shall be the same as for Flight Configuration II except that the S-band radar transponder, the VHF acquisition transmitter, and the intermediate

1-2-8

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

storage unit shall be deleted, and the sequence programmer shall be replaced by a command programmer and decoder. In addition, the PAM multiplexer will be replaced by a more advanced unit.

b. PAYLOAD

(1) VISUAL RECONNAISSANCE. The visual reconnaissance subsystem for E-2 shall consist of a 36-inch focal length lens, associated 70mm camera and controls, film supply and take-up, two speed film processor, web supply and take-up, storage loopers, electronic readout system, thermal and humidity control, equipment mounting structure, pressure housing, and circuitry for executing real-time and programmed commands. The payload will be trainable to provide for oblique and/or stereo aerial photography. The E-2 equipment shall have the capability to aim the camera and photograph specific areas of interest, process the exposed film, and electronically sense and read out the information via the vehicle-ground communications link. The resultant photography shall have a design goal for a ground resolution of less than 20 feet.

4. FLIGHT CONFIGURATION IV

a. AGENA

(1) AIRFRAME. Shall be the same as for Flight Configuration III.

(2) PROPULSION. Shall be the same as for Flight Configuration II, except that auxiliary propulsive devices shall be included to provide incremental velocity components for the purpose of adjusting the orbit period and providing ullage control.

(3) AUXILIARY POWER. Shall be the same as for Flight Configuration III.

(4) GUIDANCE AND CONTROL. Shall be the same as for Flight Configuration III.

(5) VEHICLE-BORNE COMMUNICATIONS. Shall be the same as for Flight Configuration III except that the wide-band transmitter shall be omitted on the first three flight vehicles of this configuration and an additional UHF narrow-band data transmitter substituted.

1-2-9

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

b. PAYLOAD

(1) FERRET RECONNAISSANCE. The ferret reconnaissance subsystem shall consist of F-2B, F-3A, and F-3B equipment installed in flight vehicles of this configuration. The first flight vehicle will contain F-2B equipment which has the capability of the F-2A equipment and in addition will scan band 3a. The second and third flight vehicles will contain F-3A equipment which shall provide, in addition to F-2 capabilities, added capabilities to obtain Technical Intelligence information using the following techniques in an integrated system:

(a) 100 KC/S bandwidth analog recording

[REDACTED]

(a) 6 MC/S bandwidth analog recording

[REDACTED]

1-2-10

~~SECRET~~

LMSD-445160-B

B. RECOVERY

1. FLIGHT CONFIGURATION I

a. AGENA

(1) AIRFRAME. The satellite vehicle airframe subsystem shall consist of the following: the nose section, including the housing for the recovery capsule; the forward equipment structure, including the forward equipment rack; the center midbody; the aft midbody and engine support cone assembly; the aft equipment rack; the booster adapter including provisions for retro-rockets; the propellant tanks; the pressure spheres; and the fairings. The airframe shall be the carrier for the equipment it houses and supports, including the recovery capsule, and shall provide the necessary environmental protection, structural integrity, and alignment. During the coast phase, the vehicle airframe shall separate from its adapter, which shall have been attached to the Atlas booster during preparation for launch.

(2) PROPULSION. The satellite vehicle propulsion subsystem shall consist of the rocket engine and associated equipment. The rocket engine, USAF Model No. XLR-81-BA-5, shall incorporate a single thrust chamber assembly; oxidizer and fuel valves; a turbine pump assembly, including a gas generator, turbine and gear box, oxidizer and fuel pumps, and turbine exhaust duct; an engine mount, including a gimbal ring; and associated switches, valves, plumbing, and wiring. The associated equipment shall include the ullage control regulators, valves, and plumbing; and the necessary auxiliary equipment. The liquid propellants shall consist of inhibited red fuming nitric acid (IRFNA) as the oxidizer and unsymmetrical dimethylhydrazine (UDMH) as the fuel. The propulsion subsystem shall be capable of providing the second-stage thrust necessary to enable the satellite vehicle to achieve the velocity necessary to accomplish its orbit mission, after separation from the Atlas booster. Additionally, auxiliary propulsive devices shall be included to provide incremental velocity components for the purpose of adjusting the orbital period.

(3) AUXILIARY POWER. The auxiliary power subsystem shall consist of primary and secondary batteries, a solar-voltaic collector array, inverters, voltage regulators, wiring harness, the flight termination equipment, a power switch, load limit assemblies, and associated connectors, plugs, terminal strips, attachments, and wiring. The subsystem shall supply required electrical power to the vehicle and payload during ascent and orbit. An independent battery and associated circuitry shall be provided for the flight termination equipment. A separate auxiliary power supply will be integrated into the recovery capsule

1-2-11

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD 445160-B

and shall consist of silver-peroxide-zinc batteries, power converters and inverters, voltage regulator, and control components. The power supply shall provide required electrical power to the recovery capsule during re-entry and recovery.

(4) GUIDANCE AND CONTROL. The guidance and control subsystem shall consist of guidance, including the computer, the timer, the inertial reference package, the secondary junction box, and the horizon scanner; flight control, including electronics, pneumatic and hydraulic controls; equipment for measuring and recording attitude to satisfy payload requirements; and orbital stabilization equipment, including an active attitude control system. The guidance and control subsystem shall be capable of establishing attitude references and aligning the vehicle with them during the coast, orbital boost, and orbit phases and shall initiate programmed signals for starting, stopping, and maintaining various equipment operations during these phases. In addition, the guidance and control subsystem shall position the satellite to the proper retroangles for separation and reentry.

(5) VEHICLE-BORNE COMMUNICATIONS. The vehicle-borne communications shall consist of:

(a) UHF COMMAND RECEIVER. A UHF command receiver, consisting of a receiver, input devices to command decoding equipment, and other necessary equipment, shall be used to receive operational program commands, time signals, antenna orientation signals, and other ground-to-space control signals. The command signals provide real-time activation of equipment functions or are stored in the vehicle for subsequent use. Accurate transmission and reception of command signals is noted by verification over the return telemetry link.

(b) COMMAND PROGRAMMER. A command programmer and decoder shall be used to provide an accurate clock, a program storage, and a sequenced control for reading out and executing stored or real-time commands. The programmer shall be capable of furnishing timing signals for vehicle functions or for vehicle position indexing; it shall be subject to modification or overriding by ground command.

(c) PAM MULTIPLEXER. A PAM multiplexer shall be used to sample and encode the output from a number of information sources for transmission to the ground.

(d) UHF NARROW-BAND DATA TRANSMITTER. A UHF narrow-band data transmitter shall be used to transmit range, environment, equipment status, scientific, and other useful data to the ground receivers.

1-2-12

~~SECRET~~

~~SECRET~~

LMSD-445160-B

(e) VEHICLE ANTENNAS. Because of the interaction between antennas in the vehicle, antennas shall be provided as integrated systems for all vehicle requirements.

(f) FM/FM TELEMETER. A unitized FM/FM telemeter shall be installed. A tape recorder shall be installed with a high ratio of read-in to readout time. The tape recorder shall be of a continuous loop design and two recording tracks shall be provided for recording the outputs of two commutators. The recorder-reproducers shall be programmed for read-in and for off periods.

b. PAYLOAD

(1) VISUAL RECONNAISSANCE. The visual reconnaissance subsystem shall consist of a long focal length camera with time and attitude recording devices, film control, transport, ejection doors for camera aperture, control circuits capable of executing command signals from the vehicle programmer, and a suitable mounting structure. Provision shall be made for interchangeable mechanical and electrical connections with the vehicle and recovery capsule. The subsystem shall include environmental control equipment. The long-focal-length camera system shall be designed for an ultimate capability of achieving a five foot resolution. The locational accuracy of the photographic data shall be one mile.

(2) RECOVERY CAPSULE. The recovery capsule subsystem shall consist of the equipment to be recovered plus all associated equipment to house, operate, and detach the recovery payload. Recoverable equipment shall include film cassettes and associated motor drive, mounting structure, stowing device, films and photographic equipment, accelerometer, acquisition and homing beacon, retro-propulsion assembly including retro and spin rockets, retro rocket separation system, light beacons, stabilization equipment, and velocity integrator and thrust termination equipment. During early development flights, a telemeter and tape recorder shall be included in the capsule to measure performance during reentry. Recovery aids shall include the capsule heat shield, radio beacon, and light beacon.

IV. TESTING REQUIREMENTS

A. GROUND TESTS. In addition to satellite vehicle tests described in Tab 1, components, subassemblies, assemblies, and subsystems shall be subjected to development tests, qualification tests, and inspection tests as applicable. These tests are defined as follows:

1-2-13

~~SECRET~~

~~SECRET~~

LMSD-445160-B

1. DEVELOPMENT TESTS. Development tests shall be defined as those tests conducted on equipment or material for the purpose of evaluation of performance, operation, and limits.
2. QUALIFICATION TESTS. Qualification tests shall be defined as those tests conducted on equipment or material for the purpose of evaluation of the operation under environmental conditions specified in the environmental specifications listed in Paragraph II of this tab.
3. INSPECTION TESTS. Inspection tests shall be defined as those tests conducted on articles of a given design for the purpose of maintaining surveillance of quality in accordance with specified requirements.

1-2-14

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

Table I
NOMINAL PERFORMANCE

Flight Configuration	Readout				Recovery
	I	II	III	IV	I
Orbit Empty Weight (lb)	4280	4280	4280	4110	4630
Injection Altitude (s mi)	300	300	300	335F-2B 365F-3	150 200
Mean Altitude (s mi)	300	300	300	335- 365	150 200
Orbital Period (min)	94	94	94	95.5	90.6
Active Life (days)	12-15	12-15	120	365+	15- 30

1-2-15

~~SECRET~~

~~SECRET~~

LMSD-445160-B

Table II
FLIGHT MISSIONS AND CONFIGURATIONS

Flight Vehicle	Readout			
			Flight Mission	
	I	II	III	IV
1	FC-1 FC-1	FC-II		
2				
3				
4			FC-III	
5				FC-IV
6			FC-III	
7				FC-IV
8			FC-III	
9				FC-IV
10			FC-III	
11				FC-IV
12			FC-III	
13				FC-IV
14			FC-III	
			FC-IV	
Recovery				
Flight Vehicle	Flight Mission			
	I			
1	FC-1			
2	FC-1			
3	FC-1			
4	FC-1			

1-2-16

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

GROUND EQUIPMENT

I. SCOPE

A. GENERAL. The requirements for ground equipment are established for the Samos Program in this tab. The ground equipment shall consist of the following major categories: ground support equipment and satellite ground control equipment.

B. OBJECTIVES. The basic objective of ground equipment is to meet the satellite vehicle ground based equipment requirements necessary to achieve program objectives and flight missions as outlined in Tab 1 of this Section. Special emphasis shall be given to consideration of human factors, ruggedness of construction, simplicity and compactness of design, reliability, convenience of handling, maintainability, supportability and producibility. Weight and size shall be kept to a minimum consistent with strength and functional requirements. Provisions for the safety of personnel shall be incorporated to the maximum extent practical with regard to anticipated operating conditions and the capability of operating personnel. Insofar as practical, test ground support equipment shall be designed to prototype operational configurations.

II. DESIGN CRITERIA

A. PUBLICATIONS. The following publications shall be used in the design of ground equipment for the Samos Program:

1. MILITARY

a. The following military specifications shall be used as guides:

(1) MIL-M-008090B (USAF), "Mobility Requirements, Ground Support Equipment, General Specifications for," dated 14 March 1958.

(2) MIL-E-4970 (USAF), "Environmental Testing, Ground Support Equipment, General Specification for," dated 1 June 1955.

1-3-1

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

(3) MIL-A-8421A, "Air Transportability Requirements, Ground Support Equipment, General Specification for," dated 6 November 1956.

(4) MIL-F-25604A (ASG), "Fuel, Rocket, Unsymmetrical Dimethylhydrazine," dated 21 November 1957.

(5) MIL-E-4158B, "Electronic Equipment, Ground, General Requirements for," dated 3 January 1958, as amended by Amendment No. 1 dated 7 November 1958.

(6) MIL-N-007254D, "Oxidiser, Rocket Engine, Inhibited Red Fuming Nitric Acid," dated 13 October 1959.

b. Compliance with the following specifications shall be required:

(1) MIL-D9412C, "Data for Ground Support of Weapon Systems, Support Systems, Subsystems, and Equipment," dated 10 June 1958.

2. LOCKHEED MISSILES AND SPACE DIVISION

a. Compliance with the following Contractor specifications shall be required:

b. These specifications will become compliance requirements upon completion or revision by LMSD and subsequent approval by the Air Force:

(1) LMSD 6229, "Subsystem E Specification for E-1 (Component Test) Payload"

Equipment" (2) LMSD 6230, "Subsystem E Specification for E-2

E-5 Equipment" (3) LMSD 424178, "Subsystem E Specification for

F-1 Equipment" (4) LMSD 445000, "Subsystem F Specification for

F-2A Equipment" (5) LMSD 6231, "Subsystem F Specification for

~~SECRET~~

LMSD-445160-B

- (6) LMSD 6232, "Subsystem F Specification for F-2B Equipment"
- (7) LMSD 445867, "Subsystem F Specification for F-3A Equipment"
- (8) LMSD 445869, "Subsystem F Specification for F-3B Equipment"
- (9) LMSD 6234, "Ground-Space Communications Subsystem Specification for Samos R1 Program"
- (10) LMSD 445044, "Ground-Space Communications Subsystem Specification for Samos R2 Program"
- (11) LMSD 445046, "Ground Station Complex Specification for Samos R1 Program"
- (12) LMSD 445047, "Ground Station Complex Specification for Samos R2 Program"
- (13) LMSD 445048, "Launch Complex Specification, Samos Program"
- (14) LMSD 445461, "Service and Handling Equipment, Samos Program"
- (15) LMSD 445462, "Launch Monitoring Equipment Specification, Samos Program"
- (16) LMSD 445463, "Checkout Equipment Specification, Samos Program"
- (17) LMSD 6117, "General Environment Specification for Discoverer, MIDAS, and Sentry Programs"

B. VEHICLE CODES. Ground equipment shall be designed to conform to the latest issue of the following documents, which shall be used as reference and adhered to where applicable.

1. Interstate Commerce Commission, "Motor Carrier Safety Regulations Revision of 1952."
2. State of California, "California State Vehicle Code - September 1957."

1-3-3

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

III. EQUIPMENT REQUIREMENTS

A. GENERAL. Ground equipment for the Samos Program shall include the equipment necessary to perform the following functions:

1. Ground handling
2. Ground servicing and maintenance
3. Launch monitoring and control
4. Vehicle subsystem checkout
5. Vehicle system checkout
6. Receipt of reconnaissance and telemetry data
7. Vehicle acquisition and tracking
8. Ground command
9. Ground timing
10. Computation
11. Interstation communications
12. Intrastation communications
13. Vehicle control and display
14. Data processing and analysis
15. Ferret inflight calibration
16. Ferret evaluation and command
17. Ferret data calibration
18. Atlas booster real-time telemetry data display and recording.

B. GROUND SUPPORT EQUIPMENT

1. GROUND HANDLING EQUIPMENT. Ground handling equipment shall be capable of supporting the satellite vehicle and its components, including the visual, ferret, and recovery capsule subsystem

1-3-4

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-4451c0-B

equipment, and shall consist of transport trailers, maintenance and check-out stands, handling dollies, yokes, and slings, and other handling equipment as listed in Tab 5 of Section 2.

2. GROUND SERVICING EQUIPMENT. Ground servicing equipment shall be capable of servicing the vehicle, and shall consist of fuel and acid handling equipment, umbilical mast plumbing and wiring, personnel hoist, and other required servicing equipment as listed in Tab 5 of Section 2.

3. LAUNCH MONITOR AND CONTROL EQUIPMENT. Launch monitor and control equipment shall be capable of power conversion and distribution within the launch complex, of monitoring and controlling launch pad servicing functions and countdown operations, and shall consist of electrical conversion and distribution equipment, including launch complex cabling, blockhouse consoles, recorder and countdown equipment, closed-circuit television, and other required launch monitor and control equipment, as listed in Tab 5 of Section 2.

4. VEHICLE SUBSYSTEM CHECKOUT EQUIPMENT. Subsystem checkout equipment shall be capable of evaluating and recording the performance of each subsystem or unit within pre-selected limits and isolating component malfunctions. Vehicle subsystem checkout equipment shall consist of checkout consoles for the propulsion; auxiliary power, guidance and control, vehicle-borne communications, visual, ferret, and recovery capsule subsystems, checkout consoles for pressurization and tankage; checkout equipment for the telemeter units and beacons, and other vehicle subsystem checkout equipment as listed in Tab 5 of Section 2.

5. VEHICLE SYSTEM CHECKOUT EQUIPMENT. The vehicle system checkout equipment shall be capable of evaluating and recording the performance of each subsystem or unit operating as an integrated system. The vehicle system checkout equipment shall consist of an automatic control section composed of a test programmer, automatic evaluation equipment providing readout by printed document and lights; vehicle propulsion and guidance sections; vehicle communication section, power supply and distribution section, visual, ferret, and recovery capsule sections as listed in Tab 5 of Section 2.

C. SATELLITE GROUND CONTROL EQUIPMENT

1. VERLORT RADAR EQUIPMENT. The VERLORT radar equipment shall be capable of obtaining tracking information in the form of azimuth, elevation, and slant range through the use of S-band radar equipment which interrogates a vehicle-borne S-band transponder by means of coded pulses. The VERLORT equipment shall also provide a command capability other than guidance through the use of an additional command pulse. The VERLORT radar equipment shall include command

1-3-5

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

encoding equipment, analog computers (for acquisition and rough orbit computations), digital data output equipment, standby power units, and antennas. The equipment is listed in Tab 5 of Section 2.

2. VHF ACQUISITION AND TRACKING EQUIPMENT. The VHF acquisition and tracking equipment shall provide the means for accomplishing initial acquisition and rough tracking of the vehicle. The equipment shall consist, in part, of tri-helix antennas with associated control equipment, preamplifiers, multicouplers, and phase-coherent Doppler receivers. The tri-helix antenna output shall perform three functions by providing an RF signal which is used for acquisition and tracking; telemetry information which is fed to a telemetry receiver for data reduction; and Doppler information which is fed to a phase-coherent receiver for vehicle velocity determination. The remaining integral part of the VHF acquisition and tracking equipment shall consist of TLM-18 (60-foot parabolic dish) antennas with associated control and drive equipment, preamplifiers, multicouplers for telemeter and reconnaissance data receiving equipment, and null seeking error signal units which shall provide control information for directing the 60-foot dish antenna. The TLM-18 antenna output shall consist of a reconnaissance data channel, telemetry channels, and synchro data. The VHF acquisition and tracking equipment described is that normally found at a tracking and acquisition station; however, depending upon the locality and requirements of the individual station, instrumentation may vary. The equipment is listed in Tab 5 of Section 2.

3. GROUND CONTROL AND DISPLAY EQUIPMENT. The ground control and display equipment shall be capable of displaying vehicle space position parameters and vehicle equipment status, such as vehicle temperatures, vehicle equipment power levels, vehicle orientation rates (yaw, pitch, roll), etc. It shall provide controls for acquisition and tracking equipment, and shall include a capability for issuing real-time commands to the vehicle. The ground control and display equipment shall consist of supervisor's consoles, master control consoles, acquisition programmers, and plotting boards. The equipment is listed in Tab 5 of Section 2.

4. DATA HANDLING AND COMPUTATION EQUIPMENT. The data handling and computation equipment shall handle, process, and convert vehicle functional and tracking data, accomplish mission scheduling, and support operations control. The equipment shall consist of computers; data processing equipment; data analysis equipment; and data conversion and buffering units necessary to operate slaving, recording, real-time data displays, and tracking equipment. The equipment is listed in Tab 5 of Section 2.

5. VHF DATA RECEIVING EQUIPMENT. The VHF data receiving equipment shall provide the means to receive, demodulate, record, demultiplex, and furnish sensor data from F-1 payloads and boost-phase Atlas booster data to the display equipment. This equipment shall consist of TLM-18 automatic tracking antennas (see Paragraph 2 above), FM receivers, demultiplexing units, and recorders. The equipment is listed in Tab 5 of Section 2.
6. UHF ACQUISITION AND TRACKING EQUIPMENT. The UHF tracking and acquisition equipment shall provide the capability for searching for and acquiring the vehicle prior to the determination of precise vehicle coordinates, as well as tracking the vehicle to ascertain precise vehicle azimuth, elevation, and range. The UHF tracking and acquisition equipment shall consist of a precision UHF direction finder for acquisition and tracking and CW distance measuring equipment for range tracking; associated with these major elements are command transmitters, transmitting antennas, telemetry receivers and associated antennas, computers for acquisition and orbit computations, digital data output equipment, and standby power units. The equipment is listed in Tab 5 of Section 2.
7. UHF DATA RECEIVING EQUIPMENT. The UHF data receiving equipment provides the means of receiving and recording payload sensor data and furnishing it to readout devices and to the sensor display consoles. The UHF data receiving equipment shall consist of high-gain receiving antennas, demodulators, and recorders. The equipment is listed in Tab 5 of Section 2.
8. UHF COMMAND TRANSMITTING EQUIPMENT. The UHF command-transmitting equipment shall provide the means to transmit digital real-time commands from the ground which will activate equipment functions in the vehicle. The equipment shall consist of a high-power FM transmitter and a directional transmitting antenna. The equipment is listed in Tab 5 of Section 2.
9. PAYLOAD GROUND EQUIPMENT. The payload ground equipment shall be capable of accepting, reconstructing, and displaying visual and ferret reconnaissance data and auxiliary information. The payload ground equipment shall consist of sensor display consoles, command encoding equipment, and associated equipment. The equipment is listed in Tab 5 of Section 2.
10. GROUND TIMING AND DISPLAY EQUIPMENT. The ground timing and display equipment shall be capable of supplying master timing information for ground stations, synchronizing signals, and timing aids necessary both to establish vehicle position in orbit as a function of time

~~SECRET~~

and to synchronize ground station operations. The ground timing and display equipment shall consist of WWV time receivers, master time generators (synchronized with WWV), time display units, and timing terminal units for remote timing indications. The equipment required for this function of satellite ground control is listed under the headings of the equipment for which it supplies a support function. The equipment is listed in Tab 5 of Section 2.

11. INTRA/INTERSTATION COMMUNICATIONS AND DATA TRANSMISSION EQUIPMENT. The intrastation and interstation communications and data transmission equipment shall facilitate the flow of reconnaissance data, voice, teletype, launch control, and tracking information within portions of a single ground station and between ground stations. The equipment shall also provide the means for controlling and coordinating launch and postlaunch activities. The intrastation and interstation communications and data transmission equipment shall consist of the following types of network: high-speed data link, 100 wpm teletype, 60 wpm teletype, alternate voice/teletype, voice paging, hot-line direct communication, and normal voice communications. The equipment required for this function of satellite ground control is listed under the headings of the equipment for which it supplies a support function. The equipment is listed in Tab 5 of Section 2.

12. ALIGNMENT AND CALIBRATION EQUIPMENT. The alignment and calibration equipment shall provide the optical, photometric, and electronic means to align and calibrate angle tracking, acquisition, and range measuring equipment. Alignment is effected by use of boresight cameras, telescopes, target boards, and beacons after the optical and electrical axes of the antenna have been collimated. The equipment required for this function of satellite ground control is listed under the headings of the equipment for which it supplies a support function. The equipment is listed in Tab 5 of Section 2.

13. MISCELLANEOUS EQUIPMENT. The miscellaneous equipment shall include maintenance and storage equipment and standard test equipment at stations outside the zone of the interior. This equipment is listed in Tab 5 of Section 2.

IV. TESTING REQUIREMENTS

A. GROUND TESTS. Components, subassemblies, assemblies, and integrated systems shall be subjected to development, qualification, and inspection tests, as applicable. These tests, defined in Tab 2 of this Section, shall be scheduled to provide ground equipment capable of meeting functional requirements defined in Paragraph III above.

1-3-8

~~SECRET~~

~~SECRET~~

LMSD-445160-B

FACILITIES

I. SCOPE

A. GENERAL. The requirements for both Contractor-furnished and Government-furnished facilities and equipment for the Samos Program are established in this tab.

B. OBJECTIVE. Facilities shall be provided to support program administration and direction; research and development; system and flight testing tracking, control, and telemetry; reconnaissance data acquisition and processing; and intercept, control and recovery of re-entry vehicles.

II. DESIGN CRITERIA

A. PUBLICATIONS

1. The following publications shall be used as reference documents for the Samos Program facilities:

a. LMSD-59304 "Design Criteria and Outline Specification, Sentry Launch Complex, Point Arguello, California," dated 1 August 1958

b. LMSD-106722 "Design Criteria and Outline Specifications, Missile Assembly Building, Camp Cooks, California," dated 30 May 1958 and amended by LMSD-59316, dated 22 July 1958

c. LMSD-109014 "Basis for Design for Typical Development/Operational Tracking Station," dated 7 March 1958

d. LMSD-109005 "Design Criteria and Outline Specification, Development/Operational Tracking Station, New Boston, New Hampshire," dated 13 October 1958

e. LMSD-109004 "Design Criteria and Outline Specification; Development/Operational Tracking Station, Ottumwa, Iowa," dated 13 October 1958

1-4-1

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

B. DESIGN STANDARDS. Facilities shall be designed to conform to acceptable design standards identified by, but not limited to, the following documents:

1. OCE Engineering Manuals for Military Construction
2. USAF Installations Facility Requirements Manual
3. AFM 88-15, Standard Outline Specifications for Air Force Facilities
4. Uniform Building Code
5. National Building Code
6. National Plumbing Code
7. National Electrical Code
8. National Electrical Manufacturers Association Standards
9. American Concrete Institute Building Codes and Standards
10. American Water Works Association Standards
11. American Association of State Highway Official Standards
12. Heating, Ventilating, and Air-Conditioning Guide
13. National Bureau of Standards Report 3079, Requirements for Concrete Masonry Design
14. American Institute of Steel Construction Manual
15. Underwriters' Laboratories Incorporated, Standards
16. American Welding Society Code
17. Applicable Local Construction Codes.

III. FACILITIES REQUIREMENTS

A. LMSD INPLANT FACILITIES. Lockheed inplant facilities utilized in the Samos Program will be located in the Palo Alto-Sunnyvale-Santa Cruz area and in the Van Nuys area. These facilities shall support the design, fabrication, development, laboratory testing.

1-4-2

~~SECRET~~

~~SECRET~~

LMSD-445160-B

assembly, installation, production, and program management activities necessary to accomplish the objectives of the Samos Program.

B. SANTA CRUZ TEST BASE, CALIFORNIA. The Santa Cruz Test Base shall provide the facilities for test operations involving the capability to test components, subsystems, and satellite vehicles, including engine firing, as required for development and acceptance testing. The facilities and equipment provided for the Discoverer Program shall be used for the Samos Program. The additional test stands (2), programmed in the MIDAS Program, shall be utilized as required for the Samos Program.

C. SUBCONTRACTORS' PLANT FACILITIES. Subcontractors' plant facilities are required to support the design, development, fabrication, testing, and administrative activities necessary to accomplish the subcontract tasks involved in the Samos Program. Special test equipment, if required, shall be a matter for resolution in the final negotiation of each subcontract.

D. LAUNCH BASE, VANDENBERG AFB, CALIFORNIA. All flight test vehicles in the Samos Program shall be launched from Vandenberg AFB - Point Arguello. Facilities shall provide the capability for launching at a maximum rate of two Samos flights per month in addition to other launch requirements. The launch base will consist of missile assembly, shop, administration, and engineering facilities; a launch complex containing two launch pads at Point Arguello; and the necessary support facilities and utilities. The launch complex and the missile assembly, shop, administration, and engineering facilities shall be new; the balance of the launch base facilities shall be provided from the Discoverer Program.

E. TRACKING AND ACQUISITION STATION, VANDENBERG AFB, CALIFORNIA. The Vandenberg Tracking and Acquisition Station will obtain launch and ascent performance and trajectory data. It will also acquire and track the vehicle; receive telemetry data, visual readout data and ferret readout data; execute inflight calibration; and provide for commands to the orbiting vehicle. The existing facilities and the equipment provided at this station for the Discoverer Program will be used as required. Additional facilities shall be required to provide the visual readout capability and to convert the station to UHF. Modification or addition to the VHF telemetry receiver building will be required to accommodate booster real-time telemetry display and recording equipment.

1-4-3

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

F. TRACKING AND ACQUISITION STATION, POINT MUGU, CALIFORNIA. The Point Mugu Tracking and Acquisition Station will provide tracking for the launch ascent phase only. For this purpose, some of its tracking operations shall be slaved to the Vandenberg Tracking and Acquisition Station. During the orbital phase, Pt. Mugu may serve as a VHF backup station for tracking and telemetry data acquisition supporting the Vandenberg station, if required. The facilities and equipment shall consist of existing facilities provided for the Discoverer Program.

G. TELEMETRY SHIP. The telemetry ship will receive telemetry data from the satellite vehicle as required. The ship as equipped for service in the Discoverer Program, including telemetry data acquisition equipment and the ship-to-air data pickup equipment, shall be used, except that ferret inflight calibration equipment shall be added.

H. TRACKING AND ACQUISITION STATION, KAENA POINT, HAWAII. The Kaena Point Tracking and Acquisition Station will acquire and track the vehicle, receive telemetry data, execute inflight calibration, and command the orbiting vehicle. The existing facilities and equipment provided at this station for the Discoverer Program will be used as required. Additional facilities shall be required to convert the station to UHF.

I. TRACKING AND ACQUISITION STATION, KODIAK ISLAND, ALASKA. The Kodiak Tracking and Acquisition Station will acquire and track the vehicle, receive telemetry data, and command the orbiting vehicle. As long as this station is used, it shall be necessary for the satellite vehicle to carry a VHF transmitter in addition to the UHF transmitter. The facilities and equipment shall consist of existing facilities provided for the Discoverer Program.

J. TRACKING AND ACQUISITION STATION, NEW BOSTON, NEW HAMPSHIRE. The New Boston Tracking and Acquisition Station will acquire and track the vehicle; receive telemetry, visual readout and ferret readout data; execute inflight calibration and command the orbiting vehicle.

K. TRACKING AND ACQUISITION STATION, OTTUMWA, IOWA. The Ottumwa Tracking and Acquisition Station shall acquire and track the vehicle; receive telemetry, visual readout and ferret readout data; execute inflight calibration; and command the orbiting vehicle.

L. TRACKING AND ACQUISITION STATION, FORT STEVENS, OREGON. The Fort Stevens Tracking and Acquisition Station shall acquire and track the vehicle; receive telemetry, visual readout and ferret readout data; execute inflight calibration; and command the orbiting vehicle.

1-4-4

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

M. HAWAIIAN CONTROL CENTER, HICKAM AFB, HAWAII. The Hawaiian Control Center located at Hickam AFB, Hawaii, shall dispatch and control air and sea elements of the recovery force during recovery operations in the area of the Hawaiian Islands. This center shall be equipped with the necessary communications to permit real-time command and control of both the air-borne and sea-borne elements of the recovery force. The facilities and equipment shall consist of the facilities and equipment provided for the Discoverer Program.

N. RECOVERY EQUIPMENT TEST OFFICE, EDWARDS AFB, CALIFORNIA. A field office responsible for the control of the development flight tests for the evaluation of recovery equipment and techniques will be established at Edwards AFB. The brick and mortar facilities and equipment shall be Government-furnished from existing facilities at this base.

O. PACIFIC MISSILE RANGE, POINT MUGU, CALIFORNIA. The Pacific Missile Range will be used for the final tests of the direction-finding equipment and techniques and complete recovery procedures.

P. OPTICAL TRACKING STATIONS, SPACE TRACK. Space Track Stations will be used for high-accuracy determination of orbital position. These stations will be integrated into the communications network of the Samos Program.

Q. DEVELOPMENT CONTROL CENTER, SUNNYVALE, CALIFORNIA. The Development Control Center will be equipped and used to provide for centralized satellite system control and will:

1. Check out and integrate various equipment and stations into a system test complex
2. Direct countdown and flight operations
3. Direct transmission, processing and dissemination of tracking information
4. Generate and disseminate command and control information.
5. Provide for centralized system control including the scheduling of vehicles and equipment operation, acquisition prediction, transmission of collected reconnaissance data, reconnaissance data indexing, and quality control of data.
6. Provide centralized control of the Visual Recovery Reconnaissance tracking, acquisition, and command system.

1-4-5

~~SECRET~~

~~SECRET~~

LMSD-445160-B

The facility is intended to be constructed in two primary increments. The first increment will contain a limited automatic system controls capability; the second will contain large-scale general-purpose digital computers.

R. COMPUTER FACILITY, SUNNYVALE, CALIFORNIA. The LMSD Computer Facility at Sunnyvale will accomplish the computer functions in support of flight operations on an interim basis, and will perform data smoothing, orbit computations, impact predictions, acquisition predictions, and scheduling. In particular, the computer facility will:

1. Generate nominal ephemeris data and transmit tracking station acquisition and tracking programs
2. Using tracking data, make revised orbital trajectory calculations and transmit revised acquisition and tracking programs
3. Calculate and transmit data required for setting timers and initiating recovery operations
4. Calculate and transmit predicted recovery area data
5. Assist Development Control Center in checkout and integration of tracking stations
6. Process ferret intercept, calibration, and quality control data for system technical evaluation and long-term payload control
7. Process reconnaissance operational data, and evaluate system performance to enable the Test Director to judge if recovery can or must be initiated prior to achievement of the 30-day maximum Visual Recovery Program active orbital life capability.

The LMSD Computer Facility at Sunnyvale will replace the functions being accomplished by the LMSD Computer Facility at Palo Alto for the Discoverer Program. This transfer of functions will be accomplished prior to the beginning of Samos flight test operations. The LMSD facility at Sunnyvale will accommodate the requirements of the Samos Program until the time that computer capacity is provided physically within the Development Control Center.

1-4-6

~~SECRET~~

LOCKHEED AIRCRAFT CORPORATION

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

PERSONNEL

I. SCOPE

A. GENERAL. The requirement for the development of a Samos personnel subsystem is established in this tab.

B. OBJECTIVES. The objectives of the personnel subsystem development for the Samos System are:

1. Provide a personnel capability to control, operate, and maintain the system
2. Evaluate this personnel subsystem and its development as a model for the development of an AF personnel subsystem
3. Establish plans and methods to later develop and provide an operational capability.

II. PERSONNEL PROGRAM CRITERIA

A. PUBLICATIONS

1. Compliance with the following documents and their references shall be required, except as specifically exempted by AFBMD:

a. WDT Exhibit 56-5C, "Technical Manuals Program," dated August 1958 with the following deviation:

(1) MIL-M-9864, "Technical Manuals: Operation and Organizational Maintenance (Missile Weapon Systems)," dated 30 June 1959 shall be used in lieu of WDT 56-3 referenced in WDT-56-5C.

b. AFBM Exhibit 58-18, "Qualitative Personnel Requirements Information," dated 15 September 1958.

1-5-1

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

c. MIL-T-4857B(USAF), "Training Equipment, Weapon System, Specification and Specification Compliance Test Outlines, Instructions and Requirements for Inspection of," dated 18 December 1957.

d. WDT Exhibit 56-4, "Training Parts Provisioning Document for USAF R & D Service Test or Production Equipment Contracts (WS-107A/315A)."

e. WDD-59-TS-172, "Sentry Training Concept," dated 15 July 1959.

2. The following documents shall be used as guides:

a. WDT Exhibit 57-7, "Hardware Analysis Program for Ballistic Missile Weapons Systems and Advanced Space Systems," dated 17 October 1957 as amended 1 June 1959.

b. AFR 50-9, "Special Training," dated 23 January 1959

c. AFR 50-23, "Training to Support Missiles," dated 6 August 1957

3. The following specification will become a compliance requirement upon completion by LMSD and subsequent approval by the Air Force.

a. LMSD-440268, "Human Engineering Design Standards for Satellite Systems Equipment."

III. RESPONSIBLE ACTIVITIES

A. GENERAL. The tasks of human engineering, personnel requirements, development, training and manuals and other job aids development shall be to forecast and meet the requirements of the Samos personnel subsystem (to include both Contractor and AF cadre personnel and the planning, training, evaluation, and equipment required to develop and support these personnel) so that it will remain in step with hardware development.

B. HUMAN ENGINEERING. The human engineering activity shall participate in the design and development of the system hardware so as to establish and incorporate human factor objectives and criteria, ensure proper allocation of system functions to men and machines, describe the sequences of operator decisions and actions, incorporate maintainability into equipment design and arrangement, and provide for efficient equipment and work-space layout to include the man-man and man-machine communication links; participate in and

1-5-2

~~SECRET~~

~~SECRET~~

LMSD-445160-B

conduct reviews, analyses and studies to evaluate and verify from a human factor's standpoint the adequacy of initial modification design and to provide a basis for modification of equipment and/or procedure. This includes a human factor review of system operation for each test flight, and field analysis to detail the potential and actual failures of the personnel subsystem and to recommend remedial action.

C. PERSONNEL REQUIREMENTS. Personnel requirements information for the launch base, each tracking and acquisition station, and each control center shall be provided as appropriate. Personnel requirements information thus provided will reflect available information to be developed in consonance with the development of the Samos Program.

D. TRAINING. A training program consistent with the personnel need dates will be planned and conducted to fulfill the training requirements generated by the manning of the launch base, each tracking and acquisition station, and each control center. This program provides for both individual and unit training and will be conducted at the Contractor's plant, at associate or subcontractors' plants, or at the test sites as necessary. The training activity shall also determine which training equipment and aids are required. A developmental program will be instituted to provide training equipment planning information, performance and design specifications and to fabricate, install, and checkout the required equipment. The training activity shall participate in studies of the feasibility of using simulation techniques and equipment to provide means for developing, evaluating, and maintaining system proficiency; and study special training requirements of the Samos Program.

E. MANUALS AND JOB AIDS. The manuals development activity will plan for and provide for the development of Class III Utility Manuals and Class II Interim Manuals. The class of manuals to be provided will be determined by the extent of modification and/or replacement the equipment is to undergo prior to design freeze for the operational Samos Program. The program will provide centralized control as required to perform surveillance of manual use, procedures for revision and for the issuance of standardized procedures throughout the system.

1-5-3

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-44516C-B

LOGISTICS

I. SCOPE

A. GENERAL. The requirements for logistic support of the Samos Program are established in this tab.

B. OBJECTIVE. The objective of the logistic operation shall be to procure, store, transport, issue, maintain, modify, and repair the supplies and equipment necessary to maintain the launch schedule and to support the flight test objectives.

II. LOGISTIC CRITERIA

A. PUBLICATIONS

1. Compliance with the following documents shall be required in the development of the logistic plan for the Samos Program.

a. LMSD-427102B, "Reliability Requirements for the Samos Program," dated 1 November 1959.

b. WDT Exhibit 57-7, "Hardware Analysis Program for Ballistic Missile Weapon Systems and Advanced Space Systems," dated 17 October 1957 as amended 1 June 1959.

c. WDT Exhibit 57-29, "Test Ground Support Equipment, Spares Therefor, and Spare Parts for Missiles for the Test Program," dated 15 April 1957 as revised 15 October 1957.

2. The following specifications shall be used as a guide:

a. MIL-P-116C, "Preservation, Methods of," dated 27 February 1957

b. MIL-STD-129B, "Marking for Shipment and Storage," dated 10 April 1957.

1-6-1

~~SECRET~~

I.MSD-445160-B

III. LOGISTIC SUPPORT REQUIREMENTS

A. CONTROL FUNCTION. A logistics control organization shall be established at the Contractor's home plant site. This activity shall establish the levels of equipment, materials, and spares in the various bonded storage areas; maintain and coordinate the flow of new serviceable, and reparable Government-furnished/Contractor-furnished equipment items between stations; establish organization, field, and depot level maintenance capability requirements; coordinate use of Government-furnished transportation; continually evaluate and program changes to the logistic plan of operations; and prepare and submit reports as required. Responsibility for all subcontractor effort is to be included.

B. SUPPLY FUNCTION

1. HOME-PLANT SITES. A depot level supply center for all Samos supply functions shall be established at the Contractor's home plant site. This depot activity shall operate bonded storage areas; procure, issue, and ship new and serviceable Government-furnished/Contractor-furnished equipment items to test site bonded storage areas; issue to maintenance activities reparables received from test sites; and prepare data for reports required in Paragraph A above.

2. TEST SITES. Organizational level supply centers shall be established at the principal test sites. These activities shall operate the bonded storage areas; receive and issue new and serviceable Government-furnished/Contractor-furnished equipment items; issue reparable Government-furnished/Contractor-furnished equipment items to organizational maintenance activity; ship depot level reparables to depot maintenance activity; and prepare data for reports required in Paragraph A above.

C. MAINTENANCE FUNCTION

1. HOME-PLANT SITES. A depot maintenance activity shall be established at the Contractor's home plant site. This activity shall receive reparable items from the bonded storage areas; analyze the reparables for required materials and spare parts and effect the necessary repairs and/or modifications; return serviceable items to supply; and prepare data for reports required in Paragraph A above.

2. TEST SITES. An organizational level maintenance activity shall be established at each test site which has a bonded storage area. This activity shall receive reparable items from the bonded storage

1-6-2

~~SECRET~~

~~SECRET~~

LMSD-445160-B

areas; analyze the reparables for required materials and spare parts and effect the necessary repairs and/or modifications; return serviceable items to supply; and prepare data for reports required in Paragraph A above.

D. TRANSPORTATION

1. Transport of serviceable and reparable equipment between locations as required to support the Samos Program shall be furnished as indicated in Tab 4 of Section 2.

E. SPARES

1. For the purposes of this Program, the definition of spares shall be that of WDTG Exhibit 57-29 and as further clarified below:

a. Spares shall be defined as those portions of the Satellite Systems inventory which are required for maintenance, repair, overhaul or modification of ground support equipment, ground operating equipment, and flight vehicles called for by or in support of the contract, whether fabricated by the Contractor or purchased by the Contractor from others. Spares shall be further classified as follows:

(1) Spare equipments shall be defined as complete prime operating units or major chassis. Examples of spare equipments are VHF Acquisition Transmitter, S-Band Beacon Transponder, VERLORT Radar Modulator, etc.

(2) Spare parts shall be defined as components, assemblies, sub-assemblies, or parts of a prime operating unit or major chassis. Examples of spare parts are bolts, printed circuit cards, microswitches, etc. Spare parts shall be further broken down into common and peculiar spare parts.

(a) Common Spare Parts - Common spare parts shall be defined as hardware and electronic items readily available from more than one source of supply.

(b) Peculiar Spare Parts - Peculiar spare parts shall be defined as hardware and electronic items available from a sole source of supply to include standard items that have been modified, subjected to special test standards or parts that have been manufactured to meet a specific technical application.

1-6-3

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

LAUNCH PLAN

I. SCOPE

A. GENERAL. The launch plan, for planning purposes only, is established in this tab.

B. OBJECTIVE. The objective of the launch plan shall be to provide the planning instrument which together with Samos Program Objectives of Section 1 shall form the basis for the Work Statement of Section 2.

II. LAUNCH PLAN

A. The Atlas-boosted Samos flight vehicles shall be planned to be launched from Vandenberg AFB - Point Arguello as follows:

Readout	Recovery	Date
1		June 1960
1		August 1960
1		September 1960
1		November 1960
1		December 1960
1		January 1961
1		February 1961
1		May 1961
1	1	July 1961
1		August 1961
1	1	September 1961
1		October 1961
1	1	December 1961
1		January 1962
1	1	February 1962
		May 1962

~~SECRET~~

LMSD-445160-B

0.0 INTRODUCTION TO STATEMENT OF WORK

0.1 The Lockheed Aircraft Corporation Missiles and Space Division shall plan and conduct a program of research and development leading toward the attainment of the satellite vehicle system described in Section 1, except for those portions applicable to the Communications and Control System.

0.2 Subject to the overall management of the AFBMD/BMC team, the Lockheed Missiles and Space Division shall fulfill responsible technical direction of the Samos Program as Weapon System Contractor. Government approval of the technical decisions of the Contractor shall not be required prior to implementation, except as specifically set forth elsewhere in this contract. This provision should not, however, be construed as in any way limiting the right of the Government to direct or redirect the technical aspects of the Contractor's efforts at any time. Where such direction affects costs or schedules, or is contradictory to the provisions of this contract, normal contract change procedures shall apply.

0.3 The program of research and development is to be conducted as part of a continuing effort; this Work Statement covers the period from the completion of the Samos portion of Contract AF 04(647)-97 through 31 March 1961. To assure that a measure of progress will be available, the Contractor shall provide a detailed schedule of milestones extending through calendar year 1961. Progress toward, and the attainment of these milestones shall be reported monthly.

0.4 The Contractor's drawings shall be prepared in accordance with specification MIL-D-5028B for items of airborne and ground equipment to be used during the Samos Research and Development Program, with the following deviations referenced to paragraphs of specification MIL-D-5028B:

a. Drawing titles shall be in general accordance with MIL-D-5028B but need not comply with the precision required in the use of abbreviations, periods in abbreviations, and the H-6-1 catalog (Paragraph 3.3.1).

b. Weight of parts shall not be required on drawings (Paragraph 3.3.3).

c. Breakdown of drawings need not conform. Vehicle drawings may be broken down so that equipment installations and structural drawings are separate (Paragraph 3.4.1).

d. Electrical harness assembly drawings are not required; however, photographs of wiring boards shall be made available upon specific request (Paragraph 3.4.1.2).

2-1-1

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

- e. Tube bend data shall not be required (Paragraph 3. 4. 1. 4).
- f. Electrical harness installation drawings shall not be required (Paragraph 3. 4. 1. 5).
- g. Special notes identifying Specification Control Drawings shall not be required (Paragraph 3. 4. 4. 3).
- h. Alteration drawings shall be made for functional schematic changes to commercial items used in ground support and checkout equipment. Photographs will be available for mechanical structure changes to commercial items used in ground support and checkout equipment (Paragraph 3. 4. 4. 4).
- i. Legibility of drawings shall apply only to the extent that every line, letter, and character shall be readable on a shop print (blueprint, zinc, etc.) made as a one generation reproduction from the working tracing (Paragraph 3. 8).

Contractor and subcontractor drawings pertaining to items for use during the research and development program need not be delivered to the Air Force but shall be made available to the Air Force as specifically requested by drawing number. Commercial drawings will generally not be available during the research and development program; however, the Contractor will request a commercial vendor to submit drawings upon receipt of a specific request from the Air Force.

0. 5 Division of Responsibilities Between LMSD and Convair

0. 5. 1 Mating of the Samos (Atlas) booster to the Samos vehicle shall be a joint effort by LMSD and Convair, and shall be accomplished at Vandenberg AFB. The time and place for composite systems checkout and compatibility tests shall be determined by mutual agreement at Vandenberg AFB within current flight test working group procedures. This work shall be accomplished with Lockheed and Convair working on their respective equipment, or as mutually arranged.

0. 5. 2 Lockheed has overall systems responsibility as Weapon System Contractor. Convair shall have the status of Associate Contractor within the scope of the Samos Program.

0. 5. 3 Lockheed shall be responsible for the Samos satellite vehicle and supporting equipment, including the booster adapter.

0. 5. 4 Convair shall be responsible for the Atlas booster and that portion of the ground support equipment for which it is responsible in the WS-107A-1 Program.

2-1-2

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

0. 5. 5 Convair shall be responsible for all modification and design changes to the Atlas booster and ground support equipment referenced in Paragraph 0. 5. 4 above. Modifications and/or changes to subsystem equipment furnished to the WS-107A-1 Program by Associate Contractors shall be the responsibility of those Associate Contractors. However, it shall be Convair's responsibility to make timely integration of all changes and modifications.

0. 5. 6 It shall be Lockheed's responsibility to coordinate with Convair all design engineering and installation of equipment that could affect the operation of either the Atlas booster or basic test facility at Vandenberg AFB.

0. 5. 7 Lockheed, as Weapon System Contractor, shall be responsible for overall conduct of the Samos Program under the direction of the AFBMD.

0. 5. 8 Lockheed shall be responsible for providing to AFBMD, in suitable form for the generation of booster guidance equations, the overall closed-loop (guided) reference trajectories from launch of the Samos/Atlas vehicle to orbit injection.

0. 5. 9 Lockheed shall establish coordination with Convair to insure that the reference trajectories specified by Lockheed satisfy the necessary design constraints of the Atlas vehicle.

0. 5. 10 Convair shall be responsible for furnishing Lockheed with sufficient data as required for determination of the reference trajectories, such as weights, propulsion data, etc., including design tolerances and non-standard conditions.

0. 5. 11 Lockheed shall be responsible to the AFBMD test controller for the conduct of the Samos vehicle countdown in accordance with the countdown procedures developed jointly by LMSD and Convair and approved by the Vandenberg AFB flight test working group. If at any time during the countdown the LMSD test conductor detects a condition which would preclude achievement of test objectives, this condition shall be reported to the AFBMD test controller for resolution.

0. 5. 12 Convair shall be responsible to the AFBMD test controller for the conduct of the Atlas booster countdown in accordance with the countdown procedures developed jointly by LMSD and Convair and approved by the Vandenberg AFB flight test working group. If at any time during the countdown the Convair test conductor detects a condition which would preclude achievement of test objectives, this condition shall be reported to the AFBMD test controller for resolution.

2-1-3

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

0. 5. 13 LMSD shall be responsible for publishing the Samos Detailed Test Objectives after coordination with Convair on those items that concern the Atlas, its support, and its operation. Similar procedures shall be followed for other documents which require a coordinated effort.
0. 5. 14 Convair shall be responsible for data recording and data reduction of booster landline instrumentation utilized at Vandenberg AFB. Lockheed shall be responsible for data recording and data reduction of the Lockheed-furnished satellite vehicle and supporting equipment instrumentation.
0. 5. 15 Convair shall be responsible for the airborne telemetering requirements of the Atlas booster. Convair shall be responsible for the reduction of data obtained from the telemetering equipment carried within the Atlas booster.
0. 5. 16 Lockheed shall be responsible for furnishing design criteria for the launch complex at Vandenberg AFB. The criteria shall be coordinated with Convair by Lockheed.
0. 5. 17 Lockheed shall be responsible for the installation and checkout of all launch complex GSE unique to the Samos vehicle, except for blockhouse-to-pad cables which shall be furnished to Convair by Lockheed and installed by Convair.
0. 5. 18 Convair shall be responsible for the detail scheduling of WS-107A-1 complex activities including Samos Program activities that take place concurrently.
0. 5. 19 Lockheed shall be the launch complex manager.
0. 5. 20 Lockheed shall be responsible for the integrated Samos/Atlas booster countdown manuals. Upon completion of the integrated countdown manuals, they will be submitted to the AFBMD flight test working group for review and approval.

2-1-4

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

1.0 GENERAL

1.1 Management. Contractor management of the Samos Program shall be established to satisfy the requirements of Paragraph 0.0 (Introduction to Statement of Work) and the paragraphs which follow. The management activities shall be defined as the centralized direction of the program by the Weapon System Contractor, including management activities in the specific areas of space system management, planning, development, test and operations, program administration, and reliability. The Contractor shall be supported in this effort by associate contractors. It shall be the responsibility of the Contractor to maintain close coordination with associate contractors as well as Government agencies involved with the program.

1.2 Systems

1.2.1 Development and Integration

1.2.1.1 Analyses, Studies, Coordination. The Contractor shall perform engineering and operational analyses, system design studies, modification design and engineering liaison, production coordination and data release, technical support for the system integration of all subsystems being developed under this contract, production engineering, materials, processes, components, and standards service, and shall perform all other tasks required to insure efficient development of the Samos satellite system. The scope of such activity shall be sufficient to coordinate the work further described under each subsystem, to reach the program milestones, and to maintain a continuing review of the adequacy of both the detail requirements of this contract and performance against those requirements.

1.2.1.2 Advanced Planning. The Contractor shall be responsible for developing, establishing, and maintaining the Weapon System Development Plan in accordance with AFBMD management procedures for investigation of new systems and applications related to the Samos Program; for performing studies of weapon system concepts, for defining preliminary operational concepts and plans to form a logical datum for system design criteria, and for investigating alternate applications of the Samos system and its derivatives. The results and recommendations of these studies shall be reported to AFBMD.

1.2.1.3 Geophysical Environment (Subsystem J)

1.2.1.3.1 The Contractor shall determine, and provide the following information to the Geophysics Research Directorate, Air Force Cambridge Research Center, through the WS-117L Weapon System Project Office:

~~SECRET~~

LMSD-445160-B

- a. Requirements for geophysical data and design criteria, including justification for all such requirements
- b. The form or manner in which the Geophysics Research Directorate shall provide geophysical data and design criteria in those areas approved as valid requirements by the Weapon System Project Office
- c. The order of priority for geophysical data and design criteria which will most effectively meet the requirements for system design and development.

1. 2. 1. 3. 2 The Contractor shall, with the concurrence of the Weapon System Project Office, provide to the Geophysics Research Directorate the necessary facilities, telemetry channels, power source, vehicle design, technical information, and other items which will enable the Geophysics Research Directorate to utilize Samos test vehicles for collection of geophysical design data as defined and required above. The Contractor's activity with respect to Subsystem J also shall include liaison with the Geophysics Research Directorate to insure timely exchange of requirements and technical information.

1. 2. 1. 4 Subsystem I Interface. To insure optimum design and development of the Samos system and the proper meshing of applicable portions of the collection control system and of Subsystems E and F with Subsystem I (the Data Processing Subsystem), LMSD and the Prime Contractor for Subsystem I shall collaborate to make arrangements for a sufficiently full and timely flow of information from each project to the other and from each set of subcontractors to the other, as their work affects the interface areas. They shall jointly arrange orderly means to bring to light any divergencies between the two parts of the total program, to effect the best possible compromises as they are needed, and to refer to the Government Contracting Officers (LMSD to BMC and Prime Contractor Subsystem I to RADC) for decision on any questions which cannot be resolved by agreement. They each shall be responsible for maintaining constant vigilance of the interface areas and the timely notification and referral to AFBMD/Samos Project Office of any potential or actual problem areas, or areas of omission by either group which would affect the overall system capability. It shall be the intent of the procuring agencies (BMD/RADC) to assist in the solution of interface problems before the problems require arbitrary decision.

1. 2. 1. 4. 1 The Contractor shall develop a 35mm to 9-1/2 inch reassembly printer in accordance with LMSD-445883, "Specification for Reassembly Printer," dated 1 November 1959. Two printers will be provided, one for delivery to the Development Control Center and the other for delivery to Subsystem I.

2-1-6

~~SECRET~~

~~SECRET~~

LMSD-445160-B

1.2.1.5 Design Test Data Reduction. The Contractor shall perform the reduction of data derived from all inplant subsystem, development, qualification, and inspection test efforts associated with the Samos Program.

1.2.2 Reliability. The Contractor shall conduct a reliability program for the Samos Program which will satisfy the reliability objectives given in Paragraph V, Tab I of Section 1. In carrying out this program the Contractor shall follow the procedures of Appendix A to LMSD-445723, "Reliability Program for Satellite Systems," dated 15 September 1959. To insure that the reliability of contractually deliverable items conforms to the reliability requirements, the Contractor shall carry out a program of quality assurance in accordance with the requirements of MIL-Q-9858, in which the reliability requirements shall govern the certification of the quality in all cases where the reliability of the equipment is effected.

1.2.3 Contract Data Preparation. The Contractor shall perform all activities required for the preparation of reports, proposals, bills of material, and other publications associated with the Samos Program. Specifications for the contract period covered by this Work Statement shall be as defined in LMSD-445087, "Specification Program for Satellite Systems," dated 1 November 1959, and shall be submitted in accordance with LMSD-6246F, "Specification Submittal Requirements for Discoverer, MIDAS, and Sentry Programs," dated 1 November 1959. Report requirements for the contract period covered by this Work Statement shall be in accordance with AFBM 58-1 Exhibit, dated 17 November 1958, including all amendments through 7 August 1959, as defined in the schedule for report submittal of this contract except for the following deviations:

a. Standard size 8 inches by 10-1/2 inches or the alternate size 8-1/2 inches by 11 inches for Contract Status Reports, Technical Operating Reports, and Technical Documentary reports. Fold-out inclosures may be used as necessary. Specific deviations may be required for LMSD reports where the content of the report in primarily large charts, graphs, etc.

b. LMSD report submittals shall retain their present cover paper substance.

c. The type of binding and/or fastening for all LMSD report submittals shall be at the option of LMSD. Comb binding shall be utilized, where practicable, until existing stocks are exhausted.

d. Catalog cards shall not be included in LMSD report submittals.

2-1-7

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

e. The following reports shall be submitted monthly, under one cover, (LMSD/2800) in accordance with Paragraph 2, Chapter I, of AFBM 58-1 Exhibit:

- (1) Program Progress Report
- (2) Facility Progress Report
- (3) Production Analysis Report

f. The following reports shall be submitted monthly, under one cover, in accordance with Paragraph 2, Chapter I, AFBM 58-1 Exhibit:

- (1) Funding Status Report
- (2) Manpower Status Report

g. The following reports shall be submitted quarterly, under one cover, in accordance with Paragraph 2, Chapter I, AFBM 58-1 Exhibit:

- (1) Program Progress Report
- (2) Facility Progress Report

h. The following reports shall be submitted quarterly, under one cover, in accordance with Paragraph 2, Chapter I, AFBM 58-1 Exhibit:

- (1) Financial Status Report
- (2) Manpower Status Report

1.3 Personnel (Subsystem K).

1.3.1 Human Engineering. The Contractor shall conduct human engineering activities in accordance with Paragraph III B, Tab 5, Section 1.

1.3.2 Personnel Requirements. In accordance with Paragraph III C, Tab 5, Section 1, the Contractor shall define research and development position types, manning requirements, and Air Force personnel phasing schedules for research and development participation; develop Air Force QPRI and Air Force personnel phasing schedules for the operational program; provide data as required for the development of technical manuals and training standards.

2-1-8

1.3.3 Training. In accordance with Paragraph III D, Tab 5, Section 1, the Contractor shall develop and conduct individual, unit, and system training to meet contractor operator/maintenance personnel requirements; provide for Air Force operator/maintenance personnel participation in the Samos Research and Development Program as agreed with AFBMD; conduct on-site analyses of training, training devices/aids requirements, personnel proficiency analyses necessary for Samos research and development manning; study the feasibility of using simulation techniques for Samos personnel; develop suitable techniques and equipment to develop, maintain, and evaluate Samos research and development personnel proficiency; assess the implications of developing an Air Force instructor capability during Samos Research and Development Program.

1.3.4 Technical Manuals and Job Aids. In accordance with Paragraph III E, Tab 5, Section 1, the Contractor shall provide Utility (Class III) and Interim (Class II) manuals; provide conventional or specialized job aids to ensure personnel proficiency; test and evaluate the provided manuals and job aids including surveillance of manual uses to ensure that graphic materials provided for Interim manuals will be suitable for the production of static and/or animated transparencies.

1.4 Flight Test and Operations

1.4.1 Flight Test Planning and Evaluation. The Contractor shall prepare test plans and establish overall requirements for Samos flight tests at Vandenberg AFB. Flight test data shall be prepared for each installation and launch, shall be kept current, and shall consist of the following:

<u>TITLE</u>	<u>REQUIREMENT</u>	<u>SUBMITTAL</u>
Data and Support Requirements	for each portion of the program	1 year prior to initial launch of each portion
Systems Operation Plan	for each portion of the program	6 months prior to initial launch of each portion
Flight Termination System Report	for the entire program	6 months prior to first launch
Detailed Test Objectives	for each flight	90 days prior to launch
System Test Directive	for each flight	30 days prior to launch
Range Safety Trajectory and Analysis Report	for each flight	30 days prior to launch

~~SECRET~~

LMSD-445160-B

<u>TITLE</u>	<u>REQUIREMENT</u>	<u>SUBMITTAL</u>
Preliminary Countdown Manual	for each portion of the program	6 months prior to first launch of each portion
Final Countdown Manual	for each flight	15 days prior to launch
Flight Test Directive	for each flight	30 days prior to launch
Pad Safety Report	for the entire program	30 days prior to first launch
Preliminary System Test Report	for each flight	7-10 days after launch
Launch Pad Damage Report	for each flight	7 days after launch
Final Launch Report	for each flight	15 days after launch
Performance Analysis Report	for each flight	30 days after launch
Systems Test Evaluation Report	for each flight	45 days after launch and every 30 days thereafter during active orbital life
Systems Test Evaluation Summary Report	for the entire program	Semiannually; 45 days after end of June and December of each year

1.4.2 Launch Bases

1.4.2.1 Facilities Design and Modification. The Contractor shall develop design criteria and monitor facility design and modifications to Government-furnished facilities included in Paragraphs 1.4.2.2 and 1.4.2.3 required to support the Samos Program.

1.4.2.2 Activation. The Contractor shall activate and maintain launch base operations required for the R&D phase of the Samos Program at Vandenberg AFB up to the time of first launch at the launch base, using the facilities described in Tab 4, Section 1. In support of the activation effort, the Contractor shall conduct modifications, assembly, and check-out of ground systems and facility test vehicles; receive, operate, maintain, and calibrate all GFE and GFP as required; and provide engineering

2-1-10

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

services and coordinate changes initiated at Sunnyvale. The Contractor shall activate base test operations and provide routine facility maintenance at the launch base specified in Paragraph III-C2, Tab 1, Section 1, up to the time of first launch, in support of the launch plan for the R&D phase of the Samos Program as shown in Tab 7, Section 1. Minor facilities modifications shall be accomplished by the Contractor, after approval by AFBMD, where necessary to provide for equipment installation or operation improvement.

1.4.2.3 Operation. The Contractor shall operate and maintain launch base operations required for the R&D phase of the Samos Program at Vandenberg AFB after the time of first launch at the launch base using the facilities described in Tab 4, Section 1, and will perform the flight test planning and coordination required prior to first launch, and shall receive and check out flight test vehicles prior to first launch. In support of the operation effort the Contractor shall after first launch conduct modifications, assembly, and checkout of ground systems and test vehicles; accomplish flight test operations; receive, operate, maintain, and calibrate all GFE and GFP as required; provide engineering services and coordinate changes initiated at Sunnyvale; and perform planning and coordination for conducting flight tests. The Contractor shall perform test base operations and provide routine facility maintenance at the launch base specified in Paragraph III-C2, Tab 1, Section 1, after the time of first launch at the launch base, in support of the launch plan for the R&D phase of the Samos Program as shown in Tab 7, Section 1. Minor facilities modifications shall be accomplished by the Contractor, after approval by AFBMD, where necessary to provide for equipment installation or operation improvement.

1.4.3 System Ground and Flight Test Data Reduction. The Contractor shall perform the reduction of data derived from all Samos vehicle and payload systems ground tests at Santa Cruz Test Base and flight test programs. Local facilities for the reduction of metric data shall be utilized at VAFB to the maximum extent practicable.

1.4.4 Logistics. The Contractor shall operate and maintain logistic support for the flight test operations of the Samos Program as specified in Tab 6 of Section 1.

1.4.5 Control Centers

1.4.5.1 Facilities Design and Modifications. The Contractor shall develop design criteria and monitor facility design and modifications to Government-furnished facilities included in Paragraph 1.4.5.2.1 required to support the Samos Program.

2-1-11

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

1.4.5.2 Activation and Operation

1.4.5.2.1 Vandenberg Control Center, Vandenberg AFB.

1.4.5.2.1.1 Activation. The Contractor shall activate the Vandenberg Control Center specified in Paragraph III-C7, Tab 1, Section 1, up to the time of first launch, for the required monitoring and coordinating support of the Development Control Center. During the period of activation, the Contractor shall provide routine facility maintenance; and shall accomplish minor facilities modifications, after approval by AFBMD, where necessary to provide equipment installation or operation improvement.

1.4.5.2.1.2 Operation. The Contractor shall operate the Vandenberg Control Center specified in Paragraph III-C7, Tab 1, Section 1, after the time of first launch, for the required monitoring and coordinating support of the Development Control Center. During the period of operation, the Contractor shall provide routine facility maintenance; and shall accomplish minor facilities modifications, after approval by AFBMD, where necessary to provide for equipment installation or operation improvement.

1.5 General Manufacturing

1.5.1 Tooling and Special Test Equipment

1.5.1.1 Vehicle Equipment. The Contractor shall provide Tooling and Special Test Equipment, including jigs, fixtures, and special test equipment necessary to fabricate, assemble, and check out complete flight vehicles at a flight vehicle delivery rate of two flight vehicles per month.

1.5.1.2 Ground Equipment. The Contractor shall provide Tooling and Special Test Equipment, including jigs, fixtures, and special test equipment necessary to fabricate, assemble, and check out complete ground equipment.

1.5.1.3 Tooling and Special Test Equipment Maintenance. The Tooling and Special Test Equipment maintenance specified in Paragraph 1.5.1 shall be maintained by the Contractor. Modifications to this tooling and special test equipment shall be accomplished to effect authorized vehicle and ground equipment configuration changes.

1.5.2 Manufacturing Aid (Mockup) and Display Model

1.5.2.1 Vehicle. The Contractor shall construct and maintain to the latest vehicle configuration a manufacturing aid (mockup) in which the external envelope of all airborne subsystems, as applicable, shall be

2-1-12

~~SECRET~~

~~SECRET~~

LMSD-445160-B

simulated. Any display models required for development of the Samos Program shall also be furnished. The Contractor shall construct and maintain to the latest vehicle configuration a dynamic simulation vehicle consisting of all components interconnected by the vehicle electrical harness. The dynamic simulation vehicle shall utilize operating components, interconnected by the vehicle cabling specified for the given configuration. Vehicle dynamic simulation test equipment, including subsystem and system checkout equipment, shall be considered part of the dynamic simulation vehicle operation. The Contractor shall also design and construct scale models, sand table models, and mockups required for design aids and evaluations.

1.5.2.2 Ground Equipment. The Contractor shall construct, as necessary, all mockups, sand table models, scale models, and display models of support equipment required in the development of the ground equipment complex of the Samos Program.

1.5.3 Manufacturing Services

1.5.3.1 Vehicle and Ground Equipment. In support of the effort described in Paragraphs 1.5.1.1, 1.5.1.2, and subsequent hardware paragraphs, the Contractor shall provide such manufacturing services as production control, tool and vehicle planning, process engineering, and manufacturing area engineering required by the Samos Program.

2-1-13

~~SECRET~~

~~SECRET~~

LMSD-445160-B

required by configuration changes, flight objectives, and/or experimental flight test data. The major areas of effort shall be concerned with the design of airframe structures, equipment installation, pressure vessels, and propellant tanks. The Contractor shall investigate the application of the increased propellant carrying capability (for restart) developed in the Discoverer Program with the view of utilizing this capability to improve Samos vehicle performance for optimum accomplishment of the Samos mission. The results of these investigations will be reported to AFBMD. In support of the development effort, the Contractor shall provide technical direction; perform structures analyses, aerodynamic, aerothermal, and performance studies; and liaison and coordination with other subsystems to insure proper design interface. The Contractor shall conduct feasibility and design studies for state-of-the-art subsystem development to provide progressive improvement of reliability, capability, and operational simplicity.

2.2.1.2 Test. The Contractor shall program, conduct, and analyze results of development, qualification, and inspection testing of airframe subsystem components required by the Samos Program. This testing shall encompass such activities as investigation of basic material properties, structural surveys for the vehicle airframe, and component evaluation.

2.2.2 Hardware

2.2.2.1 Fabrication and Assembly. The Contractor shall provide material procurement, fabrication, and assembly of sufficient sets of airframe subsystem components to support the delivery schedule for vehicles, Tab 2 of this Section.

2.3 Subsystem B

2.3.1 Development

2.3.1.1 Analysis and Design. The Contractor shall provide the Samos vehicle propulsion subsystem defined in Tabs 1 and 2 of Section 1, and develop and integrate modifications required by configuration changes, flight objectives, and/or experimental flight test data. The Contractor shall investigate the application of the restart engine developed in the Discoverer Program with the view of utilizing this capability to improve Samos vehicle performance for optimum accomplishment of the Samos mission. The results of these investigations will be reported to AFBMD. In support of the development effort, the Contractor shall provide technical direction and monitoring of subcontracts efforts; and development of an orbital velocity adjustment system. The Contractor shall conduct feasibility and design studies for state-of-the-art subsystem development to provide progressive improvement of reliability, capability, and operational simplicity.

2-1-15

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

2.3.1.2 Test. The Contractor shall program, conduct, and analyze results of development, qualification, and inspection testing of propulsion subsystem components required by the Samos Program.

2.3.2 Hardware

2.3.2.1 Fabrication and Assembly. The Contractor shall provide material procurement, fabrication, and assembly of sufficient sets of propulsion subsystem components to support the delivery schedule for vehicles, Tab 2 of this Section.

2.4 Subsystem C

2.4.1 Development

2.4.1.1 Analysis and Design. The Contractor shall provide the vehicle-borne auxiliary power subsystem for the Samos Program defined in Tabs 1 and 2 of Section 1, and develop and integrate modifications required by configuration changes, flight objectives, and/or experimental flight test data. This responsibility includes design and development of the complete vehicle wiring harness, including the destruct system, pyrotechnic systems, and preparation of an electrical schematic diagram of the vehicle and ground support equipment. Since the active lifetimes specified in Table I, Tab 2, Section 1, cannot be realized with battery energy sources, the Contractor shall develop longer-life sources as follows:

2.4.1.1.1 Solar Power. The Contractor shall develop solar power supplies to supplement or replace batteries, adapting or revising similar designs evolved under the MIDAS Program. Analysis and testing shall be conducted to establish at the earliest possible date the reliability, environmental endurance, and vehicle compatibility of such supplies.

2.4.1.1.2 Nuclear Power. Until it is clear that requirements can be more advantageously met with solar power, nuclear power alternatives shall be pursued. In conjunction with the Atomic Energy Commission and its contractors responsible for development of space nuclear auxiliary power under the SNAP program, the Contractor shall develop plans for utilization of appropriate SNAP units identified below. The Contractor shall develop integration schedules for these units consistent with their estimated availability for operational use from the AEC. The Contractor shall prepare preliminary vehicle designs to meet prescribed Samos missions and incorporating SNAP power sources. Designs shall be sufficiently complete to show firm compatibility between vehicle, SNAP unit, and payload, including approximate weight, configuration, and placement of shielding. Factory-to-flight sequences, count-down procedures, and radiological safety programs shall be worked out in detail. Facilities

2-1-16

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

essential for nuclear operations shall be identified and, upon AFBMD approval, architectural and engineering work shall be initiated. It is not intended that specialized vehicles or facilities be constructed, however, until the competitive status of solar and the several nuclear power approaches have been more clearly established and until specifically authorized by AFBMD. Following are the SNAP units to which this work statement applies:

2.4.1.1.2.1 SNAP X

2.4.1.1.2.2 SNAP II

2.4.1.1.2.3 SNAP IA

2.4.1.1.3 Fuel Cell. Fuel cell systems offer marked advantages over batteries in specific energy capacity, and over solar supplies in unit cost and sustained high power. Accordingly, the Contractor shall initiate development of a prototype APU to meet Samos missions up to 120 days in duration, including the reaction chamber, fuel storage, and system controls. Preliminary design of a vehicle to incorporate this APU will be initiated, but vehicle hardware construction will not be undertaken.

2.4.1.2 Test. The Contractor shall program, conduct, and analyze results of development, qualification, and acceptance testing of auxiliary power subsystem components required by the Samos Program.

2.4.2 Hardware

2.4.2.1 Fabrication and Assembly. The Contractor shall provide material procurement, fabrication, and assembly of sufficient sets of auxiliary power subsystem components to support the delivery schedule for vehicles, Tab 2. of this Section.

2.5 Subsystem D

2.5.1 Development

2.5.1.1 Analysis and Design. The Contractor shall provide the guidance and flight control subsystem for the Samos Program defined in Tab 2. of Section 1, and develop and integrate modifications required by configuration changes, flight objectives, and/or experimental flight test data. The Contractor shall provide technical direction, monitoring of subcontract and associate contract efforts, and liaison and coordination with other subsystems to insure proper design interface. In support of the development effort the Contractor shall: (1) conduct feasibility and design studies for state-of-the-art subsystem development and modification and provide

2-1-17

~~SECRET~~

~~SECRET~~

LMSD-445160-B

progressive improvement of reliability, capability, and operational simplicity such as: replacement of rate gyros with rate circuits, substitution of hydraulic motor/pump unit for the electro-hydraulic unit, repackaging of the computer, and modification of the flight control electronics to insure proper control system dynamic response; (2) monitor and support the associate contractor in developing an orbital reaction wheel attitude control system and perform the necessary engineering to integrate this device into the Guidance and Control Subsystem; (3) monitor subcontractor's efforts in the development of advanced components such as: the horizon sensor, velocity meter, and the reaction wheel orbital attitude control system; (4) provide necessary readout equipment for orbital attitude information; and (5) monitor the development of the guidance equations for booster guidance and insure the proper guidance interface between booster and satellite vehicle.

2.5.1.2 Test. The Contractor shall direct, coordinate and/or conduct development, qualification, inspection and acceptance testing of the guidance and flight control subsystem components required by the Samos Program in accordance with applicable specifications and procedures as listed in Guidance and Control Subsystem Specifications, Samos Program.

2.5.2 Hardware

2.5.2.1 Fabrication and Assembly. The Contractor shall provide material procurement, fabrication, and assembly of sufficient sets of guidance and flight control subsystem components to support the delivery schedule for vehicles, Tab 2 of this Section.

2.6 Subsystem E

2.6.1 Development

2.6.1.1 Analysis and Design. The Contractor shall provide the visual reconnaissance subsystem for the Samos Program defined in Tabs 1 and 2 of Section 1, and develop and integrate modifications required by configuration changes, flight objectives, and/or experimental flight test data. The Contractor shall provide technical direction, monitoring of subcontract effort, and liaison and coordination with other subsystems to insure proper design interface.

2.6.1.1.1 Vehicle Reconnaissance Equipment. The vehicle-borne and ground equipment shall be designed to have maximum compatibility with all planned visual reconnaissance payloads. The vehicle equipment described herein will be designed to meet the requirements of the specifications for the E-1 and E-2 payloads, as applicable, and shall consist of the following:

2-1-18

~~SECRET~~

~~SECRET~~

LMSD-445160-B

2.6.1.1.1.1 Vehicle Camera. The Contractor shall design and develop the vehicle camera described in Paragraph I-A-1-b(1)(a)(i) of Tab 1 of Section 1.

2.6.1.1.1.2 Vehicle Processor. The Contractor shall design and develop the vehicle processor described in Paragraph I-A-1-b(1)(a)(ii) of Tab 1 of Section 1.

2.6.1.1.1.3 Vehicle Readout. The Contractor shall design and develop the vehicle readout mechanism described in Paragraph I-A-1-b(1)(a)(iii) of Tab 1 of Section 1.

2.6.1.1.1.4 Vehicle Control and Transport Equipment. The Contractor shall design and develop the vehicle control and transport equipment described in Paragraph I-A-1-b(1)(a)(iv) of Tab 1 of Section 1.

2.6.1.1.2 In support of the development effort the Contractor shall:

2.6.1.1.2.1 Conduct a study program directed toward the development of a visual reconnaissance payload (E-3) capable of providing 5-foot ground resolution. The use of both film and electromagnetic recording will be considered in the determination of the optimum technical approach.

2.6.1.1.2.2 Perform operational and systems analyses to determine design criteria for reconnaissance equipment.

2.6.1.1.2.3 Establish technical requirements of the wide-band data link of Subsystem H which will be testing those models and assemblies required for equipment design criteria.

2.6.1.1.2.4 Conduct an experimental photo program for the purpose of simulating the quality output of the Visual Reconnaissance Subsystem. The simulated photography will be of such quality that its analysis will enable the production of useful design criteria for Subsystem E. The photography will also be made available, for interpretation use, by the Data Processing Subsystem.

2.6.1.1.2.5 Conduct feasibility and design studies for state-of-the-art subsystem development to provide progressive improvement of reliability, capability, and operational simplicity. The scope of such studies will be limited to the use of photographic film as a vehicle recording medium.

2.6.1.1.2.6 Investigate the possible installation of a flashing light on the vehicle for the purpose of improving tracking and thus location information. This effort will assure the use of available optical track equipment

2-1-19

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

~~SECRET~~

LMSD-445160-B

or establishment of the optical track equipment by other agencies. The results of such investigations should also provide a quantitative evaluation of the expected accuracy of location predication within the normal Samos operating altitudes and eccentricities.

2.6.1.1.2.7 Conduct system studies and special studies, as appropriate, in such component areas as improved image pick-up tubes, electrostatic and/or electromagnetic view data storage devices, and wide-band video and radio frequency amplifiers.

2.6.1.2 Test. The Contractor shall program, conduct, and analyze results of development, qualification, and inspection testing of visual reconnaissance subsystem components required by the Samos Program.

2.6.2 Hardware

2.6.2.1 Fabrication and Assembly. The Contractor shall provide material procurement, fabrication, and assembly of sufficient sets of visual reconnaissance subsystem components to support the delivery schedule for vehicles, Tab 2 of this Section.

2.7 Subsystem F

2.7.1 Development

2.7.1.1 Analysis and Design. The Contractor shall provide the electronics reconnaissance subsystem for the Samos Program defined in Tabs 1 and 2 of Section 1, and develop and integrate modifications required by configuration changes, flight test objectives, and/or experimental flight test data. The Contractor shall provide technical direction, monitoring of subcontract effort, and liaison and coordination with other subsystems to insure proper design interface. In support of the development effort, the Contractor shall perform intelligence analyses, operations and systems analyses, evaluation and development of advanced electronic reconnaissance techniques, and studies and analyses for advanced ferret equipment requirements. The Contractor shall conduct feasibility and design studies for state-of-the-art subsystem development to provide progressive improvement of reliability, capability, and operational simplicity.

2.7.1.2 Test. The Contractor shall program, conduct, and analyze results of development, qualification, and inspection testing of electronic reconnaissance subsystem components required by the Samos Program.

2.7.2 Hardware

2.7.2.1 Fabrication and Assembly. The Contractor shall provide material procurement, fabrication, and assembly of sufficient sets of electronic

2-1-20


LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

LMSD-445160-B

~~SECRET~~



LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

reconnaissance subsystem components to support the delivery schedule for vehicles, Tab 2 of this Section.

2.8 This paragraph in standard format not applicable.

2.9 Subsystem H. No effort for this subsystem is included herein. This effort is included in LMSD-445655.

2.10 Subsystem L.

2.10.1 Development

2.10.1.1 Analysis and Design. The Contractor shall provide the recovery capsule subsystem defined in Tab 2 of Section 1. In support of the development effort, the Contractor shall perform a recovery system analysis, provide technical direction and monitoring of subcontract effort, and provide liaison and coordination with other subsystems to insure proper design interface. Also the Contractor shall conduct a program leading to the development of a prototype operational system for air-to-air recovery utilizing C-130 aircraft.

2.10.1.2 Test. The Contractor shall program, conduct, and analyze results of development, qualification, and inspection testing of recovery capsule subsystem components. The test program shall include recovery system component field tests, recovery system demonstrations and rehearsals, and C-130 evaluation as pick-up aircraft using dummy capsules.

2.10.2 Hardware

2.10.2.1 Fabrication and Assembly. The Contractor shall provide material procurement, fabrication, and assembly of sufficient sets of recovery capsule subsystem components to support the delivery schedule, Tab 2 of this Section.

3.0 GROUND EQUIPMENT

3.1 Ground Support Equipment

3.1.1 Development

3.1.1.1 Analysis and Design. The Contractor shall provide the items of ground support equipment required for the Samos Program defined in Paragraph III-B, Tab 3 of Section 1, and listed in Paragraphs 8.3 through 8.7, Tab 5, Section 2. This equipment shall be redesigned or modified

2-1-21

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

as required to accommodate field conditions and/or vehicle changes. In support of the development effort, the Contractor shall provide technical direction, monitoring of subcontract effort, and liaison and coordination with other subsystems to insure proper design interface. The Contractor shall conduct feasibility and design studies for state-of-the-art subsystem development to provide progressive improvement of reliability, capability, and operational simplicity.

3.1.1.2 Test. The Contractor shall program, conduct, and analyze results of development, qualification, and inspection testing of ground support equipment required by the Samos Program.

3.1.2 Hardware

3.1.2.1 Fabrication and Assembly. The Contractor shall provide material procurement, fabrication, assembly, maintenance, and repair of the items and quantities of ground support equipment required by the readout portion of the Samos Program and listed in Paragraphs 8.3 through 8.7, Tab 5 of this Section.

3.2 Satellite Ground Control Equipment

3.2.1 Development

3.2.1.1 Analysis and Design. The Contractor shall provide the satellite ground control equipment required for the Samos Program defined in Tab 3 of Section 1 and as listed in Paragraph 8.8, Tab 5, Section 2. The equipment shall be redesigned or modified as required to accommodate field conditions and/or changes in flight objectives. In support of the development effort, the Contractor shall provide technical direction, monitoring of subcontract effort, and liaison and coordination with other subsystems to insure proper design interface. The Contractor shall prepare and submit to AFBMD for approval a Samos Program Communications Plan. The Contractor shall conduct feasibility and design studies for state-of-the-art subsystem development to provide progressive improvement of reliability, capability, and operational simplicity.

3.2.1.1.1 Visual Reconnaissance Equipment. The vehicle-borne and ground equipment shall be designed to have maximum compatibility with all planned visual reconnaissance payloads. Ground equipment, in particular, shall be designed to be compatible with a variety of payloads. The ground equipment described herein will be designed to meet the requirements of both the specifications for the E-1 and E-2 payloads to the maximum extent possible and shall consist of the following:

2-1-22

~~SECRET~~

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

3.2.1.1.1.1 Ground Reconstruction Equipment and Monitor (Primary Record). The Contractor shall design and develop the ground photo reconstruction and processing equipment described in Paragraph 1A1b(1)(a)(v) of Tab 1 of Section 1 and provide primary record photographs and associated auxiliary data to Subsystem L. The number of photographs and the type of the data will be influenced by a number of factors but will be determined under the requirements of Paragraph 1.2.1.4. The time delay from readout of the vehicle to receipt of the data by Subsystem I will be kept to a minimum.

3.2.1.1.2 Visual Reconnaissance Development Effort Support. In support of the development effort, the Contractor shall:

3.2.1.1.2.1 Develop equipment, techniques, and procedures for monitoring and evaluating the quality of the system output to:

- a. Check system operation and compare the results with performance requirements.
- b. Evaluate the results in order to consider redesign of equipment for future vehicles.
- c. Provide for programming and control of future data acquisition cycles.
- d. Determine that the vehicle and orbit data accuracy is sufficient to meet the location requirements of the system. Maximum use should be made of data available from Subsystem I in the performance of the above functions.

Equipment to be used for development purposes which does not have a function in the operational system should be set up to handle only selected system output. Automatic features should not be included in items which have the "off line" function of performing system check for development purposes. Examples of the "in line" functions which are a Subsystem I responsibility are:

- a. Reassembly of the primary record photographs.
- b. Rectification of photographs to vertical or grid system.
- c. Reading of time and attitude from the primary record.
- d. Ground check point positioning of collected data.

3.2.1.1.2.2 Develop or adapt from existing equipment such photographic viewing, processing, and handling equipment required to perform the ground processes existing within Subsystem E.

2-1-23

~~SECRET~~

LMSD-445160-B

3.2.1.2 Test. The Contractor shall program, conduct, and analyze results of development, qualification, and inspection testing of satellite ground control equipment required by the Samos Program.

3.2.2 Hardware

3.2.2.1 Fabrication and Assembly. The Contractor shall provide material procurement, fabrication, assembly, maintenance, and repair of the items and quantities of the satellite ground control equipment required by the Samos Program and listed in Tab 5 of this Section.

4.0 SPARES

4.1 Vehicle Equipment. The Contractor shall provide vehicle equipment spare parts in quantities sufficient to support the flight test program of the Samos Program. Spares lists will be generated as a result of the logistics effort described in Tab 6, Section 1.


4.2 Ground Equipment. The Contractor shall provide ground equipment spare parts in quantities sufficient to support the flight test program of the Samos Program. Spares lists will be generated as a result of the logistics effort described in Tab 6, Section 1.

2-1-24

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

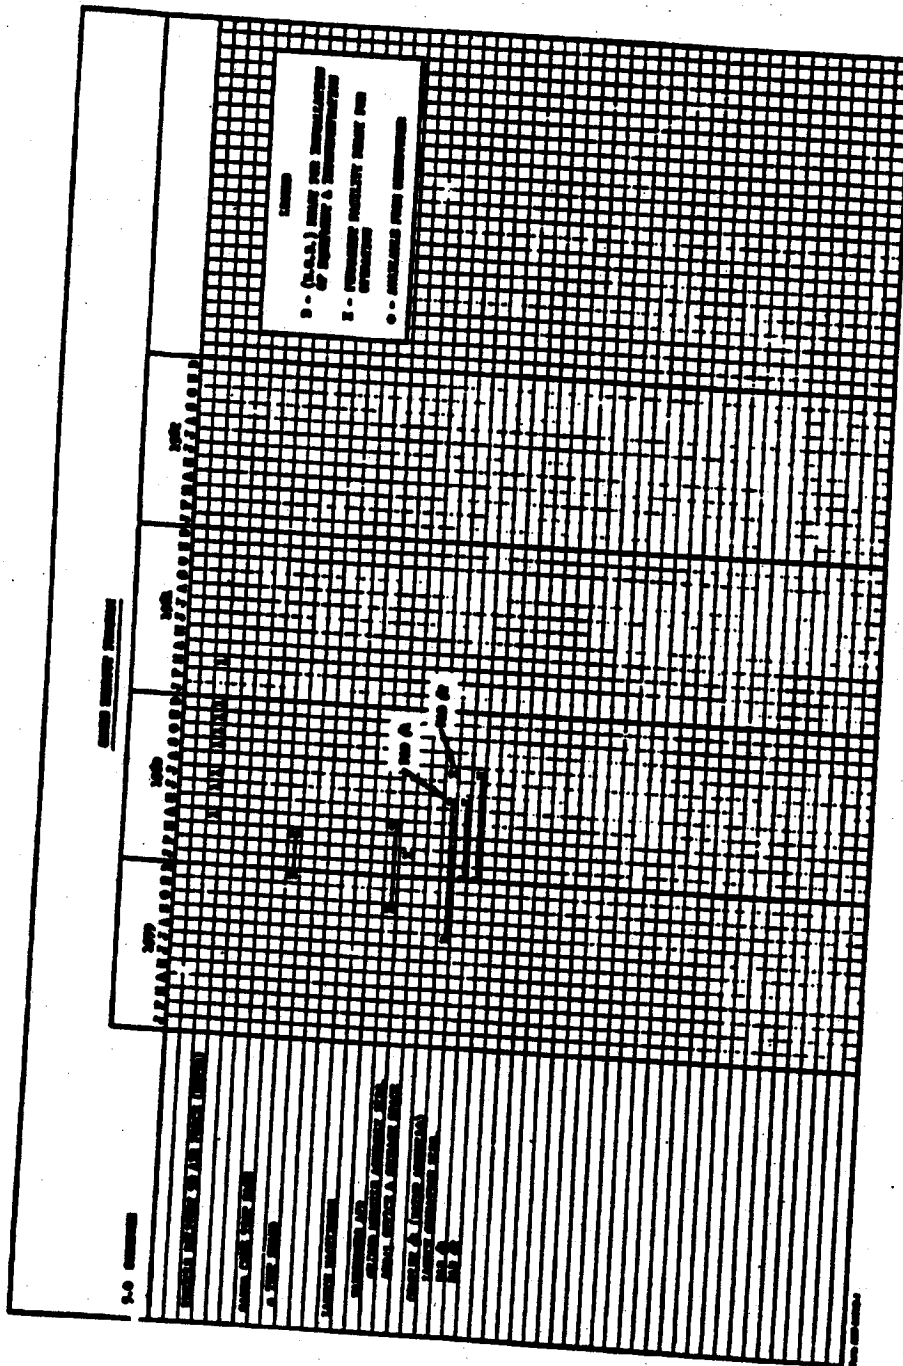

2-2-1

~~SECRET~~**6.0 SUMMARY OF ITEMS TO BE FURNISHED**

The following items shall be furnished during the contract period from the completion of the Samos portion of Contract AF 04(647)-97 through 31 March 1961, except as noted otherwise.

6.1 The Contractor shall complete fabrication and testing and make constructive delivery of the following satellite vehicles* to the extent herein specified.

6.1.1 Flight Test Vehicles. Flight test vehicle schedules are shown in Tab 2 of this document, and are referenced below in separate sequences for the Samos Program.

6.1.1.1 Readout Series

6.1.1.1.1 Seven flight test vehicles shall be delivered to Vandenberg AFB and expended in flight tests.

6.1.1.1.2 One flight test vehicle (FTV 8) shall be forty-nine percent through launch base operations.

6.1.1.1.3 One flight test vehicle (FTV 9) shall be ninety-five percent through modification and checkout operations at the Contractor's facility at Sunnyvale.

6.1.1.1.4 Four flight test vehicles shall be in various stages of manufacturing completion at the Contractor's facility at Sunnyvale; FTV 10 shall be 75 percent through final assembly operations; FTV 11 shall be 100 percent through subassembly operations**; FTV 12 shall be 25 percent and FTV 13 shall be 20 percent through fabrication operations***.

6.1.1.2 Recovery Series

6.1.1.2.1 One flight test vehicle (FTV 1) shall be sixty-five percent through modification and checkout operations at the Contractor's facility at Sunnyvale.

*Satellite vehicles are defined herein to be inclusive of all vehicle structural elements, all vehicle-borne equipment elements except vehicle-borne communications equipment, and spare parts therefor which are deemed necessary by the Contractor for the fulfillment of the various flight missions as presented in Tables I and II, Tab 1 of Section 1, or for the attainment of non-flight objectives of the developmental test programs.

**Subassembly operations are exclusive of pre-mate.

***Fabrication operations apply only to the fabrication span prior to start of subassembly operations.

2-3-1

~~SECRET~~

~~SECRET~~

LMSD-445160-B

7.0 GOVERNMENT-FURNISHED EQUIPMENT, FACILITIES, AND SERVICES

The Government shall furnish equipment in accordance with Paragraph 7.3, and facilities, and services as described herein:

7.1 The following Government-furnished facilities shall be required and shall be available and ready as herein indicated:

- a. Vandenberg AFB Missile Assembly Building - Complete as a permanent facility
- b. Vandenberg AFB additional office and storage space - Complete as a permanent facility
- c. Point Arguello Launch Complex 1 - Operable as a permanent facility
- d. Engineering and office space, plus necessary office furnishings and equipment at all sites
- e. Outdoor storage area at all sites
- f. Hazard storage area at all sites
- g. Shop and laboratory space, plus necessary machine and portable tools, laboratory and testing equipment, material handling equipment, and necessary installation costs at Vandenberg AFB.
- h. WADC environmental simulator
 - i. Sandia large centrifuge

7.2 The following Government-furnished services shall be required at the Government facilities in Paragraph 7.1.

- a. Equipment transportation to and from sites
- b. Use of military base services, when available, and in accordance with DOD policy as of 1 July 1959, such as mess, guard service, transportation, recreational facilities, utilities, fire protection, first-aid, and major maintenance services of buildings, grounds, and utilities.
- c. Ships, boats, aircraft, and related equipment required in support of recovery operations on re-entry capsules.

2-4-1

~~SECRET~~

LMSD-445160-B

7.3 GOVERNMENT-FURNISHED EQUIPMENT

ITEM NO.	QTY	DESCRIPTION - INCLUDE MFG. & MODEL NO.	DRAF STOCK NO.	NEED DATE
1	0	Delete		
2	0	Delete		
3	0	Delete		
4	0	Delete		
5	0	Delete		
6	1	Attitude Control Engng Model (MIT)	None	On Hand
7	1	Specifications & Drawings for Attitude Damping	None	On Hand
8	0	Delete		
9	0	Delete		
10	0	Delete		
11	A/R	Helium	GM6830-244-2745	As Required
12	0	Delete		
13	0	Delete		
14	3	Electrical & Pressure Test Unit (Bell)	6625-NL-117-800-001-1	On Hand
15	1	Component Test Stand (Bell)	6625-NL-117-800-002-1	On Hand
16	0	Delete		
17	0	Delete		
18	0	Delete		
19	0	Delete		

2-4-2

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

SECRET

LMSD-445160-B

7.3 GOVERNMENT-FURNISHED EQUIPMENT (Continued)

ITEM NO.	QTY	DESCRIPTION - INCLUDE MFG. & MODEL NO.	USAF STOCK NO.	NEED DATE
20	0	Delete		
21	0	Delete		
22	0	Delete		
23	1	Precision Optical Tractor (USN MK51 Mod 3 Gun Director, Modified) W/Camera N-9 (1 each) and Telescope M-17 (1 each)	ZX950-SK104541 6710-221-0811 1240-757-9914	On Hand
24	0	Delete		
25	0	Delete		
26	0	Delete		
27	0	Delete		
28	A/S	Boosters, EM-65, Complete W/Radio Guide	None	As Scheduled
29	A/S	Support Equip. for EM-65 (Sec)	None	As Scheduled
30	1	Tool, Mating Taps	3465-NL-7-73006	On Hand
31	0	Delete		
32	0	Delete		
33	0	Delete		
34	0	Delete		
35	0	Delete		
36	0	Delete		

2-4-3

LOCKHEED AIRCRAFT CORPORATION

SECRET

MISSILES and SPACE DIVISION

7.3 GOVERNMENT-FURNISHED EQUIPMENT (Continued)

ITEM NO.	QTY	DESCRIPTION - INCLUDE MFG. & MODEL NO.	USAF STOCK NO.	NEED DATE
37	0	Delete		
38	0	Delete		
39	0	Delete		
40	0	Delete		
41	10	Tuner TN-129B/APR-9	5895-519-4038A	On Hand
	2	TN-129D/APR-9	5895-611-2479A	On Hand
42	10	Tuner TN-131/APR-9	5895-338-4027A	On Hand
		TN131C/APR-9	5895-611-2481A	On Hand
43		Indicator, ID-226/APR-9	5895-698-3875A	On Hand
44	5	Power Supply, PP-336/APR-9	6130-307-3781	On Hand
45		Power Supply, PP-337B/APR-9	5895-611-2450A	On Hand
46	5	Mixer-Amplifier CY-43A/APR-9	5895-307-3779A	On Hand
47	5	Control, C-654/APR-9B	5895-338-1727A	On Hand
48	0	Delete		
49	1	Table, Work, Electronics Test and Maintenance	6625-NL	On Hand
50	0	Delete		
51	0	Delete		
52	3	Maintenance Platform, USAF B-1	1730-390-5618	On Hand
53	0	Delete		
54	0	Delete		

2-4-4

~~SECRET~~

LMSD-445160-B

7.3 GOVERNMENT-FURNISHED EQUIPMENT (Continued)

ITEM NO.	QTY	DESCRIPTION - INCLUDE MFG. & MODEL NO.	USAF STOCK NO.	NEED DATE
55	0	Delete		
56	0	Delete		
57	0	Delete		
58	0	Delete		
59	0	STL Guidance Equations for Atlas Flights	None	On Hand
60	0	Delete		
61	0	Computer Trays (Burroughs)	None	On Hand
62	0	Delete		
63	0	Delete		
64	0	Delete		
65	0	Delete		
66	0	Delete		
67	1	Gun Sight, USN Mk-15 Mod 15 (Spare)	ZX950-SK-166092	On Hand
68	1	Air Supply Unit, USN Mk. 1 Mod 0 (Spare)	ZX1220-210-4730	On Hand
69	1	Test Unit, USN Mk. 1 Mod 0 (Camera Checklight)	ZX950-SK-133121	On Hand
70	0	Delete	ZX1220-382-6117	On Hand
71	0	Delete	ZX950-SK-167933	On Hand

2-4-5

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

1JMSD-445160-B

7.3 GOVERNMENT-FURNISHED EQUIPMENT (Continued)

ITEM NO.	QTY	DESCRIPTION - INCLUDE MFG. & MODEL NO.	USAF STOCK NO.	NEED DATE
72	0	Delete		
73	0	Delete		
74	0	Delete		
75	0	Delete		
76	0	Delete		
77	3	Radar Training Set, AN/GFP-T1	6940-AN-GFP-T1A	On Hand
78	3	Mod Kit, MK-381/GFP - (P/O Item 77)	6940-626-8716	On Hand
79	3	Generator Set, Diesel FU-308/GFP W/Trailer V-109/GFP	6115-546-2146	On Hand
80	3	Truck, Van, M-109	2320-835-8515	On Hand
81	0	Delete		
82	0	Delete		
83	0	Delete		
84	0	Delete		
85	0	Delete		
86	0	Delete		
87	2	Body Assy, Camera, Type P-2 W/Lens	6720-907-7045	On Hand
88	2	Magazine, Film, 50 ft. (W/Ream 87)	6760-286-9064	On Hand

2-4-6

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

7.3 GOVERNMENT-FURNISHED EQUIPMENT (Continued)

ITEM NO.	QTY	DESCRIPTION - INCLUDE MFG. & MODEL NO.	USAF STOCK NO.	NEED DATE
89	4	Magazine, Film, 15 R. (W/Item 87)	6760-298-2182	On Hand
90	1	Alignment Unit, Camera Bore-sight	9DMX-202-08-46	On Hand
91	0	Delete		
92	0	Delete		
93	0	Delete		
94	1	Viewer, Still Picture, AR-10	6760-663-0981	On Hand
95	0	Delete		
96	0	Delete		
97	0	Delete		
98	0	Delete		
99	0	Delete		
100	0	Delete		
101	0	Delete		
102	0	Delete		
103	0	Delete		
104	0	Delete		
105	2	Antenna System, AN/TRC-8	5829-193-7106	On Hand
106	0	Delete		
107	0	Delete		

2-4-7

~~SECRET~~

7.3 GOVERNMENT-FURNISHED EQUIPMENT (Continued)

ITEM NO.	QTY	DESCRIPTION - INCLUDE MFG. & MODEL NO.	USAF STOCK NO.	NEED DATE
108	0	Delete		
109	0	Delete		
110	0	Delete		
111	0	Delete		
112	0	Delete		
113	0	Delete		
114	0	Delete		
115	0	Delete		
116	7	Heater, Aircraft Engine	4520-508-6496	On Hand
117	0	Delete		
118	1	Truck, Fire, CL 750	4210-142-2339	On Hand
119	1	Generator Set, 150 KW	6115-546-2167	On Hand
120	0	Delete		
121	0	Delete		
122	0	Delete		
123	0	Delete		
124	0	Delete		
125	0	Delete		
126	0	Delete		
127	0	Delete		
128	0	Delete		

~~SECRET~~

LMSD-445160-B

7.3 GOVERNMENT-FURNISHED EQUIPMENT (Continued)

ITEM NO.	QTY	DESCRIPTION - INCLUDE MFG. & MODEL NO.	UNAF STOCK NO.	NEED DATE
129	0	Delete		
130	0	Delete		
131	0	Delete		
132	0	Delete		
133	0	Delete		
134	0	Delete		
135	0	Delete		
136	0	Delete		
137	0	Delete		
138	0	Delete		
139	0	Delete		
140	0	Camera, Motion Picture	6780-977-9071	October 1959
141	0	Delete		
142	0	Delete		
143	0	Delete		
144	0	Delete		
145	0	Delete		
146	A/R	Gage, Gas Density	None	As Required
147	A/R	Detector, Cosmic Ray	None	As Required
148	A/R	Detector, Micro Meteorite	None	As Required
149	A/R	Radiometer	None	As Required

2-4-9

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

7.3 GOVERNMENT-FURNISHED EQUIPMENT (Continued)

ITEM NO.	QTY	DESCRIPTION - INCLUDE MFG. & MODEL NO.	USAF STOCK NO.	NEED DATE
150	A/R	Detector, Solar UV	None	As Required
151	A/R	Meter, Earth Electrical Field	None	As Required
152	A/R	Spectrometer, Mass	None	As Required
153	A/R	Magnetometer	None	As Required
154	0	Delete		
155	0	Delete		
156	0	Delete		
157	0	Delete		
158	0	Delete		
159	0	Delete		
160	0	Delete		
161	0	Delete		
162	0	Delete		
163	0	Delete		
164	0	Delete		
165	0	Delete		
166	0	Delete		
167	0	Delete		
168	0	Delete		
169	0	Delete		
170	0	Delete		

2-4-10

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

7.3 GOVERNMENT-FURNISHED EQUIPMENT (Continued)

ITEM NO.	QTY	DESCRIPTION - INCLUDE MFG. & MODEL NO.	USAF STOCK NO.	NEED DATE
171	0	Delete		
172	0	Delete		
173	0	Delete		
174	3	Ammeter, D. C., Dwg. ML7700683	6625-230-8457	On Hand
175	3	Bridge, Summation, Type AN/URM-23	6625-643-1857	October 1959
176	3	Test Set, Electron Tube, Type TV-2/U	6625-392-6997	October 1959
177	3	Wattmeter, Type No. 43	6625-649-5070	On Hand
178	3	Wattmeter, Type No. 43	6625-649-5399	October 1959
179	3	Coupler, Directional, Type AN/URM-60	5985-519-7433	October 1959
180	3	Coupler, Directional, Mod. 165Z	6625-544-8640	On Hand
181	3	Coupler, Directional, Mod. 150Z	5984-518-4763	On Hand
182	3	Coupler, Directional, Mod. 138Z	5985-518-4765	On Hand
183	3	Generator, Signal, Type AN/URM-26A	6625-643-1541	October 1959
184	3	Generator, Signal, Type AN/USM-44	6625-602-8503	October 1959
185	3	Generator, Signal, Type AN/URM-49	6625-539-8573	October 1959
186	3	Generator, Signal, Type AN/URM-61	6625-698-4899	October 1959

2-4-11

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

7.3 GOVERNMENT-FURNISHED EQUIPMENT (Continued)

ITEM NO.	QTY	DESCRIPTION - INCLUDE MFG. & MODEL NO.	USAF STOCK NO.	NEED DATE
187	3	Test Set, Radar, Type AN/UFM-56	6625-649-4379	October 1959
188	3	Multimeter, Type TS-505A/U	6625-504-2628	October 1959
189	3	Multimeter, Type AN/FDM-6	6625-643-1686	October 1959
190	3	Oscillator, Type TS-302/U	6625-557-0312	October 1959
191	3	Oscilloscope, Type AN/USM-24C	6625-649-2838	October 1959
192	3	Test Set, Crystal Unit, P.N AIL390A	6625-649-3060	October 1959
193	3	Test Set, Radio, Type AN/ARM-1	6625-240-1461	October 1959
194	0	Delete		
195	0	Delete		
196	0	Delete		
197	0	Delete		
198	0	Delete		
199	0	Delete		
200	0	Delete		
201	0	Delete		
202	0	Delete		
203	0	Delete		
204	0	Delete		

2-4-12

~~SECRET~~

~~SECRET~~

LMSD-445160-B

7.3 GOVERNMENT-FURNISHED EQUIPMENT (Continued)

ITEM NO.	QTY	DESCRIPTION - INCLUDE MFG. & MODEL NO.	USAF STOCK NO.	NEED DATE
205	0	Delete		
206	0	Delete		
207	0	Delete		
208	0	Delete		
209	0	Delete		
210	0	Delete		
211	0	Delete		
212	0	Delete		
213	0	Delete		
214	0	Delete		
215	0	Delete		
216	0	Delete		
217	0	Delete		
218	2	Maintenance Platform, USAF B-4	1730-390-5617	October 1959
219	1	Photo Processing Machine, EH-7A	6760-664-4110	On Hand
220	0	Delete		
221	0	Delete		
222	1	Test Set, Crystal Unit, TS-712/TSM	6625-553-7694	October 1959
223	A/R	Inhibited Red Fuming Nitric Acid (IRFNA)	9135-6810-209-2943	As Required

2-4-13

L. C. KENNEDY AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

7.3 GOVERNMENT-FURNISHED EQUIPMENT (Continued)

ITEM NO.	QTY	DESCRIPTION - INCLUDE MFG. & MODEL NO.	USAF STOCK NO.	NEED DATE
224	A/R	Unsymmetrical Dimethyl-hydrazine (UDMH)	9135-305-8199	As Required
225	0	Delete		
226	0	Delete		
227	0	Delete		
228	0	Delete		
229	0	Delete		
230	0	Delete		
231	0	Delete		
232	125	Drum, Propellant Storage	8110-625-8214	October 1959
233	3	Test Set, Radar, TS-147D/UP	6625-649-4524	October 1959
234	0	Delete		
235	0	Delete		
236	0	Delete		
237	3	Ground Power & Light Unit	Not Available	Nov 1959
238	0	Delete		
239	4	Trailer	Not Determined	October 1959
240	0	Delete		

2-4-14

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

8.0 GROUND EQUIPMENT.

8.1 The following items shall be used in development of the satellite vehicles and/or developed for use in support of checkout, transport, launch, and control operations.

2-5-1

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

Itemization	Total Quantity	YAF	S/A and Control Center	Remarks
8.2 This paragraph is standard	not applicable.			
8.3 GROUND HANDLING EQUIPMENT				
Adapter Handling Dolly	5	5		
Neo Case Handling Dolly	3	3		
Truck Handling Dolly	1	1		
Vehicle Handling Yoke	6	6		
Vehicle Handling Dolly	3	3		
Vehicle Transporter	4	4		
Vehicle Marking Equipment	1	1		
Vehicle Pitch and Roll Stand	1	1		
Vehicle Work Stand	1	1		
Fayload Handling Dolly	2	2		
Fayload Shipping Container	4	4		
Truck Handling Dolly (All Trucks)	2	2		
Engine Handling Dolly	2	2		
8.4 SERVICE EQUIPMENT				
Air Conditioning Trailer Type 14	1	1		
Engine Closure Plug (Set)	2	2		
Engine Service Tools (Set)	1	1		
Propellant Transfer (Set)	5	5		
Propellant Transport Trailer	3	3		
Vehicle Flushing Equipment	1	1		
Universal Coupling (Set)	5	5		
Service Bldg. Mechanical Equipment	1	1		

Itemization	Total Quantity	YAFB	V/A and Control Center	Remarks
8.4 SERVICE EQUIPMENT Air Conditioning System - Type 444	2	2		
One Preservation Equipment	2	2		
8.5 LAUNCH MONITOR AND CONTROL				
PAB 1 Launch Control Electrical Equipment				
Launch Office Building Electrical Equipment	1	1		
Control Group A - Guidance and Man.	1	1		
Control Group B - Prediction and Facilities	1	1		
Control Group C - Payload and Communications	1	1		
Control Group D - LMED Launch Controller	1	1		
Bank Set A - Main Patch	1	1		
Bank Set B - Countdown Check	1	1		
Bank Set C - Miscellaneous Equipment	1	1		
Bank Set D - Procedures	1	1		
Launch Pad and Service Building Electrical Equipment	1	1		
Bank Set A - Master Patch	1	1		

Item/Category	Total Quantity	YARS	V/A and Control Center	Remarks
8.5 LAUNCH MONITOR AND CONTROL (Continued)				
Each Set B - Remote Electrical Equipment	1	1		
Each Set C - Test Plug Equipment	1	1		
Launch Complex Cabling	1	1		
Detonator Monitor	1	1		
Squib Tester	1	1		
TV Systems	1	1		
RF Data Link	1	1		
8.6 SUBSYSTEM CHECKOUT EQUIPMENT				
8.6.1 This paragraph is retained herein as not applicable.				
8.6.2 Subsystem B				
Presentation & Testings Check-out Console - Leak Checker	2	2		
Mass Spectrometer - Leak Detector	2	2		
Propulsion System Check-out Console	2	2		
8.6.3 Subsystem G				
Auxiliary Power Check-out Unit	2	2		
Solar Collector Portable Check-out Unit, Type I	2	2		
Battery Discharge Load Tester	2	2		
Battery Console	2	2		
Dual Battery Charger	1	1		

~~SECRET~~

LMSD-445160-B

Item Name	Total Quantity	YARD	T/A and Control Center	Remarks
8.6 SUBSYSTEM CHECKOUT EQUIPMENT				
8.6.3 Subsystem C (Continued)				
Vehicle Power Monitor Console	2	2		
Secondary Battery Charger	2	2		
8.6.4 Subsystem D				
Flight Control C/O Console, Type II	1	1		
Flight Control Recorder Console	3	3		
Guidance C/O Console, Type II	1	1		
Attitude Dumper C/O Console, Type II	1	1		
Attitude Dumper Recorder Console	1	1		
High Pressure Nitrogen Test Cart	2	2		
Low Pressure Nitrogen Test Cart	2	2		
Hydraulic Test Cart	2	2		
Hydraulic Cleaner Cart	2	2		
Hydraulic Package Power Supply	2	2		
Guidance Loop Bench C/O Console	2	2		
IRP Holding Fixture, Type II	2	2		
Optical Alignment Equipment	2	2		
Horizon Scanner C/O Console, Type II	1	1		
IRP Standby Nest and C/O Console	1	1		

2-5-5

~~SECRET~~

LOCKHEED AIRCRAFT CORPORATION

MISSILES and SPACE DIVISION

~~SECRET~~

LMSD-445160-B

Item Name	Total Quantity	YATB	S/A and Control Console	Remarks
8.6 SUBSYSTEM CHECKOUT EQUIPMENT				
8.6.4 Subsystem D (Continued)				
Marium Recorder C/O Console	1	1		
Guidance Computer C/O Console	1	1		
SR/D Installation Test Console	2	2		
Secondary Junction Box C/O Console	1	1		
Roll/Drive Table	2	2		
Event Recorder Console	2	2		
8.6.5 Subsystem E				
E-1 Collimator	1	1		
E-2 Collimator, Type I	1	1		
E-2 Collimator, Type II	1	1		
E-1 Test Console	1	1		
E-2 Test Console	1	1		
E-1 Test Power Supply	1	1		
E-2 Test Power Supply	1	1		
Ground Reconstruction Console	1	1		
Primary Record Camera	1	1		
Primary Record Film Processor	1	1		
Primary Recorder Processor Support Equipment	1	1		
Primary Record Camera Test Equipment	1	1		
Primary Record Inspection Viewer	1	1		

2-5-6

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~CONFIDENTIAL~~

Itemization	Total Quantity	YAF	V/A and Control Cabinet	Remarks
8.6 SUBSYSTEM CHECKOUT EQUIPMENT				
8.6.5 Subsystem B (Continued)				
Auxiliary Ground Reconstruction Test Equipment	1			
Vacuum Test Chamber	1			
Microvols Calibration Equipment	1			
Pyrotest Test Equipment - Support Equipment	1			
SM/3 Optical Alignment Equipment	1			
2nd Product Quality Equipment	1			
8.6.6 Subsystem F				
SM/F - 1 Checkout Console	1			
SM/F - 2A Checkout Console	2			
SM/F - 3A Checkout Console	2			
F-1 Antenna Fixture Set	1			
F-2B Antenna-Fixture Set	1			
F-3A Antenna Fixture Set	1			
8.6.7 Subsystem L				
Instrumentation Van	1			
Auxiliary Power Unit (APU) Van	1			
SM/L Supporting C/O Equipment	1			
8.7 SYSTEMS CHECKOUT EQUIPMENT				
Vehicle Function Generator Console, Type II	1			

2-5-7

LOCKHEED AIRCRAFT CORPORATION

~~CONFIDENTIAL~~

MISSILES SUPPORT DIVISION

CONFIDENTIAL

LMSD-445160-B

Itemization	Test Quantity	YAF	T/A and Control Codes	Remarks
0.7 SYSTEMS CHECKOUT EQUIPMENT				
Telemetry Data Processing Console	1	1		
Systems Checkout Complex No. 4 (Receiver and Sum) 0.8 SATELLITE GROUND CONTROL EQUIPMENT	1	1		
Paragraphs 0.8.1 through 0.8.8 in attached format are not applicable.				
0.8.9 Payload Ground Equipment				
0.8.9.1 Visual Reconnaissance Equipment	4			
0.8.9.1.1 Radar Equipment	4			
Ground reconstruction electronics	2			
Repeater microscope equipment				
Operating console (including recorder & control panel)				
Primary record camera	6			
Primary record film processor	2			
Primary record compression viewer	2			
Primary record inspection viewer	2			
Special 35 MM viewer	2			
Cinegraph recording camera	2			
Primary record processor support equipment consisting of:				
Chemical mixing tank	2			
				This equipment will be used for the Recovery Program also.
				This equipment will be used for the Recovery Program also.

2-5-8

LOCKHEED AIRCRAFT CORPORATION

SECRET

MISSILES and SPACE DIVISION

CONFIDENTIAL

~~CONFIDENTIAL~~

Itemization	Total Quantity	YAF	WAF	W/A and Control Center	Remarks
0.0 SATELLITE GROUND CONTROL EQUIPMENT					
0.0.0.1.1 Rackless Equipment (Continued)					
Chemical storage tank	4			4	
Frames for residual type test	2			2	
Dip test dryer	2			2	
Film test tank	6			6	
Type W cores holder	4			4	
Dip test film holder	4			4	
Film reel rack	2			2	
Dip test wash rack	2			2	
0.0.0.1.2 Calibration and Checkout Equipment for Ground Equipment					
Auxiliary ground reconstruction electrical test equipment	2			2	
Primary record camera test equipment	2			2	
Electronic calibration unit, consisting of:					
Cable adapter (MIFCO power supply)	2			2	
Video test signal processor assembly	2			2	
0.0.0.2 Ferris Reconnaissance Equipment					

2-5-9

~~CONFIDENTIAL~~

~~SECRET~~

LMSD-445160-B

Item Description	Total Quantity	YAF	VIA and Control Center	Remarks
Nonrecurrent 6.9 SATellite Ground CONTROL EQUIPMENT (Continued) 6.9.2.1 F-3 Evaluation and Command Equipment consisting of the following units (modified systems will be required for use with the F-1A and again with F-1B flights): Digital data checker and checker Digital tape recorder and controls Scan conversion unit Video Unit T & A console Telemetry data unit Oscilloscope Digital data buffer and printer System test equipment Power supplies Command and data setting equipment Digital display logic unit 6.9.2.2 F-1 Data Conversion Equipment consisting of the following units: Tape transports (processors) Digital plug-in Power supplies Backs and cabling Signal reconstructor	2		2	

2-5-10

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISILES and SPACE DIVISION

CONFIDENTIAL

~~CONFIDENTIAL~~

LMSD-445160-B

~~SECRET~~

Itemization	Total Quantity	YAF	Q/A and Control Center	Remarks
6.6 SATELLITE GROUND CONTROL EQUIPMENT (Continued) Special test equipment Formatter Reader generator and time base 6.6.9.2.3 P-3 Converter and Substitution Equipment consisting of the following units (quantity unknown) will be required for use with P-28 and again with P-28 flight: Digital gun trigger and detector Digital tape recorder and controls System test equipment Power Supply Control panel (remote) Status panel (remote) Digital printer and controls Digital gun buffer and converter Books and catalogs 6.6.9.2.4 In-Flight Calibration Test AM/CPD-TA (G.P.E. Modified)				

2-9-11

~~CONFIDENTIAL~~

LOCKHEED AIRCRAFT CORPORATION

~~SECRET~~

MISSILES and SPACE DIVISION

~~CONFIDENTIAL~~

DEFENSE TECHNICAL INFORMATION CENTER
8725 Kingman Rd Ste 0944
 Ft Belvoir, VA 22060-6218

OFFICIAL BUSINESS - PENALTY FOR PRIVATE USE \$300
POSTMASTER: DO NOT FORWARD


AD Number	Class	Pages	Type Copy	Source	Priority
38883	C	108	H	F	

Received Date: 24-SEP-68

To : 13096
Req By : DELLA FOR HARRY WA
ATTENTION: D B HINESLEY

~~SAC (AIME -STINFO)~~

160 SKYNET ST STE 2315
LOS ANGELES AFB, CA 90245-4883



~~CONFIDENTIAL~~