

HEADQUARTERS 243,8636-3 WS 117 L ADVANCED RECONNAISSANCE SYSTEM RETURN TO HISTORIAN'S OFFICE AFBMD 2 April 1956


SPECIAL HANDLING REQUIRED NOT RELEASABLE TO FOREIGN NATIONALS

MAN COLUMN

NOFORN 1

SECRET

650260.0

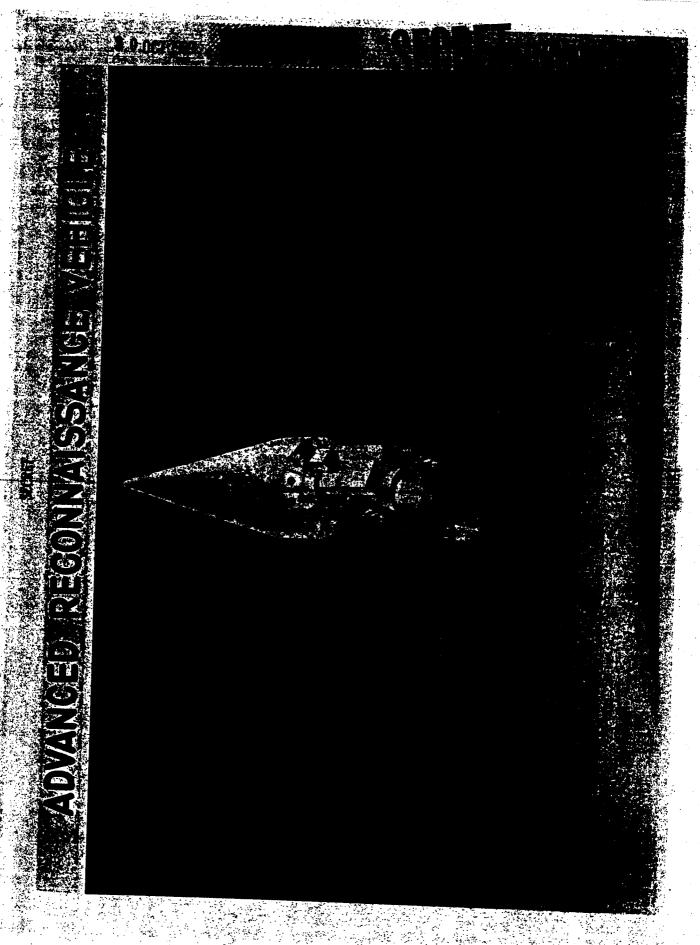

SECRET NOFOR!

WESTERN DEVELOPMENT DIVISION HEADQUARTERS AIR RESEARCH AND DEVELOPMENT COMMAND

2 April 1956

FOREWORD

- 1. Atomic and hydrogen weapons of enormous destructive power, carried by jet bombers and supersonic missiles, have vastly increased the importance of surprise in modern warfare. Indeed, it is difficult to visualize how an aggressor could achieve true victory except by an overwhelming, unexpected attack. With surprise, the chances for success are, however, excellent. Unfortunately, the capability for surprise attack rests almost exclusively with secretive, aggressive nations. (COMFIDENTIAL)
- 2. These facts give extreme importance to any intelligence-gathering system which promises to significantly reduce the ability of possible enemies to launch a surprise attack against the United States.— ES 117L is such a system. It makes use of an artificial satellite, circling the earth continuously high above the sensible atmosphere, as a platform from which to gather intelligence regarding activities of potential enemies. (SECRET)
- 3. Air Force study of satellite wehicles dates from 1946, when a study by the Rand group indicated the technical fessibility of such vehicles. These studies have been extended to cover the question of military utility. The Rand naissance. Extensive further investigation has shown beyond reasonable doubt (2) these components could be developed to function as required, and (2) these components could be integrated into a workable and practical system.
- 4. An appropriate development approach has been determined, and the cost of development estimated in considerable detail. Contributions from other protible with 107A program promises to effectively solve the greatest single problem, namely, securing the required orbiting velocity of some 25,000 feet per second. These reductions now leave little doubt that the military worth of a satellite reconnaissance system will amply justify its cost. (SECRET)
- 5. The studies of the past ten years and related developments from other programs have been integrated into the development plan presented on the following pages. (UNCLASSIFIED)
- 6. It is strongly recommended that this plan be accepted and development authorized immediately at high priority. (CONFIDENTIAL)

B. A. SCHRIEVER Major General, USAF

Commander

ND-56-00832

iii

NOFORN

CONFIDENTIAL

WS 117L DEVELOPMENT PLAN

2 April 1956

TABLE OF CONTENTS

	Pages
Title Page	
Foreword	
Table of Contents	1
Introduction	iii iv
DD Form 613	
Tabs	V, Vi, Vii B-1 thru B-12
Tab 1 - General no.	and Park
Tab 1 - General Design Specifications Tab 2 - Schedules	C-1 thru C-16
Tab 3 - Test	D-1, D-2
Tab 4 - Facilities	B-1 thru E-4
Tab 5 - Program Garage	F-1 thru F-18
Tab 5 - Program Cost Estimates	G-1
Figures	9-1
Fig. 1 - Advenced no.	•
Fig. 1 - Advanced Reconnaissance Vehicle	
	_11
	B-5
Fig. 4 - Payload on Orbit with Degraded	B-6
Fig. 5 - Pioneer Satellite Vehicle	C-4a
O' V " WO 11/1. CTAINS OL	C-8a
Fig. 7 - WS 117L Intelligence Center	C-10a
	C-14a

WS 117L DEVELOPMENT PLAN

2 April 1956

INTRODUCTION

The Air Force is culminating some ten years of study to determine the military utility of a man-made satellite. In 1946 the newly created RAND group was asked by the Air Force to determine the feasibility of placing a man-made satellite on orbit. On the basis of the propulsion technology at that time, RAND's reply to this request was that such an operation would be feasible. There was, however, no determination made of the military usefulness of such a satellite. RAND continued the studies and completed their "Teedback" report, as it became known, in the spring of 1954. They concluded that the conduct of visual and/or electronic reconnaissance is the most promising military use for an early un-manned satellite vehicle, and their final report included a suggested minimum pioneer visual reconnaissance system. (SECRET)

Based upon the conclusions reached in the "Feedback" program, the Air Force has been carrying on an extensive study program aimed at determining the magnitude and direction to be taken on a Development Program for a Reconnaissance System utilizing a satellite as a platform for collecting intelligence information. This extensive study by the Air Force was divided into two primary objectives: first, to establish that critical components of this satellite reconnaissance system would in fact be attainable to perform the functions for which they were intended; second, to ascertain if these components could be successfully integrated into a working reconnaissance system. (SECRET)

To accomplish the first of the two objectives, a program of separate tasks aimed at determining and advancing the state of the art as required was initiated. RAND, having recognised that critical areas exist, had initiated studies to investigate these areas and to solve the associated problems. The Air Force continued RAND's work and extended it to investigate other critical areas as they were determined to exist. As an example, one of the critical items is that of providing sufficient auxiliary power. Studies were initiated and are still under way to determine the feasibility and best method of providing sufficient power aboard the satellite to operate the reconnaissance equipment. Nuclear reactors to be used as a heat source in the generation of electrical power are being studied, as well as the possibility of utilizing the sun as a source of auxiliary power. (SECRET)

Studies have been under way to determine the best method of providing basic inertial guidance and attitude control for the vehicle. The problems associated with the reconnaissance packages themselves have been given maximum attention over the past several years. These include both the problem of the visual reconnaissance using television and film and radiation or ferret reconnaissance techniques. The associated problems of radiation damage from the nuclear reactor and the problem of component reliability under long unattended operation in the satellite's environment also have been studied. Not overlooked have been the problems of acquisition and tracking of an orbital vehicle and the command equipment necessary for use with such a vehicle. (SEGRET)

WS 117L DEVELOPMENT PLAN

Introduction (cont'd)

2 April 1956

The manifold problem relating to the capability of an intelligence agency to utilize the vast amount of intelligence information which is potentially available from this type of system has also been considered. When one considers that a single satellite vehicle of the type described in the "Feedback" report may be capable of producing up to a hundred thousand pictures daily and when one further considers that utilizing such vehicles for surveillance could possibly require numbers of vehicles to be operating simultaneously, one can quickly see that this information would swamp all heretofore known or considered means for processing intelligence information. It has been recognized that the development of such a system would encompass practically every field of science known to the Air Force, industry, and the scientific community in general. The best competence available in these various fields has been fully utilized during these studies. Participating in these studies have been the laboratories and research agencies of the Wright Air Development Center, Rome Air Development Center, and Air Force Cambridge Research Center, and through these agencies the individual study tasks have been functioning either in industry, under contract to the Air Force, or as individual and discrete technical studies "in the house" of the laboratories.

The second major objective (the problem of integrating the various components both space-borne and ground-based into a workable reconnaissance system) has been attacked. (SECREY)

In the spring of 1955, design study proposals were solicited from selected centracters from industry. The number of sources solicited was limited by the consideration of maintaining a secure program throughout the design and development phase. This is a recommaissance system involving the launching of a vehicle into orbit for the ultimate purpose of collection and dissemination of intelligence information. Therefore, the problem of providing an airframe and engines did not need to be the sole guide to the type of contractors to be solicited. These solicitied were the Lockheed Aircraft Corporation, the Radio Corporation of America, the Glenn L. Martin Company and Bell Telephone Laboratories. It will be recognized that there were ostensibly two airframe manufacturers and two submit a proposal. (SECRET)

Since the middle of June of last year, the other three contractors have been preceding with Design Studies. These contractors have studied the entire system. The objective of their studies has been to determine whether a military intelligence system aimed at satisfying the national intelligence requirements of the future can be foreseen at this time with sufficient definitude to indicate full scale development, and to establish the direction and magnitude of the technical programs needed to realize this development. The system was designated to have co-missions: first, it was to provide physiographic pioneer and surveillance coverage of the

WS 117L DEVELOPMENT PLAN

Introduction (cont'd)

2 April 1956

USSR and its companions; and, second, it was to be capable of providing and maintaining continuous and comprehensive surveillance of the electronic activities of the Soviet Russia. Involved would be a test program utilizing a satellite vehicle. (SECRET)

These design studies have culminated in three separate and distinct development plans prepared by the three design study contractors. From these design studies, and from the vast amount of information that has been obtained from the state of the art studies, has evolved the Weapon System 117L Development Plan. (SECRET)

Page vii

SECRET

WS-56-00832

2. SECURITY 4. INDEX NUMBER 10.JECT SUBGROUP	S. PROJECT WS 11	7L
"	2 Apr	,
		11 1956
ULUCT SUBBBOARD		1 70 770
		7A. TECH. OBJ
	_	
AMB/OR LABORATORY	CON	TRACT/W.O. NO.
•		
		•
CTS	1 19 5	T. COMPL. DATES
		T. COMPL. DATES
	DEV.	
	TEST	
	OP. IN	
•	18. F	PRISCAL BITS. (M
	- 	
14.		
<u>. </u>	<u> </u>	
		
·		
		17. 85 RES. DRV. TRET OP. 87

equired, in order of priority are:

- Strategic Warning;
 Enemy Military Forces in Being;
 Enemy Hilitary Stockpiles of Thermonuclear-Atomic Weapons;
- 4. Enemy Logistics Capabilities;
 5. Enemy Industrial War Capabilities.

C. PAGE B-1 PAGES

DD : JAN 82 613

22. RDS

DD Form 613 (cont'd)

2 April 1956

Improved knowledge of potential enemy capabilities and intentions in the above areas will greatly improve our abilities to conduct peacetime negotiations, to plan our defenses, and to use our weapons if the necessity arises. (SECRET)

Information on the existence, deployment, and location of all targets will allow for the preparation of more complete strike data and thereby improve the capability of strategic bombardment. (SECRET)

Ferret data will make possible the advanced development of suitable countermeasures. (SECRET)

Knowledge of the disposition and nature of defenses will enhance penetration probabilities. (SECRET)

Technological data acquired can be used in the proper erientation of W. S. Wespen Systems (both defense and effense) and possibly for their improvement. (SECRET)

Evidence of enemy intention to wage war will provide much needed lead time for mobilization of forces, dispersal of weapons and population and an increased capability for detection of attack. (SECRET)

Specific warning of overt acts, such as attacks under way, will allow for activation of defenses and counterblows (i.e. WS 107A), and will materially improve chances for survival after an initial attack.

(SECRET)

As a secondary requirement, the USAF has required the prevision of a satellite vehicle of greater payload potential than the Vanguard for scientific purposes. (SECRET)

DD Form 613 (cont'd)

2 April 1956

21a. Military Characteristics

Operational vehicles will be launched from an appropriate location in United States territory. An ICBM will supply the primary propulsion. (See Figure 2). The ICBM booster will fall away on burnout, and an internal power-plant in the orbiting nose section will supply the remaining propulsion required (4-8000 ft./sec.). The vehicle will ascend to an altitude of about 300 miles, where a substantially circular orbit will be established. Internal controls will then erect the vehicle to the proper attitude. The most common orbits will pass within a few degrees of the poles. When the vehicle approaches an area of interest, an internal timer will start the sensing equipment. (See Figure 3). The signals will be received and stored on photographic film, magnetic or electrostatic tape, or some other appropriate medium. (SECRET)

The vehicle will continue around the earth, and when within range of a ground receiving station, will begin to transmit the recorded data. The data will be received, processed and transmitted to the using agencies.

(SECRET)

The vehicle will then begin its next cycle. These revolutions will be repeated at approximately 90 minute intervals. Because the orbit is essentially fixed in space, while the earth rotates inside it, successive passes over the earth's surface will be displaced by approximately 22-1/2 degrees. This offsetting will permit a single vehicle to view the entire earth in a total time period which depends on the width of swath observed. Useful operation will be terminated either when air drag slows the vehicle to where it plunges into dense atmosphere, when the electrical power supply is exhausted, or when failure of equipment takes place. Expected useful life for later systems will be in excess of a year. (SECRET)

The orbiting satellite vehicles of WS 117L will be equipped with devices for sensing and relaying to the ground reconnaissance information in the radio, infrared, and visible regions of the radiant energy spectrum. The data will be received at a rate that will permit coverage of the entire Soviet bloc by a single vehicle as frequently as once every eight days. (SECREF)

It is expected that the equipment will permit the following:

Pioneer terrain and mapping coverage;
Collection of world-wide cloud cover and other weather data;
Detection of new and hitherte unknown targets and verification of
known targets;
Determination of electronic signal characteristics;
Location of targets and defenses;
Collection of data on technological improvements;
Evaluation of military and industrial strength;
Monitoring of electronic emissions;
Surveillance of enemy build-up indications;
Warning of attacks under way or pending:

Assessment of high-yield weapons' damage; Reconnoitering of military movements. (SECRET)

SPECIAL T

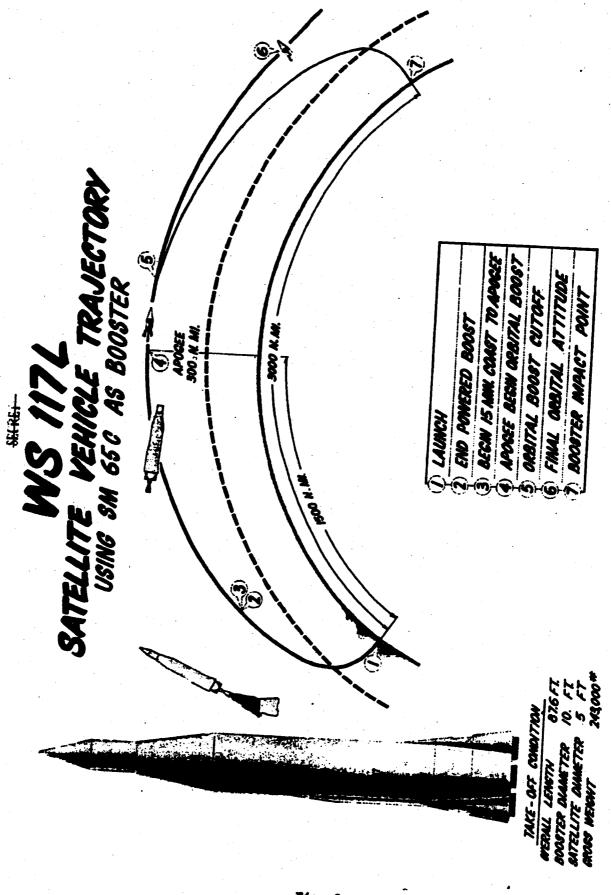


Fig. 2 Page B-5

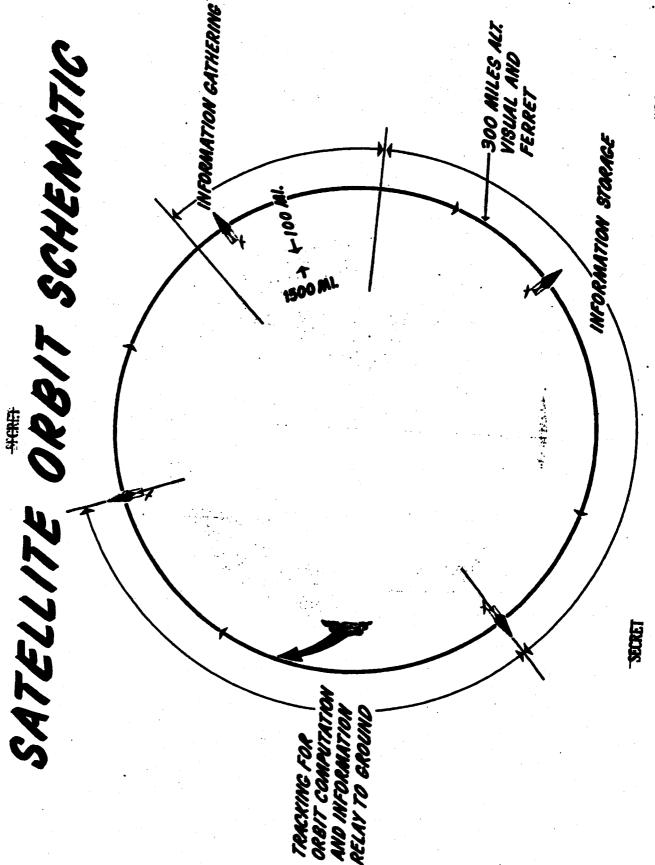


Fig. 3 Page B-6

WS 117L DEVELOPMENT PLAN

DD Form 613 (cont'd)

2 April 1956

The programs have been chosen and phased to meet two major development objectives:

- 1. Optimize the development of the operational Advanced Reconnaissance Systems in terms of the best balance between early availability, effectiveness in performing the intelligence mission, and over-all economy in terms of man-power and funds. (SECRET)
- 2. Provide a stepwise series of reconnaissance systems capable of collecting significant visual and ferret intelligence of high priority at the earliest dates. (SECRET)

<u>Program I:</u> Early flights will have as their primary objectives: establishing feasibility of orbital operation and collecting basic environmental data relating to the satellite operation. Also, there will be imposed the additional objective of ARS component testing and collection of geophysical data of interest to the scientific community in general. (SECRET)

<u>Program II</u>: This program is designed to yield a Pioneer Visual Reconnaissance with a capability of mapping physiographic features at a ground resolution of 100 feet and a locational accuracy of one-half mile. Physical recovery of exposed film may be attempted if this procedure shows promise of providing early information. (SECREF)

<u>Program III:</u> This program will be a Piencer Ferret System capable of providing frequency density information over Russia and Red China in the range from 50 mc/s to greater than 18,000 mc/s. Emission sources operating above 1000 mc/s will be located to within 60 miles. (SECRET)

<u>Program IV</u>: This program covers the development of a large scale photographic function with a ground resolution of about 20 feet. (SECRET)

<u>Program V</u>: This program leads to the advanced Ferret System that allows for a more accurate determination of signal characteristics in CW as well as pulsed signals. Less than fifty mile uncertainty is anticipated in the location of an isolated signal. (SECRET)

Program VI: Program VI leads to development of a continuous visual surveillance system at ground resolutions of 20 feet or better, using high resolution television with video recording or with direct transmission; film cameras with protection from nuclear radiation using shielding or bolatype vehicles, to separate the APV and film, as used with solar APV's; and phototape or some other system with a temporary, reusable image storage medium. (SEGRET)

<u>Program VII</u>: Program VII is designed to yield an infrared early warning system to afford continuous detection of aircraft and ICBM's. (SECRET)

Page B-7

WS 117L DEVELOPMENT PLAN

DD Form 613 (cont'd)

2 April 1956

<u>Program VIII</u>: Program VIII consists of the development of a surveillance type ferret as well as other specialized electronic reconnaissance systems. (SECRET)

Technical Aspects

In view of the urgency of the program, it is considered mandatory that there be concurrent research and development of both the satellite-borne and ground-based subsystems to insure maximum military utility and system reliability. To realize these ends, alternate technical tasks and state of the art investigations will have to be made simultaneously until a specific method is proven. (SECRET)

It is apparent that in order to satisfy the requirement for an early flight demonstration, it will be necessary to make use of existing compenents of predictable reliability. The development of the ARS is tailored to make maximum use of equipments, in existence or under development for other systems, which are applicable. (SECRET)

The contractors' design studies and cognizant agencies within ARDC have determined the feasibility of utilizing other equipment within the military inventory. Some examples are:

- 1. Use of a WS 107A vehicle (See Figure 2) will fulfill the major portion of the ARS propulsion requirement. An SM-65C (later SM-68) will be used as the ARS beester on a minimum interference basis.
- 2. The all-inertial guidance subsystem of WS 315A and a tactical bombing inertial system scheduled to be available in time to be utilized in the WS 117L flight test program. Components from these systems can be utilized with a minimum of modification in the design and construction of a complete all-inertial ascent guidance system for WS 117L.
- 3. Valuable environmental data will be secured through Air Force Cambridge Research Center and other agencies. Requirements for geophysical-environmental data will be placed against the Vanguard program.
- 4. Acquisition and tracking radar equipment (i.e. AM/FPS-16), under development within other systems, can be used for the ARS applications in the appropriate time period with minor modifications.
- 5. For the early orbital testing of the ARS vehicle, the engineering of Comvair SM-65C Launch Facilities can be adapted, with minor medifications, to fulfill ARS requirements. This will gain time toward satisfying the ARS mission, and provide additional flexibility in both programs in that engineering-wise the launch requirements are similar. (SECRET)

Page B-8

WS 117L DEVELOPMENT PLAN

DD Form 613 (cont'd)

2 April 1956

21c. - SUBSYSTEMS

- 1. Spaceframe: The vehicle subsystem will consist of the spaceframe structure of the satellite final stage together with the mating details of satellite and beoster stages and including tankage design. The approach will be to design the vehicle structure to be compatible with the other subsystems and to serve as a complete structural framework for them. (SEGERY)
- 2. <u>Propulsion</u>: For the pieneer systems, the Project Vanguard engine will be used and for the Advanced System a development program will be prosecuted as outlined in the General Design Specification. (UNCLASSIFIED)
- 3. Auxiliary Power: It is proposed to use silver-sinc primary batteries for pioneer vehicles and test systems. The development of a Muclear APV and also solar batteries will be initiated for the advanced systems. As a back-up and also as a possible replacement for batteries, a chemical open-cycle APV may be developed. (UNCLASSIFIED)
- 4. <u>Guidance and Control</u>: In carrying out the development of this system, maximum possible use will be made of existing capabilities evolved by previously sponsored Government research and development in the inertial field. Because of differing requirements, no guidance system currently under development will be satisfactory for guidance of the WS 117L vehicle. A single all-inertial system in the orbiting section appears to be the most promising approach.
- 5. <u>Visual Reconneissance</u>: The visual reconneissance system will be capable of:
- (1). Detecting and locating physiographic features of terrain, population centers, sirfields, harbers and transportation nets (the Pieneer Systems will be designed to detect objects of 100 foot dimensions and the Advanced Systems approximately 20 feet);
- (2). Performing weather reconnaissance with a sector width of not less than 800 miles. (SECRET)
- 6. <u>Electronic Reconneissance</u>: Three electronic reconneissance systems will be developed, providing progressively greater frequency coverage as more powerful vehicle power supply systems become available. The final goal is a coverage of 40-40000 mcs. with accurate measurements of the usual signal parameters of interest to analysts. (GGM**IDEMTIAL)
- 7. <u>Infrared Surveillance</u>: An infrared surveillance system for the satellite promises to provide early warning against attack by manned aircraft and ballistic missiles. It is proposed to conduct an intensive feasibility study in regard to the use of infrared in a satellite; the prosecution of

Page B-9

WS 117L DEVELOPMENT PLAN

DD Form 613 (cont'd)

2 April 1956

21c - SUBSYSTEMS (cont'd)

7. Infrared Surveillance (cont'd)

any associated development program will be contingent on the outcome of the study. For planning purposes, however, this development plan includes all cost and related data covering the development and testing of an infrared surveillance version of the satellite. (EECRET)

8. Ground-Space Communications:

This subsystem consists of all vehicular and ground electronic equipment required for acquisition, tracking, command, programming, ground-space data links, timing, telemetering and erbit computations. (CONFIDENTIAL)

The vehicular equipment includes the beacon-transponder, including "lost bird" beacon facilities, the command receiver and associated time sequencing programmer the recommissance data transmitter, an accurate vehicle time standard, a telemetering encoder and transmitter, and destruct circuits. (COMPIDENTIAL)

The ground sites will be appropriately located to provide adequate coverage and data readout time for both the test and operational phases of the program. The following equipment will be included at each site:

(CMCLASSIFIED)

- 1. Tracking radar with acquisition features, command transmitter, data receiving and recording equipment, data communication links to the WS 117L Intelligence Center telemetering receiving facilities, and a supplementary orbital computer. (SECRET)
- 2. A master computer will be located at the WS 117L Intelligence Center. (UNCLASSIFIED)

9. Data Processing and Intelligence Bissemination:

The data precessing and intelligence dissemination subsystem, located in the WS 117L Intelligence Center, will be capable of the functions necessary to insure intelligence and weather information in a form that provides a clear, adequate basis for human analysis and command decision. The end item will be a highly automatic, integrated subsystem which provides equipment for the processing of visual, ferret and infrared data into intelligence information for use by intelligence and command activities. (SEGRET)

The functional areas necessary to insure construction and availability of information consist of conversion, extraction, indexing, storage, display and dissemination. These will provide intelligence information in the form, frequency and quantity desired by various users. They will become tasks under the Ground Data Handling project and be discussed more in detail under the General Design Specifications, Tab 1. (GONFIDENTIAL)

Page B-10

WS 117L DEVELOPMENT PLAN

DD Form 613 (cont'd)

2 April 1956

21c. - SUBSYSTEMS (cont'd)

9. Data Processing and Intelligence Dissemination (cont'd)

Operational development of this subsystem will be oriented towards compatibility with, and maximum utilization of, equipment under development for System 438L - USAF Intelligence Data Handling System, (UNCLASSIFIED)

10. Ground Support and Training:

This subsystem involves the manpower, equipment, and appropriate facilities (not peculiar to specific operation or check-out of other subsystems) to test and launch the ARS Orbiting Stage-ICEM-booster combination; also, all training required to provide capable personnel for all phases of the ARS operations. (SECRET)

Facilities and equipment will be required at the ICBM Captive Test and Launch Areas during early WS 117L flight testing. To eliminate mutual interferences between the ICBM and ARS programs, a separate ARS launch complex appears desirable. (SECRET)

11. Plight Test

Requirement:

The flight test program will provide vehicles, equipment and instrumentation for development of flight testing of the Advanced Reconnaissance System.

In general, test vehicles used will be those developed for other purposes, or will be logical steps leading to the provision of suitable vehicles for the reconnaissance systems. The subsystem will:

- 1. Obtain geophysical environmental information;
- Serve as a test bed for ARS subsystem components;
 Measure performance characteristics of reconnaissance

equipment:

4. Test techniques for preparation, launching, tracking and data transmission from a satellite. (SECRET)

Vehicles:

Four basic vehicle types will be used, each of which has as its purpose the provision of a vehicle for the evaluation of specific problem areas.

Vehicle components and functions will be tested and geophysical environmental data obtained from a non-orbiting vehicle of limited range and flight duration, such as the Aerobee.

Page B-11

WS 117L DEVELOPMENT PLAN

DD Form 613 (cont'd)

2 April 1956

21c - SUBSYSTEMS (cont'd)

11. Flight Test (cont'd)

Full scale airframe systems will be functionally tested in captive firings of the orbit stage test vehicle, and perhaps by non-orbiting flight testing of this airframe on Redstone or other available missiles.

Satellite systems will be evaluated and any additional geophysical environmental information required will be obtained from long range ballistic flight tests in non-orbiting test wheicles, such as SM-65A missiles.

Operational techniques and problems of satellite flight will be evaluated with orbiting test vehicles. These orbiting vehicles will be as mearly suitable for recommandations as available design information will permit, in order to minimise "dead end development." Orbiting test vehicles will also be used to obtain orbiting geophysical, environmental, and scientific data which can only be obtained from an orbiting body. (SECRET)

(Note: Consideration will be given to provision of orbiting test vehicles for the purpose of collecting geophysical data for advancement of the state of the art.) (SECRET

12. Instrumentation:

It is expected that instrumentation on early flights will require the full capacity of the telemeter system to obtain data on environmental conditions (both geophysical and induced) peculiar to the Advanced Reconnaissance System. Later flights will require the instrumentation of the various payload systems to determine their operation in the Advanced Reconnaissance System vehicle environment established by the early flights of each type of flight test vehicle. Information channels not utilized for the prime objective of this stage will be used for obtaining additional geophysical and induced environmental data. (SECRET)

Page B-12

WS 117L DEVELOPMENT PLAN

GENERAL DESIGN SPECIFICATIONS

PART I - GENERAL

A. Statement of Problem

WS 117L fulfills System Requirement No. 5, dated 17 October 1955, by providing an advanced reconnaissance system capable of accomplishing the follow-

- 1. Provide pioneer and surveillance physiographic coverage of the USSR and its allies.
- 2. Provide continuous and comprehensive ferret coverage of the USSR and its allies. (SECRET)

This system will use an earth-circling satellite as a platform for the data collection equipment, and will be operational in the 1960-65 time period. Since there are areas of the USSR and its allies where inadequate intelligence exists, a limited reconnaissance capability must be realized at the earliest possible date. In conjunction with this requirement, there is a secondary, but nevertheless important, need for a satellite capable of securing scientific order of hundreds of pounds.

B. Approach

- 1. The Advanced Reconnaissance System, WS 117L, consists of all equipment and facilities required to:
- a. Launch, propel and orient a satellite vehicle and its payload of data collecting and transmitting equipment on orbit.
- b. Acquire and track the vehicle at all times when it is in range of a ground station, in order that a contact can be established and maintained and the vehicle's future tracks can be anticipated.
- c. Receive the collected data at a ground station and transmit required commands to the wheicle.
- d. Process, interpret and reduce the collected data and disseminate the resulting useful intelligence. (SECRET)
- 2. The development plan for WS 117L is predicated on the following factors:
- a. Development of the system should proceed from a simple design of limited capability to a highly refined version capable of meeting fully the requirements of System Requirement No. 5. An important trade-off

GDS (cont'd)

WS 117L DEVELOPMENT PLAN

2 April 1956

of sophistication for availability is necessitated, if useful, and presently non-existent intelligence data are to be gathered at an early date. (SECRET)

- b. A vigorous, well-funded development program is required, if the formidable problems met in the development of such a unique system are to be overcome. (SECRET)
- 3. One test and three operational systems are planned. These systems have different capabilities and will be time-phased to provide an intelligence competence as indicated in 2a above. The four systems are further sub-divided into eight programs and the organization is as follows:

a. Engineering Prototype Test System:

Program I: Early flights will be made to establish the system components and subsystems on an individual basis. (SECRET)

b. Pioneer System:

<u>Program II</u>: This program is designed to yield pioneer visual reconnaissance with a capability of mapping physiographic features with a ground resolution of 100 feet and a locational accuracy of one-half mile. (SECRET)

Program III: This will be a pioneer ferret system capable than 18,000 mc/s. Emitting sources operating above 1000 mc/s will be located within 60 miles of their geographic position. (SECRET)

c. Advanced System:

Which possesses a ground resolution of 20 feet and uses photographic techniques, will be developed. (SECRET)

Program V: An advanced ferret system, which permits accurate determination of both CW and pulsed signal characteristics, will be developed. (SECREY)

d. <u>Ultimate System:</u>

Program VI: A visual reconnaissance system capable of continuous surveillance, and which will have a ground resolution of 20 feet and uses television techniques in conjunction with a reusable storage medium, will be developed. (SECRET)

2 April 1956

Program VII: A system capable of using infrared detection to provide early warning and continuous detection of aircraft and ICBM's will be developed. (SEGRET)

Program VIII: This program will be for the development of a surveillance ferret reconnaissance system as well as other specialized electronic reconnaissance systems. (SECRET)

During the course of development, both the satellite-borne equipment and the ground-based equipment will be time-phased so that they will be operationally compatible. (SECRET)

Many of the ground handling and launching equipments will be duplicates of those used by WS 107A and attention will be given to integration of WS 117L's requirements with WS 107A schedules in order to minimise interference. (COMPIDENTIAL)

PART II - DESCRIPTION

A. Vehicle

The vehicle subsystem will consist of the space frame, propellant tankage and booster mating structure of the satellite. Vehicle design must meet the following requirements:

- 1. Provide for the effects of environmental factors, such as drag and gust loading, meteorite bombardment, and thermal and nuclear radiation.
- 2. Accommodate the different payloads as new items of equipment are developed.
 - 3. Accommodate ICBM boosters for first-stage propulsion.
- 4. Provide for proper mating and separation of booster and vehicle stages.
 - 5. Accommodate several different auxiliary power units.
- 6. Optimize equipment packaging to minimize attitude control power requirements. (SECRET)

The engineering prototype system will use a vehicle design which most readily accommodates the visual and ferret payloads of the Pioneer Systems. This vehicle will have a cone-cylinder body which will be about 18 feet long, tween 7,000 and 3500 pounds. This permits the use of an unmodified SM-65C as a booster. This vehicle will have non-integral tankage for the third stage given in the design for degradation of booster performance, which is indicated graphically in Figure 4. (SECKET)

GDS (cont'd)

2 April 1956

Later vehicle design will have a similar configuration, employ integral tankage design, and be adaptable to either a modified SM-65 or SM-68. The weight of the third stage, which mounts on the booster in place of the warhead, will be in excess of 13,000 pounds. This will more than double the weight of the satellite which can be placed on orbit. (SECRET)

An early, half-scale non-orbiting version of the vehicle may be designed and used to flight test the configuration and full-scale subsystems on an individual basis. This same vehicle may also be used to gather environmental data. A Sergeant-type booster would be the basis for this vehicle design.

(CONFIDENTIAL)

B. Propulsion

The Project Vanguard 7500-pound thrust engine, having a 278 second specific impulse, is planned for the Engineering Prototype and Pioneer Systems. Forces for vehicle flight control will be obtained from two small gimballed engines. Certain additional testing of the Vanguard engine over and above that performed under the Vanguard Project is contemplated under this program in the interest of insuring reliability. As a backup for the Vanguard engine the XLR-81 Hustler engine will be considered, as well as RMI's XFSU turbo pump engine. (SECRET)

In regard to improved engines for the two latter systems, it is planned to:

- 1. Conduct a study to determine the necessity for and usefulness of improved performance such as that obtainable from an ammonia-fluorine type engine.
- 2. Initiate a development program for an ammonia-fluorine-type engine, providing the above study indicates that such development is required. A proposed engine of this type is estimated to be capable of producing 20,000 pounds thrust and 342 seconds specific impulse at altitude. Because of the four year development time required for an engine of this type, the early initiation of any required development is desirable.
 - 3. Study pump versus pressurized systems as applied to the ARS. (SECRET)

C. Auxiliary Power Subsystems


The auxiliary power subsystems will include all items of the auxiliary power unit required for furnishing all power to equipments in the vheicle. The power units require: power outputs of from 100 watts to 10 kw, depending on mission application; a minimum of interaction with drag and attitude factors affecting the vehicle on orbit; reliable continuous operation for the useful lifetime; and maximum simplicity of operation with minimum weight.

(SECRET)

Page C-4

WD-56-00832

SECRET

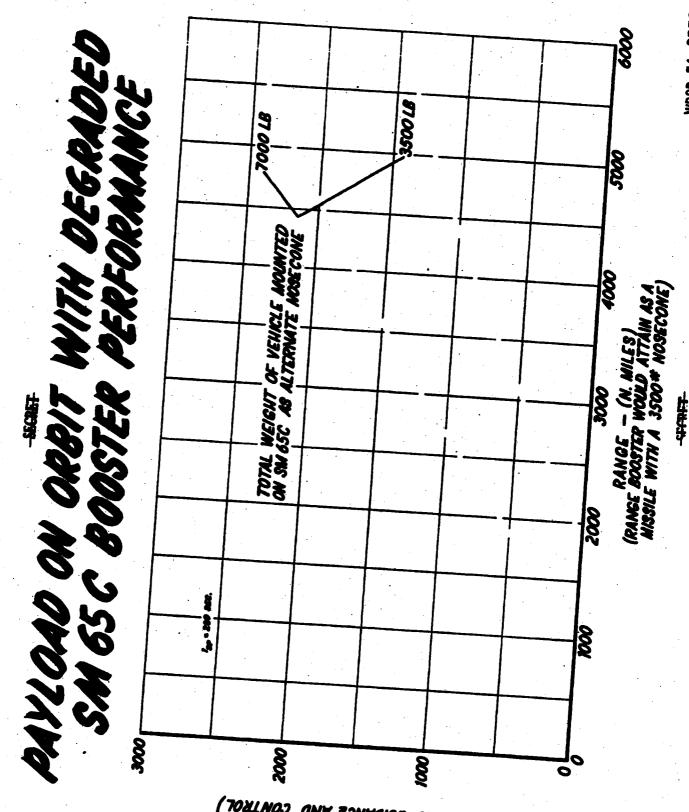

AND BURNACE AND CONTROL)
(INCLUDING AUXILIARY POWER UNIT
ALLOWABLE PRONEER PRYLOAD (POUNDS)

GDS (cont'd)

2 April 1956

Chemical battery units will provide power for test vehicles and early operational vehicles. Silver-sinc or other silver-alkaline types of primary batteries will be used where possible. Development of secondary batteries will be limited to the extent considered necessary for potential use with solar converters as a power source for operation on the dark side of the earth. (BMCLASSIFIED)

Solar converters will be developed to provide power for vehicle operation, particularly for applications where the loads are from 1/2 to 1 kw. Study of stacked converters will be intensified to determine ultimate power output available for given collector areas. Various types of solar converters will be studied for improving the efficiency of conversion. Studies will be made of environmental effects of meteors and natural radiation on the collector plates to determine degradation rates and useful lifetimes in orbit. (SECRET)

A nuclear power unit will be developed under cognizance of the AEC to provide power of the order of 3 - 10 kw for payloads requiring greater power such as the ferret application. Optimization studies will be made to determine the required shielding for vehicle components and the effects on overall vehicle configuration and electronics. (COMPINEMIAL)

Development of a chemical power unit for the gas-generator and turbine type may be conducted as a back-up program for the other types of auxiliary power units, depending on the results of further study. Studies of nuclear energy will be conducted to determine feasibility and desirability of conducting the development of these types of units. (GENTINENTIAL)

D. Guidance and Control Subsystems

The placement of a WS 117L vehicle on orbit requires guidence and attitude control subsystems:

The ascent to orbit is divided into three phases: (See Figure 2)

- 1. The powered portion from launch to booster cutoff and separa-
- The coast to apogee on an elliptical ascent trajectory.
 The application of the orbital boost to provide the necessary increment of velocity to place the vehicle on a desired orbit. (SECRET)

During the powered portion of the ascent, centrel is accomplished by using the existing boester subsystem consisting of main engines, sustainer and tiltable verniers. During the powered ascent the control signals are derived from an autopilet to cut off and control the direction of the rocket engines in order to place the vehicle on an elliptical trajectory whose apogee is at the desired orbital altitude. This phase of the problem is similar to the guidance of a ballistic missile, although the accuracy requirements for the WS 117L application are nearly an order of magnitude

WS 117L DEVELOPMENT PLAN

GDS (cont'd)

2 April 1956

less stringent than the existing 107A requirements. For this phase, either the all-inertial or radio inertial types of guidance are applicable. (SEGRET)

After staging, the booster (SM-65C or 68) continues uncontrolled to impact downrange, while the satellite vehicle continues coasting to orbital altitude. At this time, the orbital boost must be applied in the proper direction to place the vehicle in the desired orbit. This need for a precise direction requires an orientation reference in the vehicle, which is best met by a gyro monitored stable platform, the heart of an inertial system. This feature alone dictates the requirement for an inertial system during a portion of the ascent. The use of a radio-inertial system provides additional problems with a loss of reliability and flexibility in choice of orbit selection. Feasibility studies by Rand, North American Aviaion, Massachusetts Institute of Technology, and the three system design study contractors as well as cognizant Air Force agencies indicate that an allinertial system is the most feasible for the ascent guidance of WS 117L.

(SECRET)

The all-inertial guidance subsystem of WS 315A is scheduled to be available in time to be utilized in the WS 117L flight test program. Components from this system can be utilized with a minimum of modification in the design and construction of a complete all-inertial ascent guidance system for WS 117L. (SECRET)

An all-inertial tactical bombing system under development is also scheduled to be available in time to furnish critical components from which a complete ascent guidance system for WS 117L can be designed and built.

(SECRET)

Guidance: The vehicle guidance subsystem will establish the proper vehicle orientation during coast and the second propulsion stage with reference to a stable platform corrected by a transition computer. The guidance subsystem will provide information to initiate and cut off the orbital boost engine upon entry into orbit, whereupon the guidance subsystem will activate a programmed tipping of the orbiting vehicle to place it in its stable orientation. Attitude indication will be provided for increased accuracy of correlation for geographical loaction. (SECRET)

Flight Control: The Flight Control Subsystem will perform the following functions: (1) Control and stabilization of the booster during the first stage boost phase; (2) Control and stabilization of the satellite vehicle during the second stage powered phase; (3) Control and stabilization of the satellite during the coast phase; (4) Control and stabilization of the satellite during orbital entry; and (5) Control and stabilization of the satellite vehicle on orbit. The Flight Control Subsystem will utilize an ICBM developed ascent control system for booster control during powered will accept commands from the guidance subsystem during ascent and orient the vehicle during coast and the third propulsion stage with reference to a preselected vehicle orientation for placing the satellite vehicle on orbit. To control and stabilize the orientation of the satellite

Page C-6

GDS (cont'd)

2 April 1956

while on orbit, a system using rate gyros for measurement and gas jets or reaction wheels for control will be employed. (SECRET)

E. Visual Reconnaissance

Pioneer Visual System: To provide an early visual recommaissance system, it is proposed to utilize a photographic camera with electronic readout. The film will be developed while the vehicle is passing from unfriendly territory to within range of the ground station and the image will be readout and transmitted to the ground station. The life of the system will be determined by the film and developer carried, but since the early vehicles will have battery power, the use of such a short term system appears to be appropriate. Recent film advances indicate that no more than five pounds of film per month will be required. It is estimated that a system of this type, when designed to detect loo foot ground objects, could cover an area of 200,000,000 square miles in approximately four months of operational life. (See Figure 5) (SEGRET)

Advanced Visual System: The advanced visual system will explore in detail, ground objects and accomplish surveillance of preselected target areas. Repetitive passes over the same territory will permit mapping with an accuracy of 1/10 of a mile. (SECRET)

A development program will be prosecuted for this system which has a capability of detecting 20 feet objects and has significantly longer life than the pioneer system. (COMPIDENTIAL)

The approach will be along the following lines:

- 1. Electrostatic Tape Method: In this process, the image forms a pattern of electrostatic charges on a tape of insulating meterial. When the ground station is in range of the vehicle, the tape surface is scanned by an electron beam and the video signal transmitted. The tape is then wiped clear of all charges and re-used. (COMPIDENTIAL)
- 2. Television-Magnetic Tape Method: In this process, the ground is examined by an image orthicon television tube and the resulting video signals stored on a magnetic tape for playback to the ground station. As in the electrostatic process, the tape is then wiped clear of signals and is re-used. (COMPIDENTIAL)

<u>Ultimate Visual System</u>: The ultimate visual reconnaissance system will keep potential enemies under a daily scrutiny of an activity available to satellite observation. Automatic ground data processing will permit the collection of greater quantities of visual information. (SECRET)

Additional development of the advanced visual system will be undertaken to improve resolution, storage devices, and such other equipments which will permit the better accomplishment of the ultimate visual mission. (GGRF)

GDS (cont'd)

WS 117L DEVELOPMENT PLAN

2 April 1956

F. Electronic Reconnaissance (Berret)

Pioneer Ferret System: Due to the limited power which will be available (i.e. 75 - 150 watts), the earliest system will only be capable of providing frequency density information in the range of 50 - 18000 mc/s. Emitting sources operating above 1000 mc/s will be located to within 60 miles. Some information on pulse width and pulse repetition frequency will be obtained. (SECRET)

This system will incorporate either a scanning superheterodyne or a crystal video receiver with a preamplifier using antennas directed at the horizon. Sweeping receivers with downward directing antennas will be employed. (See Figure 5) Harrow band magnetic tape recorders will be used for information storage. (SECRET)

Advanced Ferret System: When larger quantities of power become available (i.e. 250 - 500 watts) a system covering the frequency range from 40 - 40,000 mc/s will be used to more accurately determine signal parameters and emission source location. (About 50 miles) (SECRET)

Ultimate Ferret Systems: When a power supply of 1 - 10 kw becomes available, a more sophisticated system will be developed permitting very accurate determination of frequency, pulse width and pulse repetition frequency, and source location to within less than 30 miles. Wide band recording will enable continuous surveillance and complete identification of emitting sources by mission. (SEGRET)

G. Infrared Surveillance

Infrared systems appear to have promise of providing early warning against aircraft and missiles. In order to have a firm basis for proceeding with the development program, it is planned to conduct an early feasibility study. Information currently available indicates that detection of exhaust plumes of large aircraft and air breathing missiles at ranges of about 400 miles is expected. An early system might consist of a linear array of about 40 cooled lead-telluride cells located at the focal point of a five foot diameter relector provided with appropriate scanning. Storage of information would be by magnetic tape for later readout. (SEGRET)

More refined systems involving networks of satellites can be envisioned for the detection and tracking of ICBM's; However, the nature of any effort along this line under this program should await results of the AICBM Program.

(SECRET)

Fig. 5 Page C-8a

GDS (cont'd)

2 April 1956

H. Ground-Space Communications

The Ground-Space Communications Subsystem includes provision for:

- 1. Acquisition and tracking of the orbiting vehicle;
- 2. Command of the vehicle from a ground station;
- 3. Transmission and reception of data from the vehicle to the ground station; and
 - 4. The necessary intra-station communications. (SECRET)

The ground tracking or intercept stations will be located as shown in Figure 6 in time to be utilized by the first orbital test vehicles and throughout the remaining test program. The test stations located at Patrick Air Force Base, St. Lucia, Ascension, and Hawaii will provide the required acquisition and tracking information of the orbiting vehicle, data necessary for design of the orbit computer and read-out time for acquired reconnaissance data. The South-Central United States Station will serve as both an R & D prototype and an operational station. It will be used in conjunction with earliest R & D firings from AFMTC, and with both low and high inclination firings from the operational launch site (See T.S. Supplement). The final operational sites will be located as shown in Figure 6. Coordination will be accomplished so that, if at all possible, the South Central (U.S.) station will be located at the same site as the WS 117L Intelligence Center. (SECHET)

Each operational station within the United States will contain a tracking rader (including an acquisition system), an orbit computer, a command transmitter, a reconnaissance data receiving and recording system, a telemeter receiving station, programming and timing equipment, and connections to the ground communications net. The test stations will include most, but not all, of the above equipment, (CONFIDENTIAL)

Initially the tracking radar will be a modified SCR-584 if the AN-FPS-16 is not available, but the AN-FPS-16 will be used when available. A separate method of acquisition will be provided to insure acquisition of the vehicles. A microwave transponder-beacon will be employed in the vehicle to aid in acquisition and tracking and will utilize a frequency corresponding to the tracking radar in use. The radar-transponder link will be investigated as a possible command and telemetering link and will be used to back up the primary command and telemetering systems. The radar-transponder link will also provide a destruct command for the vehicle. (CONFIDENTIAL)

The command link will transmit operational program commands and time signals to the vehicle. Should a directional antenna be utilized by the satellite vehicle as part of the ground-space communications link, signals for antenna orientation on subsequent passes will be transmitted over the command link. Wherever possible and when necessary, commands sent over the

Page C-9

GDS (cont'd)

2 April 1956

command link will be fed into the radar-transponder link for execution. The command link will be capable of turning on the transponder-beacon for lost-bird operation. (CONFIDENTIAL)

A ruggedized mechanical escapement type programmer will be utilized for the earlier vehicles. An improved programmer, using punched tape or some other storage technique, will be used for the more complex vehicles and, where possible, the programmer will be coupled to the vehicle's timing system. A matrix (magnetic core storage) system shows promise for the more complex operational vehicles and will be investigated. (CONF)

The timing for the early orbiting vehicles will be provided by the programmer. However, as reconnaissance data becomes available, the timing system must be of such an accuracy that there will be no degradation of the data. If investigation indicates that undue complexity will not result, a timer suitable for the final operational system will be designed and used throughout the test and operational type flights. The vehicle timing system will be synchronized with the master ground timing system when the vehicle contacts the intercept station. All the intercept stations, the WS 117L Intelligence Center, and the vehicle will be time-synchronized so that orbital and acquired data can be correlated. (COMPIDENTIAL)

The orbital computers at the intercept stations will use orbital data (radar tracking and past history) to provide future orbital data and a time-synchronized recording of the vehicle's position during its orbit. Tracking information will be forwarded from the intercept station to WS 117L Intelligence Center and correlated with similar data from the other intercept stations. This accurate time-synchronized recording of positional information will be available for future orbital and programming computations and for read-out with the time-synchronized reconnaissance data recordings. The computers at the intercept stations will not require the sophistication of the computer at the Intelligence Center, but each will be capable of growth from the initial use for early flight tests to a final operational system. (SECRET)

The space-to-ground transmission of reconnaissance data will be accomplished to furnish the maximum data commensurate with bendwidth availability. For the visual systems, simultaneous investigations will be made relative to simplicity, early availability and utility of a satellite fixed data transmitting antenna scheme as well as the more complex steerable antenna arrangement. The transmitter tube will be chosen to meet ARS reliability. The data link receiving antenna will be a large parabolic antenna slaved to the tracking radar antenna. (CONTIDENTIAL)

The ferret data link system will either be identical to the visual data transmission scheme or utilize standard telemetering techniques. (UNCLASS)

Suitable time-synchronized recording of the reconnaissance data will be performed at each intercept station, and then transmitted to the Intelligence Center. (COMPIDENTIAL)

WS 1172 GROUND STATIONS



Fig. 6 Page C-10a

GDS (cont'd)

WS 117L DEVELOPMENT PLAN

2 April 1956

Ground communication facilities will be established in order to permit the rapid transmission of time-synchronized reconnaissance and orbital data from each intercept station to the Intelligence Center, the transmission of programming orders from the Intelligence Center to each intercept station, and the transmission routine information. Initially, narrow bandwidth wire and radio nets will be furnished. Wide bandwidth communications between the intercept stations and the intelligence center will be provided early enough so that at no time will the ground communication capability cause constraint in rapid data transmission. (SEGRET)

The launch station, each intercept station, and the Intelligence Center will contain the necessary intra-station communications required for efficient operation. (CONFIDENTIAL)

It will be necessary in the early programs to provide space-to-ground telemetering as the major means of conveying vehicle instrumentation data to the ground. It will play a major role in the development cycle, and, therefore, every attempt will be made for a high order of reliability. Standard FM/FM or PWM/FM telemetering techniques will be used in the early program. More refined vehicles will contain space-to-ground telemetering equipment as part of the operational equipment. This will be necessary in order to maintain continuous contact with vehicular equipment so that adjustment and switching of critical circuits may be accomplished by ground command. Consideration will be given to a redundant telemeter transmitter and/or use of the transponder as a telemetering instrument. (CONFIDENTIAL)

Early low latitude orbital flights will provide significant utility by virtue of the fact that ground tracking radars at Patrick AFB, St. Lucia, Ascension, and Hawaii will track a transponder in the vehicle, orbital computation methods will be tested, telemetering equipment will be utilized and possibly direct space-to-ground data transmission will be attempted. (SHCRET)

I. Data Processing and Intelligence Dissemination Subsystem

The ground data handling subsystem must be capable of accepting and rapidly processing visual, ferret and infrared data. It must insure timely dissemination of intelligence and weather information to the using agencies. The scope of activities of this subsystem is shown pictorially in Figure 7.

(UNCLASSIFIED)

The development of this subsystem will be phased to provide the capability for rapidly and efficiently processing increasing quantities of data collected by improved versions of the satellite reconnaissance equipment. (SECRET)

The initial subsystem configuration must be selected so that minimum modification to existing Air Force data handling equipment now in process of research and development is required. During the development of the subsystem, continuing emphasis must be placed on exploiting automatic techniques and determining the most effective human-machine relationships. (UNCLASS)

Page C-11

Throughout the development of the subsystem, authorities in the field of national intelligence and reconnaissance work will be consulted to advise on matters relating to data processing and overall intelligence information flow. The Intelligence Laboratory of the Rome Air Development Center has a group of experts as consultants, through a contract with Boston University, which includes some ten representatives from the Rand Corporation, University of Michigan, and other industrial and university research organizations. (UNCLAS)

The areas which will require development effort (listed below) with their respective functional tasks are:

1. Visual Data Processing Area

Task No. 1 Task No. 2 Task No. 3 Task No. 4 Task No. 5 Task No. 6	Conversion Extraction Indexing Storage Display Dissemination.	(UNCLASSIFIED)
		(UNCLASSIFIED)

2. Ferret Processing Area

Task Task Task	No.	2	Conversion Analysis and Reduction Equipment Presentation Equipment. (UNCLASSIFIED)
			UNCLASSIFIED

3. Infrared Processing Area

An area covering infrared processing with supporting tasks will be added prior to the time the satellite has an infrared collection capability. (SECRET)

4. Personnel and Training Support Area

Task No. 1	Training
Task No. 2 Task No. 3	Qualitative Personnel Requirements
THE NO. 3	Human Engineering (UNCLASSIFIED)

The following constitutes the objectives of each of the tasks within each of the areas:

1. Visual Data Processing Area

Task No. 1 - Conversion: The objective of the conversion task is to develop equipment and techniques which will automatically transform the recorded data as initially received from the satellite into a form amenable to either automatic or human interpretation. (SECRET)

Task No. 2 - Extraction: The objective of this task is the development of equipment and techniques which: (1) render visual input data amenable to analysis in accordance with the needs of the intelligence users and (2) aid in the interpretation, analysis and synthesis of both quantitative and qualitative intelligence information on the basis of photographic and television material. (UNGLASSIFIED)

Page C-12

CONFIDENTIAL

WS 117L DEVELOPMENT PLAN

GDS (cont'd)

2 April 1956

Task No. 3 - Indexing: The objective of the indexing task is to develop procedures which can be used to organize the information contained in the graphic and digital storage devices located in the WS 117L Intelligence Center. With the information properly organized, pertinent information can easily be inserted, located, withdrawn and presented for use by personnel within the WS 117L Intelligence Center. (UNCLASSIFIED)

Task No. 4 - Storage: The objective of this task is to develop equipment which can be used to store for future use information collected by the reconnaissance capability of the WS 117L System. (UNCLASSIFIED)

The information stored will be both graphic (photo maps) and digital (specific target intelligence obtained from photos and ferret intelligence). The digital information will be used in the numerical displays, and the graphic information will be used in projection displays or converted into hard copy for further analysis and dissemination. (UNCLASSIFIED)

The most important criterion for determining the types of equipment needed for storage is the time allowed for withdrawal of information once the location of information is determined by means of index. (UNCLASSIFIED)

Task No. 5 - Display: The objective of this task is to develop equipments and techniques for presenting the various forms of visual and ferret intelligence information visually in the most informative manner. Different display types will be required in the WS 117L Intelligence Center, depending upon user requirements. Basically, the display types are dependent on the jurisdictions of viewers requiring these displays. These display types can

- a. Command type [Very large scale (pictorial)]
- b. Indicator trend type [Large scale (pictorial)]
- c. Indicator trend type (Alpha Numeric)
- d. Dynamic simulator and global display e. D.F Plotter (Ferret only).

(COM IDENTIAL)

Task No. 6 - Dissemination: The objective of this task is to establish the procedures and equipment necessary to communicate stored information (Visual, Ferret and correlated Visual-Ferret) to users in a manner requested. Users will include personnel with the WS 117L Intelligence Center as well as the National Security Council, Air Force Commands and other Government Agencies. The dissemination function of the Intelligence Center will be compatible with the future Air Force Data Handling System (Project 438L). (CONFIDENTIAL)

2. Ferret Processing Area

Task No. 1 - Ferret Conversion Equipment: The objective of this task is to develop equipment for decoding the raw ferret data, correlating the geographic positional data with the ferret data (utilizing time indexing) and producing a single composite magnetic tape comprising the ferret intercept and associated positional data. The data on the tape will be in

Page C-13

GDS (cont'd)

2 April 1956

digital form so as to enable automatic machine manipulation for the rapid extraction of intelligence information. (UNCLASSIFIED)

Task No. 2 - Ferret Analysis and Reduction Equipment: The objective of this task is to develop equipment capable of accepting the data from the conversion equipment and process it in a form suitable to satisfy intelligence user requirements. The information contained in the data at this point will be sorted and redundant data eliminated. The equipment shall have the capability of rendering an immediate indication of activity in preselected frequency bands over specified geographical areas. (UNCLASS)

Task No. 3 - Ferret Presentation Equipment: The objective of this task is to develop equipment which will accept on demand, from the Ferret analysis computer, information and display it in a prescribed manner. The equipment to be developed under this task will include (1) Radar Order of Battle Display (2) Graphical Construction Equipment, and (3) Simulator Displays. (See Task No. 5 under Visual Data Processing Area.) (COMPIDENTIAL)

- 3. <u>Infrared Processing Area:</u> Tasks will be added as decisions on infrared development are made. (UNCLASSIFIED)
 - 4. Personnel and Training Support Area

Task No. 1 - Training: The objective of this task is to develop equipment and techniques for training the interpreter, analyst, operator and maintenance personnel required by the ground data processing subsystem. The training problem is in many respects critical, since the large volume of data and the high rate of information flow to be generated by the ARS will impose heavy burdens upon the human element of the processing subsystem. Of special importance is the need to train photographic interpreters to extract information with considerable speed and accuracy from photographic and television images embodying various forms and degrees of degradation. Otherwise, the analysis and interpretation function may prove a major obstacle to the primary goals of the ARS. (CONFIDENTIAL)

Task No. 2 - Qualitative Personnel Requirements: The objective of this task is to produce Qualitative Personnel Requirements Information (QPRI) covering all analysis, interpretation, operator and maintenance jobs called for by the ground data handling subsystem. Such information is needed to establish manpower and training requirements for the various stages of subsystem development, sufficiently far in advance of operational dates to insure the availability of an adequate number of properly trained personnel. (UNCLASSIFIED)

Task No. 3 - Human Engineering: The objective of this task is to provide all necessary human engineering support for the ground data handling subsystem. In a subsystem as complex as this, the design of equipment and the integration of components into larger units must be accomplished in a manner which takes full cognizance of human capabilities and limitations. The gains to be achieved by appropriate human engineering will include increased ease in operation and maintenance, a reduction in required time and

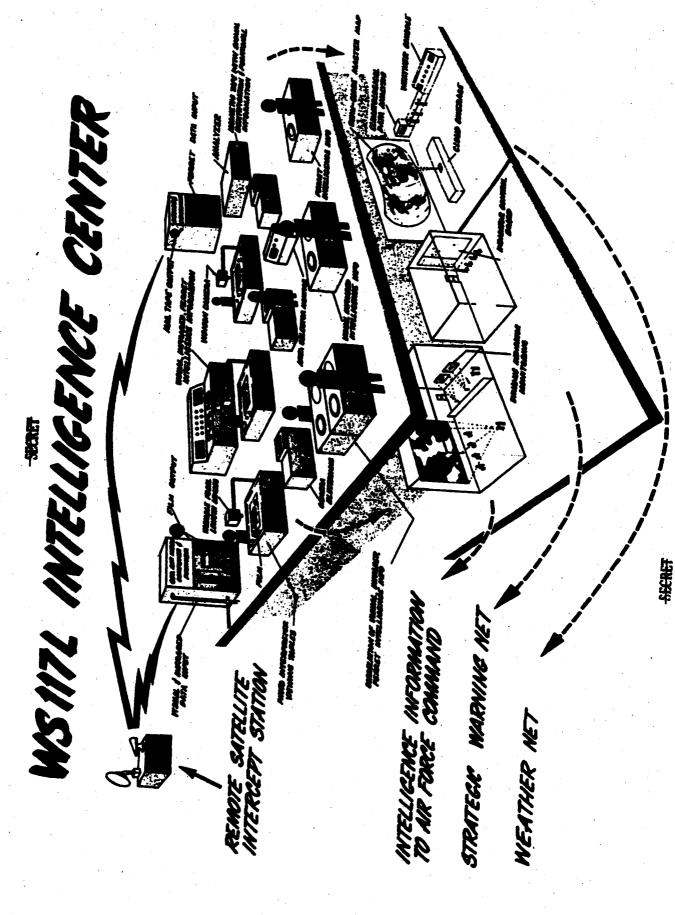


Fig. 7
Page C-14a

WS 117L DEVELOPMENT PLAN

GDS (cont'd)

2 April 1956

complexity of training, the more rapid extraction of visual infrared and ferret information, a speed-up in communication, and more efficient and rapid subsystem routines. (UNCLASSIFIED)

J. Ground Support and Training

- 1. Ground Support: This portion of the subsystem involves all ground items directly involved in testing and launching the orbiting vehicle. Excluded are items that are peculiar to other individual subsystems, such as particular radars, consoles, checkout equipment, components and data handling and transmission units. Under this subsystem, equipment and/or techniques will be developed as required to perform the following functions:
 - a. Transportation and handling of ARS Orbiting Vehicle.
- b. ARS-ICBM marriage-compatability and static testing (Probably at Edwards Air Force Base).
- c. ARS-ICBM assembly and final checkout (Probably at the Prelaunch-Support assembly area at Patrick Air Force Base).
- d. ARS-ICBM (assembled) Transport to launcher and erection (Dependent on Technique).
 - e. ARS-ICBM pre-launch checkout.
 - f. ARS range check.
- g. ARS-ICBM range timing synchronization. h. ARS battery storage, charging and installation; or ARS nuclear power supply storage, safety checkout and installation.
 - i. ARS pad and range safety measures.
 - j. ARS fueling and pressurization storage and handling.
 - k. ARS vehicle measuring and instrumentation operations.
- 1. ARS-ICBM blockhouse operations ARS space requirements not delineated as yet.
- m. ARS-ICBM Launcher modification-flexibility of ICBM launch stand to accommodate overall vehicle length extension due to ARS addition (Approximately 15 - 30 feet). (SEGRET)

The functions and activities listed above necessitate a specific requirement for early and detailed coordination and integration with the applicable ICBM operations. (Captive test site and Pre-launch support and Launch areas.)

2. Training: The training portion of this subsystem involves the orientation and schooling required to establish Operational and Personnel Capability potential. In view of the research and development types of endeavor prevailing in ARS during the first several years, this type of training is not immediately applicable. However, as the system reaches operational readiness, USAF or contractor personnel will be phased into training programs, both "on the job" and in courses designed to suit requirements. (UNCLASSIFIED)

WS 117L DEVELOPMENT PLAN

GDS (cont'd)

2 April 1956

K. Flight Test Subsystem

Equipment will be provided to measure accelerations, vibrations, pressures and temperatures during flight and captive tests. Strain gauges will be applied for structural measurements. Telltales will monitor operations such as stage unlatching and separation. Payload equipment will be instrumented to obtain data on component functioning and failure analysis should malfunction occur. (UNCLASSIFIED)

Both non-orbiting and orbiting test vehicles will be instrumented to obtain data on geophysical environment at and below orbiting altitude. Requirements for geophysical data will be established by the contractor. Development of required geophysical instrumentation and interpretation of geophysical data collected during flight test program will, at the discretion of the WSPO, be accomplished by AFCRC or the prime contractor. Vehicle specifications are covered in vehicle subsystem - "A. Vehicle". Consideration will be given to provision of orbiting test vehicles for the purpose of collecting geophysical data for advancement of the state of the art. (SECRET)

SECRET TO COMPL . REPORTS CONTROL SYMBOL ~ 1 2 3 19 63 2 April 1956 W8 117L 2 3 4 S. NUMBER 1962 DATE 19 61 1 2 3 FMAM CALENDAR YEARS 19 60 S. INITIAL M CHANGE 7020 3 A L OTHER 19 59 • 3 4 19 58 A S O N D J F W □ TASK & D SCHEDULE PROJECT 117L - Advanced Reconnaissance System PROJECT ON TASK NR X SYSTEM Advanced Vehicle Group Auxiliary Power Unit (Non-Orbit Flight Tested) Advanced Propulsion for Ground Tests Complete Electronic Reconnaissance meeting more stringent SCHEDULE Visual Reconnaissance Pioneer Propulsion Guidance and Control Pioneer Equipment Tests Complete Advanced Equipment TITLE requirements Surveillance. Battery Nuclear Advanced Propulsion Advanced Pioneer Solar Advanced Pioner. Pioneer Vehicle 3 TITLE

- Dates at which time subsystem is ready for

ARDC 1 JUL 56 103 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

ARDC , JUL 56 103

																SI	f	R	Ħ	E	-	<u>.</u>															
				į	<u>:</u>	1	\Box	\Box	I	Ţ	I		I	I	I	I		I	I	I	\Box		I	I		I	I	T	I	I	T	I	I	I	Ι	I]
3		İ			7	;	+	+	+	+	+	-	4	4	+	_	4	4	+	4	4	4	4	4	4	4	4	4	\downarrow	4	\downarrow	\downarrow	4	Ţ	\perp	Ţ	\rfloor
2. REPORTS CONTROL SYMBOL			- [- 3	<u>:</u>	+	+	\dashv	+	+	+	-	+	+	\dashv	╅	+	+	+	+	+	+	-+	+	+	+	+	+	╀	╀	╀	+	+	+	+	+	4
8	1	1		<u> </u>	寸,	╗	\dagger	\dagger	+	╅	+	+	+	┪	+	+	+	+	+	+	╅	+	+	+	+	+	+	╁	╁	+	+	+	┿	+	╀	╀	4
Į į	9	-	- 1	10 62	3	1	I		I	1	\perp		I	I		1	I	土		I	I	1	X	Ī	1	1	1	1	T	T	十	+	+	+	†	+	7
ž	1956		- 1	٤	_	7	+	4	4	4	4	- -	4	1	1	1	1	1	1	\perp	Ţ	1	Ţ	\perp	Ţ	Ţ	Ţ	I	I	I	I	I	I	I	Ι	1	1
18	1	1	- 1	├	+;	-	+	+	+	+	+	- -	+	+	4	+	+	+	4	+	4	4	+	+	4	4	+	+	4	1	\bot	4	1	1	╀	1	1
Ě	DATE 2 April	WUMBER WS 117L		9	•	+	+	+	+	+	+	-}	+	+	+	╁	+	+	+	+	╁	+	+	+	+	╁	┿	╀	╀	╀	+	+	+	┿	+	+	+
12	DATE 2 Ap	WS 117		106.9	?[.	1	土	İ	1	1	İ	T	t	1	†	\dagger	T	+	T	\dagger	+	十	+	十	\dagger	+	\dagger	+	十	十	+	+	+	十	╁	╫	†
5	3. 0.	2 3	- 1	_	Ŀ		I	\perp	I	I	I	I	I	I	I	I	I	I	Ι	I	I			I	I	I	T		I	T	I	T	T	I	T	T	†
n	6	4	\dashv	_	با.	_	+	╌	┵	+	4	+	+	+	1	+	4	1	1	4	4	1	1	Ţ	Ţ	1	Ţ	Ţ	Ţ	Ţ	I	Ţ	Ţ	I	I	I	Į
				19 61		#	┿	K	4	╀	+	╀	+	+	+	+	+	+	+	+	+	+	+	+	╁	+	╀	+	╀-	╀	+	+	\bot	+	1	╀	1
1			ı	-	-		+	+	十	+	+	\dagger	Ť	+	+	+	+	+	╁	+	+	╅	+	+	┿	+	k	╅	+	╁	╁	╀	+	╁	╀	╀	+
		1			Ŀ		I	T	1	T	T	Ť	1	1	1	Ť	†	†	Ť	✝	†	†	†	\dagger	Ť	t	Ť	7	十	Ť	t	†	T	十	+	╁	t
l		l	1:	2		+-	I	Ţ	I	I	I	I	I	I	I	T	I	T	I	I	I	I	I	1	I	Ι	Ι	I	Ι	I	I	I	1	İ	İ	İ	1
1		1			난		+	4-	+	+	+	+	+	\bot	1	1	\bot	1	Ş	7	1	4	\bot	Ţ	\bot	Ţ	T	T	F	T	Ţ	T	T	工	oxday	I	I
1		M		19 60	1	+	╫	+	╀	+	╀	+	k	4	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	1	1	1
l		7 4		S -	3	-	+	+	╁	╁	十	+	₽	╄	┿	+	+	┿	╀	╁	+	+	╁	+	╀	╀	╀	╁	╀	╀	╀	╀	╀	╀	╀	╀	+
1		5. INITIAL CHANGE		2	-		T	T	T	†	十	T	十	十	†	t	†	十	t	+	+	+	+	╁	十	十	╁	十	t	╁	╁	╁	十	+-	╁	╁	t
		≅ ÿ	1	ξL	巨	-	I	I	Ι	L	Ι	I	I	I	1	I	I	I	I	I	I	I		İ	İ	İ	İ	İ	士	I	T	T	T	十	†	t	t
i		•	٦,	1	100	-	1	4	╀	╀	+	1	\bot	╀	╀	1	╀	1	L	L	\perp		\perp	L	L	$oxed{L}$		L	L	L	L	I		$oxed{\Box}$		I	I
ŀ			ł		Z	╀	╄	+	╀	╀	╀	╀	╀	+	+	+	╀	╀	+	+	╀	+	4	+	Ļ	1	╀	╀	╄	╀	L	L	1	Ļ	L	L	Į
					-	┢	十	╁	+	╁	十	╁	+	┿	╀	╫	╀	k	╁	+	╀	╀	╁	╁	╀	╀	╀╌	<u>'</u>	╁	╀	╀	╀	╀	╀	╀	╀	Ŧ
	- E	,	1		1		İ	1	†	t	†	k	╅	t	t	t	╈	Ť	7	†	T	╈	十	\dagger	t	t	十	十	╁	H	╁	╁	t	+	╁	╁	t
	Ė			59	5	L	$oxed{\Box}$	L	L	L	I	I	L	Ι	I	I	Ι	I	Ι	I	I	İ		Ī	T	İ	T	I		T	T		T	\top	T	T	t
	🗌 ОТНЕВ			2	그	Ļ	╀	Ļ	1	Ļ	L	┸	1	┸	╀	1	\perp	L	L	\perp	L	L	L	L	L	L	L							${\mathbb L}$			Γ
		•			=	┝	╀	+	1	╀	╀	╀	╀	╀	╀	╀	╀-	╀	╀	╄	╀	╀	╀	╀	╀	╀	L	L	_	L	L	L	L	$oldsymbol{\perp}$	L	L	Į
	×				7	┝	╁	+	╁	╁	╁	十	╀	╁	H	╁	╁	╁	╀	╀	╀	╁	╀	╁	╀	6	₽	╀╌	┝	-	├	╀	╀	╀	├	┡	Ł
m	TASK			1	•	H	†	T	H	t	t	t	t	t	t	t	t	t	t	十	╁	十	十	t	十	۴	1	╁	\vdash	┢	┢	╁	╁	╁	┝	┝	╁
2	'nΙ				7		Ι							T	T	T	T	T	T	十	T	T	T	T	T	T	T	T	1	┢	1	十	1	✝		十	t
SCHEDULE					٥	L	┞	L	L	L	Ļ	L	L	L	L	F	Į	L		Ţ	L	L	L	L	Г		Г							匚			L
Q	- H		1	58	N O	<u> </u>	╀	╁	┝	┞	╀	╀	╀	╀	╀	╀	╀	╀	┡	╀	╀	╀	╀	╀	╀	┞	├-	<u> </u>	L	L	L	┞-	┡	₩	<u> </u>	_	Ļ
	¥		1	2		┝	╁	╁	┝	┝	H	╀	╁	╁	┝	╁	╁	╁	Ͱ	╀	╀	╁	╀	╀	╀	┝	⊢	┝	┝	┝	_	H	┝	H	-	-	╀
4	2	•	1		8 Y			T		H	T	T	1	T	t	†	t	十	一	t	十	†	十	十	t	┢	\vdash		H	-	┝	\vdash	H	H	-		H
Œ	PROJECT	Ĕ		Ш	•			Г										L				I												口			
	ᄓ	S		5												1				l	1																Γ
	3	Advanced Reconnaissance System		15	TASK NR		l	l.			ĺ				l			۵		l		3															l
	E	E	1	3	\$			١.		İ		1	به ا		9			2		١		1			l					Ì							ĺ
	3			Ě	-						١.	l	٥		ğ		يا	ğ		ent		1															
	X SYSTEM	8		H	-	_	1	9	Н	8	4	┝	7	┝	Ä	-	Ë	금	-	1 38	1 23	H	\vdash	⊢	┝	┝	┡	Н	H	H	Н	L	H	Н			H
		5	1	1			호	ğ		8	9	ĺ	2		and Intelligence		H	ပြ		걸	1	0	1		9												
	l	8	w	1	ı		걸	8		ij	뎔				12		띡	5		M		9		l	Training												l
		7	Ę	1	-		ä	18		1C	11		g	l	=		2	Ž	\$	72	Ē	3			뒴												ĺ
		2			-	ı	1e	9			BA:	ts	I		B		검	60	11		Ę	4			Ľ												ĺ
•		2	SCHEDULE				implemented			Į	-	12	7		2		٩	뮤	79	E	1	0			3									l			
	1	Ą		7171.8			4	F		ರ	ğ	1	7		耳	٦	ě	7	죭			12	13		٦.												į
				=	: [(1£	See General Design Spec,		Ground-Space Communications	Test Stations available for	Pioneer Flights	Operational Stations available		Data Processing	Dissemination	ᇰ	with Orbiting Data Collection	Interim Capability	Final with Refined Equip	녆	Processing of Large Onhatities	of Data		Ground Support		7										1
• .			1		1			녱		ğ	ĭta	9	유		Ş	3	1	무	H	3	뎔	2	4		9	Pioneer	Advanced										ļ
		1171			ľ	Infrared	Pioneer	9		7	נע	5	ia.		ž	堳	1	¥	191	1	ĕ	밁	0	l	2	ğ	78.		ı						ļ		
		WS			1	E	P	Q	ļ	ğ	88	ä	9			3	E		Int	뭂	"	~			ğ	M	É				1				١	١	
		3				넴	Д			ũ	H		0			100									ro												
<u>.</u>		<u> </u>								9					4	A							1		٥										- 1		i

2. REPORTS CONTROL STA) (S. MITIAL (X) 6. NUMBER GHANGE		11. CONTR NR 12. PRIORITY AND PREC 13. SECURITY	TEST ITEN	test of WS 117L vehicle HADC and/or APMTC on, including staging, and/or West Coast testing of components launch site	the non orbit test vehicle series is to be tion is to be given to the use of a booster and cale model using a solid propellant booster such it vehicles which can be made available and used	TEST CRITER APPROVAL		DATE	RESPONSELE CENTER APPROVAL
R & D TEST		WS 117L - Advanced Reconnaissance System	CT OFFICER	WDD 117L	14. (TEN 18. * TEST 17EN 19.	1 Non Orbit Test Vehicle Functional configurational altitude steet. Also and subsyst	The design configuration of the non orbidetermined later. Consideration is to full scale vehicle versus a scale model as a Sargeant, also such other vehicles for test such as Asrobee, atc.		M. MANK.	21. NAME ORGANIZATION	22. HAME

ARDC 1 JUL SS 105 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Page E-1 SECRET

TEST ANIEX 2. AEFORTS CONTROL STREOL DAGE DAGE	2. April 1956	System CHANGE CHANGE WS 117L	SUPPORTS (370 or Pred) 10. CONTRACTOR 11. CONTR NR 10. PRIORITY AND PREC 10. SECURITY 11.	TEST DESCRIPTION 19. TEST ASENCY AND SITE	test of station "Contractor & April 58 RADC at APMTC	unctional and evaluation tests **Contractor & Oct 56 April 59 RADC at APMIC	metional tests with specified iputs	Center Center	Tehicular electronic components and assemblies exclusive of payload fill be performed at APMTC, or preferably the operational launch and from Oct 56 to Apr 59.	TEST CHATTER APPROVA	ANIZATION	DATE	RESPONSEL E CENTER APPROVAL	BIAC
		ACE Communications	o. supports (bys or Press)	HUMBER 15. TEST ITEM 16. TEST DESCR	Functional components	2 Vehicle Electronics Exclusive Functional and eval of payload	3 Mester Orbital Computer Functional tests wi inputs	* Twats performed on major components of the APMIC mistion will constitute evaluation tests for all state major components are received at APMIC for insta	## Tast will be performed on all vehicular electrons as they become available. Tests will be performed site (if available), and will extend from Oct 56 to	181	DREANIZATION	SI. NAME ORBANIZATION	A TORRES	

WD-56-00832

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

ARDC : JUL SS 105

21. NAME RESPONSBLE CENTER APPROVAL 22. NAME ORGANIZATION	Page E-3 WD-56-008	The table of the table of the table of the table of table	# 117L - Advanced Reconnaises 117L - Advanced Reconnaises ** ** ** ** ** ** ** ** ** ** ** ** **	BOJECT TASK OTHER System Dissemination Subsystem Supports Grew Fred 10. CONTRACTOR 117L TEST DESCRIPTION TEST DESCRIPTION Complete Data Handling Subsystem TEST DESCRIPTION TEST DESCRIPTION TEST DESCRIPTION TEST DESCRIPTION TEST DESCRIPTION TEST DESCRIPTION TEST DESCRIPTION TEST CENTER APPROVAL TEST CENTER APPROVAL	THE CONTROL RADC I SEP 60 AND AND AND AND AND AND AND AND AND AND	The state of	1. REPORTS CONTROL STABOL 2. April 1956 3. NUMBER WS 117L TY AND PAGE 1 Sep 58 31 Dec 59 1 Sep 60 31 Dec 60 1 Sep 60 31 Dec 60 1 Jan 63 30 Jun 63 1 Jan 63 30 Jun 63 1 Jan 63 30 Jun 63 1 Jan 63 30 Jun 63 1 Jan 63 30 Jun 63 1 Jan 63 30 Jun 63 1 Jan 63 30 Jun 63 1 Jan 63 30 Jun 63 1 Jan 63 30 Jun 63 1 Jan 63 30 Jun 63 1 Jan 63 30 Jun 63 1 Jan 63 30 Jun 63 1 Jan 63 30 Jun 63 1 Jan 63 30 Jun 63	
RESPONSIBLE CENTER APPROVAL ORGANIZATION		341		ORGANIZATION		DATE		
	Ä	Ä		6 ANIZ		DATE		

WS 117L DEVELOPMENT PLAN

FACILITIES PLAN

2 April 1956

Brief descriptions of the facilites contained in this Tab are as follows:

0-1: Captive System Test Facility

Purpose: This facility provides for tests of the complete orbiting vehicle system, the propulsion and APU subsystems, and hazardous components. Captive tests simulating in-flight conditions will be accomplished. The facility will be contractor furnished and operated.

Location: It is proposed that the Captive System Test Facility can be located near the contractor's plant, or possibly at Edwards Air Force Base (ERETS).

<u>Justification</u>: This facility will perform hazard and propulsion tests of the WS 117L vehicle under in-flight conditions prior to actual flight tests.

F-1 and F-2: Flight Test Launching Facility.

<u>Purpose</u>: This facility provides the ground launch complex and support facilities necessary to achieve early orbital and non-orbital flight testing of WS 117L components and techniques.

Location: AFMTC, Florida.

Justification: Since essential support items (i.e., power, communications, etc.) and range instrumentation will be available, subsystem and system tests and low inclination flights can be accomplished. Interference with other programs will be a major point of consideration at AFMTC. The restrictions imposed on WS 117L by the AFMTC range may preclude the firing of R&D Test and Operational vehicles on high inclination orbits. This would limit the usefulness of this range for other than "system shakedown" tests.

L-1: R & D Test and Operational Launching Facility.

Note: This facility is discussed in the Top Secret Annex to the WS 117L Development Plan.

D-1 through D-4: Vehicle Tracking, Control, and Telemetry Stations.

<u>Purpose</u>: Assuming the use of AFMTC for the early flight testing of the WS 117L system and subsystems, four stations (one at AFMTC, plus three down range stations) are proposed. These stations will provide tracking and telemetry contact with WS 117L vehicles (non-orbiting and orbiting) or any other missile flights prior to initiation of the WS 117L launching schedule. This will provide data on the space and ground components.

Location: AFMTC, St. Lucia Island, Ascension Island, and a Pacific Ocean Area Station located to fulfill the low latitude requirement imposed by an AFMTC launch.

SECKET

WS 117L DEVELOPMENT PLAN

Facilities Plan (cont'd)

2 April 1956

Justification: These stations are conceived as an optimum compromise of coverage, security, and logistic support based on the use of AFMTC as the early flight testing complex. They are required so that background can be established in the WS 117L R&D and operational problems prior to high latitude reconnaissance tests.

D-5: Vehicle Intercept, Control, and Data Acquisition Station.

<u>Purpose</u>: In order to fulfill the R&D Test and Operational WS 117L requirements, it is necessary to acquire, track and compute orbital paths, command program the vehicle functions, and receive the visual, ferret, and infrared data from the vehicle.

Location: South Central Continental U.S.A.

Justification: Studies have determined that a South Central U.S.A. station will provide the vehicle intercept, control, and data acquisition capability for both the early orbital flight tests conducted from AFMTC, and for later R&D test and operational flights conducted from the West Coast launch-site.

D-6 and D-7: Vehicle Intercept, Control, and Data Acquisition Station.

 $\underline{\text{Note}}$: These facilities are discussed in the Top Secret Annex to the WS 117L Development Plan.

I-1: WS 117L Intelligence Center and Training Facility.

Purpose: The Intelligence Center will process, reduce, store and evaluate the visual, ferret, and infrared data and then disseminate the resulting intelligence information to the cognizant agencies, in a usable form, for command study planning and action. It is planned that the facility, though GFE, will be operated and maintained by a nucleus of contractor personnel to provide a stable organizational structure with full exploitation of accumulated experience. Training of military and/or contractor personnel will be accomplished at this center to provide a growing complement of people trained in this unique large-scale data handling system.

Location: Studies have shown that a South Central United States location would be most feasible with regard to communications, logistics, and listson.

Justification: Because of the unique data gathering system and the tremendous volume of information that will require processing, reduction, storage, and dissemination, an integrated Intelligence Center is mandatory.

Page F-2

UNCLASSIFIED

WS 117L DEVELOPMENT PLAN

Facilities Plan (cont'd)

2 April 1956

- As a general rule, the following steps in the acquisition of facilities will apply and, as such, constitute critical action dates to be used as check points on the facility acquisition schedule:
- Step 1. Requirements Justification: This is a statement of what is required, when it is needed and why the particular facilities being asked for are necessary. It is prepared on the basis of information compiled by the appropriate technical groups of WDD and participating centers. (UNCLASSIFIED)
- Step 2. Method of Acquisition and/or Selection of Contractor: This step is required when no contract has previously been in existence. Normally the cycle of RFP and evaluation is followed. These first two steps may at times be interchanged. (UNCLASSIFIED)
- Step 3. Preparation of Criteria and/or Formal Application (Based on AFPI 70-249): This is a detailed justification by the contractor or other using agency indicating what is needed to do the job (schedule, costs, and plan). (UNCLASSIFIED)
- Step 4. Notice to Proceed: This is the initial authority to the contractor to allow him to proceed with the facility acquisition. This includes issuance of design guidance by the AF for design of items funded by P-300 funds. (UNCLASSIFIED)
- Step 5. Selection of A and E: This is the selection of an architectural and engineering firm to design the facility. It is accomplished by the contractor or construction agent. In the case of P-131 funded equipment, this step is a Request for Bids. (URCLASSIFIED)
- Step 6. Preliminary Drawings: This step consists of the submission for approval of preliminary drawings and specifications of the item. An actual control estimate based upon these preliminaries is submitted as the basis for funding action. In the case of P-131 equipment, this step is Evaluate Bids. (UNCLASSIFIED)
- Step 7. Final Drawings: The A and E submits for approval the final drawings and specifications. Approval authorizes the prime contractor or construction agency to proceed with selection of a construction contractor. For P-131 equipment, this step is Selection of Successful Bidder and Issuance of Purchase Order, where appropriate. (UNCLASSIFIED)
- Step 8. Construction Contract Award: This occurs after approval of the final drawings and advertising for bid for the construction of the item. A period of time after advertising for bid is required, but award of the contract should normally be made within a week of receiving the bids. For equipment funded with P-131 funds, this step is Delivering of Equipment for acceptance inspection and installation. (UNCLASSIFIED)

Page F-3

UNCLASSIFIED

WS 117L DEVELOPMENT PLAN

Facilities Plan (cont'd)

2 April 1956

Step 9. Beneficial Occupancy Date and/or Construction or Procurement Complete: Facility activation may have started before this date, but normally is considered to start at this time. A period of time will usually elapse before the facility can be used for the purpose for which intended. It is considered as shakedown time. For P-131 equipment, this step indicates installation is complete, followed by shakedown when appropriate. (UNCLASS)

Step 10. Activation Complete: Facility or equipment is usable for purpose for which designed. (UNCLASSIFIED)

Page F-4

Dated: 2 April 1956

WE 117L DEVELOPMENT PLAN

FACILITIES PLAN

Summery - W8 117L Pacilities

		1959	DJF MAMJJASOP											
		1958	N A M J A S O N	9.1		3		9						
- ws 11/L Pacilities	4363;	AMJIA A CIVIN			OT .		01				3 5			
	1956	JASONDJFM			6	4	6	22		84		Refer to Toy Sac:		
	vo. Item		Captive System Fest Pacility (a)	:	<u></u>	Flight Test Launch- ing Facility)e(© €	Flight Test Launch- ing Facility (a)	(2)	(e)	Med Test and Operational Launching Facility		
	. No.		0-1			L-1		*	F-2			3		ŀ

Page F-5

WS 117L DEVELOPMENT FLAN

Dated: 2 April 1956

PACILITIES PLAN

Summery - W8 1172 Pacilities

WS 117L DEVELOPMENT PLAN

DATE: 2 April 1956

Contractor's Plant LOCATION:

propulsion and sumiliary power subsystems will be tested at this facility. INDEX HUBER: 0-1

Pright talts where the resultant from

SUBSYSTEM: This facility will

ITEMS Captive System Test Facility

USING AGENCY: W8 117L Contractor

N 57 - P131 BUDGET CONTROL ESTIMATE:

- January 1957 છ NEED DATE:

SONI M 3 3 A 10 10 ASION DIFMAMISIAISIONDISEMA 10 0 2 ~ 202 88 O) 6 3 0 Ó 9 0 A SON DJENANJJ S 1 13 - m m (a) Vehicle and Propulsion Altitude & Environ-Component and Hazard Instrumentation and Blockhouse & pads mental Chamber Fuel Support Instruments Rquipment **Equipment** Building Builling SCHEDULE: 3 છ

DESCRIPTION AND UTILIZATION:

conditions including auxiliary power units, subjected to various radiation effects. ground retained. Hezard and propulsion tests will be performed under control This facility will test complete vehicles under "in-flight" conditions while

SECRE

This facility being a hazard and security unit will be given careful scheduling and design evaluation.

REMARKS:

Page 7-7

service all subsystems requiring track,

STEEDERS

DATE: 2 April 1956 LOCATION: APMC, Florida

ITEM: Flight Test Launching Facility

USING AGENCY: WS 117L Contractor

SCHEDULE:

GPE & FY 57 P-300 BUDGET CONTROL ESTIMATE.

January 1957 NEED DATE:

June 1958 ન ષ ર્

			ONE							
		1953	JJAS							
			W V W							
1956	ŀ	- 4								
September 1956		JABIO			9					
3	۶	MAMS			; 					
		NDJE			#					
		ASON			‡ <u>‡</u>					
		CIC PA			3 5 6 7.					
	7 7 10	2			E					sy. Bldg.
1956	JASONDIE				10	91				One Half (1/2) of existing Missils Assy. Bldg.
1	7.7		1 8		1	\exists			7	LIZATIC Eleting
			y Period	Feriod 7	Period	Period				1/2) of a
		Buildings	A. Occupancy Pariod	Occupancy Pariod	C. Occupancy Pariod	D. Occupancy Period			TOTAL	A. One Half (1/2) of existing Hist Final Assy., whop water
		Bal	A.	æ,	ပ	Ġ.			DESCR	∀

One Half (1/2) of existing Missils Assy. Blds. (Type #1 or Equiv.) including 5000 sq. ft. hard top storage ramp. For

Anticipated separate facility for handling of hazardous systems.

One (1) Igloo in rocket storage area (for rockets)

One Half (1/2) Igloo in rocket storage area (for igniters and squibs). For storage of T-65 booster rockets, destruct packages, igniters and squibs.

REMARKS: Present APMC facilities will be utilized until Jamuary 1957. HAFB, N.M. can be utilized as an alternative

HS 117L DEVELOPMENT PLAN

SINGULARISE This facility will service all subsystems requiring track, control and talemetry date.

NDEX NUMBER:

ITEMS Flight Test Launching Facility

WS 117L Contractor

USING AGENCY:

DATE: 2 April 1956

LOCATION:

APMC, Florida

BUDGET CONTROL ESTIMATE: GT & FY 56 P-300

Pebruery 1958 December 1957 NEED DATE:

JAISONDJEMAMJIJASONDJEMAMJIJAISONDJEMAMJIJAISONE March 1958 0 6 ġ • 7 9 ģ S Š 4 Assembly and Checkout Two Operational Launch Pads Blockhouse SCHEDULE: Building ບໍ ¥ ë

DESCRIPTION AND UTILIZATION:

the stand, thus requiring access platforms and upper level facilities (air, power, communications, etc.) over and above that available on the standard ICBM stand. Between activation date and WB 117L need date, the Stands will be used to Complex consists of common control and data collection center (blockhouse) serving servicing apparatus, instrumentation and control mechanisms. Final adjustments must be capable of being made on two launching sites, each having both captive and launch test capability. Included are such essential support items

REMARKS:

Page 7-9

SECRET

MD-56-00832

W 117L DEVELOPMENT FLAN SECRET SUBSYSTEM: This facility will service all subsystems requiring

reconnaisance and telemetry data.

INDEX NUMBER:

DATE: 2 April 1956

LOCATION:

West Coast Launching Site

BUDGET CONTROL ESTIMATE. ITEM: R&D Test and Operational Launching Facility

USING AGENCY: USAF and WS 117L Contractor

NEED DATE:

* See Rearts * See Rearts * See Rearts DESCRIPTION AND UTILIZATION.
--

REMARKS:

* This facility is contained in the Top Secret Annex to the WS 117L Development Plan.

Page P-10

SUBSYSTEM: Ground-Space Communications

DATE: 2 April 1956

W 1171 DEVELOPMENT PLAN

INDEX NUMBER: D-1

ITEM:

Vehicle Tracking, Control, and Telemetry

USING AGENCY: USAF and Contractor

LOCATION:

One Complete Station (APATIC)

FY 57 - P300 BUDGET CONTROL ESTIMATE.

April 1958 NEED DATE:

JASONDJEMAMJJJASONDJEMAMJJASONDJEMAMJJASONI R 6 7 4 DESCRIPTION AND UTILIZATION: 7 Station Buildings and SCHEDULE: Equipment

These buildings and equipment constitute the APMIC Vehicle Tracking, Control, and Telemetry station during the and early test phase of the WS 117L program. The space and ground component tests will be carried out in conjunction with WS 107A and other missile flights prior to initiation of the WS 117L launching schedule. R&D and early test phase of the WS 117L program.

REMARKS:

SECRET

Page F-11

W 117L DEVELOPMENT PLAN

DATE: 2 April 1956

D-2 INDEX NUMBER:

SUBSYSTEM: Ground-Space Commiscations

ITEM: Vehicle Tracking, Control, and Telemetry Station

USAF and Contractor

USING AGENCY:

LOCATION: One Complete Station (St. Lucia Island) BUDGET CONTROL ESTIMATE.

FY 57 - P300 . FY 58 - P300 NEED DATE: September 1958

1956 JASON DJEMAMJJJASON DJEMAMJJJASONDJEMAMJJJASIONE Я 0 8 7 4 3 DESCRIPTION AND UTILIZATION: Station Buildings and St. Lucia Island SCHEDULE: Equipment

These buildings and equipment constitute the St. Lucia Island Vehicle Tracking, Control, and Telemetry station

REMARKS:

SECRET Per F-12

SUBSYSTEM: Ground-Space Communications

HS 117L DEVELOPMENT PLAN

DATE: 2 April 1956

INDEX NUMBER: D-3

One Complete Station (Ascension Island) LOCATION:

ITEM: Vehicle Tracking, Control, and Telemetry Station

BUDGET CONTROL ESTIMATE.

FY 57 - P300 FY 58 - P300

USAF and Contractor

USING AGENCY:

NEED DATE: September 1958

SCHEDIII.E.		
	1956	
Ascension Island Station Buildings and Equipment	A NO NO NO NO NO NO NO NO NO NO NO NO NO	JE MAM J JA SOND JEMAM
		8
- • • • • • • • • • • • • • • • • • • •		
DESCRIPTION AND UTILIZATION:	ZATION:	

These buildings and equipment constitute the Ascension Island Vehicle Tracking, Control, and Telemetry station during the RaD initial And Telemetry Trogram.

REMARKS:

Page F-13 SECRET

WE 117L DEVELOPMENT PLAN SUBSYSTEM: Ground-Space Communications

ITEM: Vehicle Tracking, Control, and Telemetry INDEX NUMBER: D-4

USING AGENCY: USAF and Contractor Station.

DATE: 2 April 1956

One complete station LOCATIONS

FY 57 - P300 FY 58 - P300 (Pacific Ocean Area) BUDGET CONTROL ESTIMATE.

October 1958 NEED DATE:

JASIONI ASION DIF MAMIS IS A SOND IFMA Я 0 8 JASONDJEMAMJJ 7 Ġ 'n 1956 DESCRIPTION AND UTILIZATION: Station Buildings and Pacific Ocean Area SCHEDULE: Equipment.

These buildings and equipment constitute the Pacific Ocean area Vehicle Tracking, Control, and Telemetry Station during the R&D and initial test phase of the WB 117L program.

REMARKS:

Page F-14 SECRET

SUBSYSTEM: Ground-Space Commications

INDEX NUMBER: D-5

ITEM: Vehicle Intercept, Control, and Data Acquisition Station USING AGENCY: USAF and Contractor

D-5 ercept, Control, and Data

SECRET.

DATE: 2 April 1956

LOCATION: One complete Station

(South Central Continental United States)
BUDGET CONTROL ESTIMATE: FY 57 - P300

FY 58 - P300

NEED DATE: October 1958

Corners a		
SCHOOLS:	1956	1301
	7 1 6 6 5	1956
	W J CH NO SW P	AMJIJASION DIFMANTITIA COMP
South Central U.S.A. Station Buildings and		
squipment		
DESCRIPTION AND UTILIZATION:	ATION:	

These buildings and equipment constitute the South Central U.S.A. Vehicle Intercept, Control, and Data acquisition This station provides the same capability during station during the R&D and early test phases of the W8 117L program. later R&D and operational test phases of the WS 117L Program.

REMARKS:

SECRET

SUBSYSTEM: Ground-Space Communications

INDEX NUMBER: D-6

Vahicle Intercept, Control, and Date Acquisition Station. HEM:

USING AGENCY: USAF and W8 117L Contractor

SECRET

DATE: 2 April 1956

WE 117L DEVELOPMENT PLAN

One Complete Station (Northwest Continental U.S.) LOCATION:

BUDGET CONTROL ESTIMATE:

NEED DATE: *

Northwest Continental U.S. Station Buildings and Equipment. *	JASON DJE MANJIJASON DJE WANJIJASON
DESCRIPTION AND UTILIZATION.	

* This facility is contained in the Top Secret Annex to the W3 117L Development Plan. REMARKS:

SECRET PAGE 7-16

SUBSYSTEM: Ground-Space Communications

INDEX NUMBER: D-7

ITEM: Vehicle Intercept Control, and Data Acquisition Station

USING AGENCY: USAF and WS 117L Contractor

W 117L DEVELOPMENT PLAN

DATE: 2 April 1956

LOCATION: One Complete Station (Northeast Continental U.S.)

BUDGET CONTROL ESTIMATE:

NEED DATE:

1955 A SON D J F MAM J J A SON D J F MAM J J J F MAM J J J A SON D J F MAM J J J F MAM J J J F MAM J J J F MAM J J J F MAM J J J F MAM J J J F MAM J J J F MAM J J J F MAM J J J F MAM J J J F MAM J J J F MAM J F MAM J

Page F-17

* This facility is contained in the Top Secret Annex to the WS 117L Development Plan

REMARKS:

SUBSYSTEM: This Facility supports the Data Processing and Intelligence Dissemination Subsystems. INDEX NUMBER: I-1

DATE: 2 April 1956

W 117L DEVELOPMENT PLAN

LOCATION: South Central United States

ITEM: W8 117L Intelligence Center and Training Facility

BUDGET CONTROL ESTIMATE: FI 57 - P 300

USING AGENCY: WS 117L Contractor and USAF

NEED DATE: January 1958

SCHEDULE:	1956
	1958
	14 A A A A A A A A A
WS 117L Intelligence	
Center	1-12-13-4-15-46-17-8
Photo. Training Pacility	
Electronic Training	
Facility Infrared Treduction	1 1 4 1 4 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Facility	
	Spele to be defined at Later date.
Equipment to be defined	
at later date	Storie to be defined to be all all
•	
DESCRIPTION AND UTILIZATION.	JZATION: OF THE PROPERTY OF TH

intelligence for Command study, planning and action. The photo training facility will require space for approximately 1800 photo interpreters, specialists and correlators. The electronic training facility will require space for approximately 1200 data analyzers and interpreters. The infrared training facility space requirements are not defined at this development, it will be the Operations Center for conversion of all visual, electronic and infrared data to evaluated The WS 117L Intelligence Center will be used as a Subsystem Development Facility Location for Ground Data Processing and Intelligence Information dissemination. Upon completion of the subsystem

Estimate includes Electronic Training Facility and Photo Training Facility. LEMARKS:

Page 7-18 SECRET

MD-56-00832

WS 117L DEVELOPMENT PLAN

2 April 1956

PROGRAM COST ESTIMATES

The R&D Contract Funds Annex includes both prime and subcontractor costs for the development effort, research and engineering, fabrication and assembly, test operations, and project direction. It also includes those items of center support which are properly chargeable to systems funds.

The Annex does not include the following items:

- Costs of follow-on programs. Cost summaries stop at that
 point where a specific capability will be generated. A
 continuing program to take advantage of increments in
 operational capability will entail additional costs.
- Costs of training of personnel and all other associated costs of the operational Advanced Reconnaissance System.

In connection with the R&D Contract Funds Annex, it should be noted that if funds indicated for FY 1956 are not made available, the funding requirement for FY 1957 must be increased by the amount of any such deficit.

Estimates for facility and installation requirements will be available in the near future.

RED CONTRACT FUNDS ANNEX

ADVANCED RECONNAISSANCE SYSTEM - WS 117L

SUBSYSTEM								
	<u>P600</u>	1956 OTHER	P600	1957 OTHER	P600	958 OTHER	P600	ALS OTHER
1. Vehicle (including boosters)	· •	3.5	3.4	3.0	6.6	16.0	10.0	22.5
2. Propulsion	.5	•	1.0	2.0	-	3.7	1.5	5.7
3. Auxiliary Power Unit	1.0		1.1	•	3.0	.4	5.1	.4
4. Guidance and Control	1.0	-	2.0	-	2.0	4.1	5.0	4.1
5. Visual Reconnaissance	•	•	3.1		4.0		7.1	4.1
6. Electric Reconnaissance	-	-	. 8	-	.8	.9	1.6	.9
7. Infrared			.5	• .	.9	.,	1.4	-
 Ground-space Communication Data Processing and 	1.0	•	.4	9.0	-	16.8	1.4	25.8
Intelligence Dissemination	n -	-	3.8		3.7	4.1	7.5	4.1
10.Ground Support and Trainin		· •	-	2.0	-	4.5	-	6.5
TOTAL	3.5	3.5	16.1	16.0	21.0	54.6	40.6	74.1

Page G-1 SECRET