

WEAPON SYSTEM 117L PROGRAM STATUS REPORT

As of 15 April 1958

RCS AF-XDD-A2

Prepared by
AIR FORCE BALLISTIC MISSILE DIVISION
HEADQUARTERS
AIR RESEARCH AND DEVELOPMENT COMMAND
United States Air Force
Post Office Box 262
Inglewood, California

Copy 2/ of 40

WDPC-58-11





AIR FORCE BALLISTIC MISSILE DIVISION HEADQUARTERS AIR RESEARCH AND DEVELOPMENT COMMAND United States Air Force Post Office Box 262 Inglewood, California

WDPC

0

23 April 1958

WEAPON SYSTEM 117L PROGRAM STATUS REPORT As of 15 April 1958 RCS AF-XDD-A2

FOREWORD

This is the first monthly status report for the Advanced Reconnaissance System, Weapon System 117L. The report covers the. period from 15 March to 15 April 1958. The WS 117L Development Plan, submitted to Headquarters USAF in late March, was dated as of 15 March. Since the Development Plan contains the details of the ARS program, this report assumes general knowledge of the system on the part of all recipients.


B. A. SCHRIEVER

Major General, USAF

Commander







WEAPON SYSTEM 117L PROGRAM STATUS REPORT As of 15 April 1958 RCS AF-XDD-A2

I. SURMARY

The first flight test of the Air Force Air Reconnaissance System (ARS) vehicle will be conducted from Cooke Air Force Base, Galifornia in late 1958 with a THOR-boosted ARS vehicle.

The first flight test of an ATLAS-boosted ARS vehicle is scheduled for mid-1959 from the Air Force Missile Test Center (AFMTC), Florida. The first ATLAS-boosted flight from Cooke Air Force Base is tentatively scheduled for March 1960.

A captive test ARS vehicle, for use in the ATLAS-booster test program, is scheduled for completion in February 1959. It will undergo testing at the Lockheed Missile Systems Division test base at Santa Crus, California. The test facility was completed during April.

A functional mockup of the airframe of the ARS vehicle is nearing completion at Lockheed Aircraft Corporation.

The Eagle Picher Company has been awarded a contract for supplying non-chargeable storage batteries for use with ARS THOR-boosted guided flights.

The Hoffman Company has been awarded a contract for development, fabrication, and testing of prototype photovoltaic solar arrays. The arrays will use solar energy to charge the storage batteries of the vehicle.

A light-weight, all-inertial guidance subsystem is being developed by the Hassachusetts Institute of Technology. Present plans call for the first flight of the subsystem in early 1961.


Successful measurements of infrared radiation from an intercontinental ballistic missile were made during the flight of ATLAS missile 15A. The measurements were taken to determine how an ICBM appears to a satellite-borne infrared scanner during the power and altitude stages of the missile trajectory.

Five tracking and acquisition stations for data collection from ARS launchings will be required. These stations probably will be located in the vicinities of Cooke Air Force Base; Oxnard, California; Kaena Point, Hawaii; Anchorage, Alaska; and Sitka, Alaska.

Design modifications to launch complex 75-3 at Cooke Air Force Base are completed. This complex will be used for launching THOR-boosted vehicles. Siting and design of a launch complex for ARS ATLAS-boosted vehicles at AFMTC are in progress. Design criteria have been established for modifications of the ATLAS launch complex #14 service tower.

2500

WDPC-58-11




Siting of the Cooke Air Force Base and Kaena Point, Hawaii, test tracking stations is complete. Siting of tracking and reconnaissance data acquisition stations in northwest, and central areas of the United States is in progress.

An intelligence interpretation and dissemination facility will be established at Headquarters, Strategic Air Command, Offutt Air Force Base, to serve as the program control center, data collection center, and training center.

A facility to house equipment for the analysis of technical information will be constructed at Wright-Patterson Air Force Base, Chio, for use by March 1960.

A teletype from Headquarters USAF requested a revision of the Financial Annex (Section III) of the ARS Development Plan, dated 15 March 1958, from 214 million to 152 million dollars. It also requested that the program remain flexible. Hajor revisions of program objectives will have to be made if a reduction of this magnitude takes place in the fund program.

CONFIDENTIAL



II. TEST PROCEAM STATUS

A. PLICHT TESTS

- 1. Both ATLAS and THOR missiles will be used in support of the Air Force Advanced Reconnaissance System (ARS) program. THOR-boosted ARS vehicles will be primarily for engineering tests of the orbital capability of the vehicle. Early ATLAS-boosted ARS vehicles will also be used for engineering purposes but, unlike the THOR-boosted vehicles, will contain developmental reconnaissance equipment. These latter vehicles will evolve into the operationally configured ARS.
- 2. The first THOR-boosted ARS vehicle is scheduled for completion in June 1958 and will be launched from Cooke Air Force Base, California in late 1958. Following this initial flight, one THOR-boosted flight per month is tentatively scheduled through August 1959.
- 3. The first ATLAS-boosted flight test of the ARS is scheduled for mid-1959 from the Air Force Missile Test Center (AFRIC), Florida. The launchings of subsequent ATLAS-boosted flights will be transferred to Cooke Air Force Base. The first ATLAS-boosted flight from Cooke is tentatively scheduled for March 1960.

B. CAPTIVE TESTS

- 1. A captive test ARS vehicle for use in the ATLAS-booster test program is scheduled for completion in February 1959. This vehicle will be used for testing at the Lockheed captive test facility at Santa Cruz, California.
- 2. THOR-boosted ARS engineering vehicles will not require captive testing.

III. SUBSYSTEMS

A. AIRFRAME (Lockheed - System Prime Contractor)

A functional mockup of the airframe of the advanced reconnaissance vehicle is nearing completion at the prime contractor's plant. Wind tunnel models of the ARS vehicle and the ATLAS booster are shown in Figure 1. Figures 2 and 3 are model representations of the ARS vehicle.


B. PROPULSION (Bell Aircraft Corporation - Sub-Contractor to Lockheed)

Development has been started on an improved engine for the ARS vehicle. The fuel will be changed from JP-4 to unsymmetrical di-methyl hydrasine (UMDH). This higher energy fuel will permit larger payloads in the ARS vehicle. The point at which this engine will be available for the ARS flight test schedule has not yet been determined. The new fuel will probably not be used until after the first few ARS flights have been made.



:::

•



C. AUXILIARY POWER

- l. Contracts related to the auxiliary power subsystem for the ARS vehicle have been awarded to the Eagle Picher Company and the Hoffman Company. The Eagle Picher Company will supply non-chargeable storage batteries for use with THOR-boosted, guided flights. The Hoffman contract is for development, fabrication, and testing of prototype photovoltaic solar arrays. These arrays will provide solar energy to charge storage batteries used to power various vehicle components.
- 2. Negotiations are underway with Engineered Magnetics Company for a supply of ARS vehicle inverters and voltage regulators to be used on THOR-boosted flights. Modifications have been made to similar components for use on ATLAS-boosted flights.

D. GUIDANCE

A light-weight all-inertial guidance subsystem is being developed by the Massachusetts Institute of Technology to guide the ARS vehicle into orbit and to stabilize its position with reference to the earth while in orbit. Plans call for the first test flight of the subsystem using at ATLAS booster in early 1961.

E. INFRARED

The first successful measurements of infrared radiation from intercontinental ballistic missiles were made from a B-47 during the flight of ATLAS missile 15A. These measurements were the first in a series to determine what an ICBM would look like to a satellite borne infrared scanner during the power and altitude stages of the missile trajectory. This subsystem is being designed to give early warning of an enemy ICBM attack as well as other data. A mockup of the infrared reconnaissance scanner is shown in Figure 4.

F. GROUND-SPACE COMMUNICATIONS (Phileo Corporation - Sub-Contractor to Lockheed)

- 1. The requirements for tracking and acquisition sites necessary for obtaining data from the THOR-boosted ARS vehicle launchings from Cooke Air Force Base have been established. A total of five tracking and acquisition stations will be required. One station will be provided at Cooke, and a downrange tracking station probably will be located in the vicinity of Oxnard, California. Of the remaining three stations, one will be in Hawaii and two in Alaska. One Alaska station will be located in the Anchorage area; the other will be in the Sitka area.
- 2. Radio frequency allocations have been requested for data transmission for the THOR and ATLAS-boosted ARS programs.

CONFIDENTIAL



IV. PACILITIES

A. INVITAL

- 1. Buring April, construction of the test base of the Lockheed Missile System Division at Santa Cruz, California was completed. Installation of the test instrumentation in the components test laboratory at this base was also completed during the mouth. The first tests on the ARS propulsion system components have been conducted at the test facility. The status of the construction underway at this facility as of 18 March is shown in Figure 5.
- 2. The foundations of the static test stands and blockhouse for the ARS program at Santa Crus have been poured. Installation of the test stand superstructure and instrumentation has begun. Construction contracts have been rescheduled to permit hot firings on the test stand by 15 June 1988. The status of the test stand and blockhouse construction as of 18 March is shown in Figure 6.

B. MILITARY CONSTRUCTION PROGRAM

- 1. Besign criteria modifications to launch complex 75-3, Sites 4 and 5, at Cooke Air Force Base have been established. This complex will be used for launching INON-boosted ARS test vehicles. The complex will consist of two launch stands, one blockhouse, and one missile support center. This facility is now under construction. The foundation for the blockhouse has been poured, and the support center is being designed. Construction and instrumentation of the launcher are scheduled for completion by October 1958, in preparation for an ARS launching in late 1958.
- 2. Siting and design of an ATLAS-boosted ARS launch complex in the Cooke Air Force Base area is in progress. A sita in the south Cooke Air Force Base area has been found that will satisfy the site criteris. Headquarters USAF has been requested to obtain approval of the site in this tri-service controlled area. Criteria for the launch complex will be completed in 25 April, and the design will be completed in October. The complex will consist of two launch stands, one blockhouse, and one missile support center. It is saticipated that construction of the complex will be completed by October 1940 in preparation for an ARS launching in March 1960.
- 3. The design criteria for the modification of the service tower on the ATLAS launch complex #14 at APMIC are ready. This complex will be modified during fiscal year 1959 by Convair and Lockheed for use in the ARS program in June 1959.
- Air Force Base and Kaena Point on the Island of Oaha, Remail, have been completed. The construction of an access road to the Kaena Point site is in progress. A tracking, control, and telemetry station will be built at each of these two locations. At each station, a portion has been designed for use during the first year of operation. Construction of these portions will start in May 1958. These interim facilities will consist of one 60-foot

diameter TLM-18 telemetry antenna and receiver building, a tracking radar, and associated structures. The interim facilities will be needed by 1 Hovember 1958. The complete station will have, in addition to the interim facility, one 60-foot diameter ultra high frequency (UHF) telemetry antenna and receiver building (Cooke only), an administration and data processing building (Cooke only), a 10-foot diameter angle tracker, a 6-foot diameter vehicle command transmitting antenna, and associated structures. The complete facilities will be needed by October 1959.

- 5. Van-mounted tracking and transmitting facilities will be provided for use in Alaska by 1 November 1958.
- 6. Siting of ARS tracking and reconnaissance data acquisition stations in the northeast, northwest, and central areas of the United States is in progress. The criteria for the intercept, control, and data acquisition stations for each of these three locations will be completed in June 1958, and the design will be started in June and July. The sites will be selected in May and June. Each of these stations will consist of one VHF and two UHF telemetry antennas 60 feet in diameter, three telemetry receiver buildings, a 10-foot diameter angle tracker, a 6-foot diameter vehicle command transmitter, interstation communications buildings, and associated structures. The facilities in the northeast and northwest areas will be needed by March 1960, and the station in the Central United States will be needed in January 1961.
- 7. An intelligence interpretation and dissemination facility will be located at Headquarters, Strategic Air Command, Offutt Air Force Base. This facility will serve as the program control center, as collection center for all reconnaissance data obtained from the data acquisition stations, and as the training center. Criteria for the facility are being developed, and design will begin in June 1958. Construction is scheduled to start in December 1958, and the facility will be ready for use by the time it is needed in March 1960.
- 8. A facility to house laboratory equipment and instrumentation for the analysis of technical information will be built at Wright-Patterson Air Force Base. The criteria have been developed. The facility will be needed by March 1960.

v. <u>General Status</u>

A. FUNDS

The status of funds in appended separately as is the practice with the monthly AIR FORCE BALLISTIC MISSILES PROGRAM STATUS REPORT.

B. OTHER SIGNIFICANT ITEMS OF INTEREST

A teletype received from Headquarters USAF requested a revision of the Financial Annex (Section III) of the Advanced Reconnaissance

OUNTIDENTIANDEC-58-11

%.

£.



System Development Plan, dated 15 March 1958. This request represents a downward revision of the financial plan from 214 million to 152 million dollars. The teletype requested that the program remain flexible. However, reduction of this magnitude in the fund program will result in the elimination of specific and important reconnaissance capabilities, a delay in achievement of operational status, and a decided increase in the risk aspects of the program without any reduction in the eventual cost of the overall program.

SON-IBENTIAL W

49

WEAPON SYSTEM 117L PROGRAM STATUS REPORT

As of 15 May 1958 RCS AF-XDD-A2

Prepared by

AIR FORCE BALLISTIC MISSILE DIVISION
HRADQUARTERS

AIR RESEARCH AND DEVELOPMENT COMMAND -
United States Air Force

Post Office Box 262

Inglewood, California

OFFICIAL FILE COPY

Office of Record

DOWNGRADED AT 12 YEAR INTERVALS: NO CARTOMATICALLY DECLASSIFIED: DOD DIR 5200.10

Copy 45 of 45

WOPC-58-1



AIR FORCE BALLISTIC MISSILE DIVISION
HEADQUARTERS
AIR RESEARCH AND DEVELOPMENT COMMAND
United States Air Force
Post Office Box 262
Inglewood, California

WDPC

23 May 1958

WEAPON SYSTEM 117L PROGRAM STATUS REPORT
As of 15 May 1958
RCS AF-XDD-A2

FOREWORD

This is the second of the monthly Weapon System 117L Program Status Reports which were established by Headquarters USAF TWX, AFDRD-EX 58935, dated 2 April 1958.

Major General, USAF

mander

+58-15



WEAPON SYSTEM 117L PROGRAM STATUS REPORT As of 15 May 1958 RCS AF-XDD-A2

I. <u>SUPMARY</u>

Work on the first THOR-boosted Advanced Reconnaissance System (ARS) vehicle is on schedule. System installation design is proceeding satisfactorily.

A breadboard model of the visual reconnaissance subsystem for the ARS program was demonstrated at Eastman Kodak Laboratories on 24 April.

Because B-47 aircraft are being used to obtain measurements of infrared (IR) radiation from ICBMs, the emergency grounding of all B-47 type aircraft has temporarily halted the Infrared Measurements program.

A contract with the Ramo-Wooldridge Corporation provides for design and implementation of the intelligence data handling system for the ARS. Subcontracts have been negotiated with ITEK Corporation, Broadview Research Corporation, Systems Laboratories Corporation, and Planning Research Corporation. A project and program control procedure has been established.

Construction drawings and specifications for the interim tracking and telemetry stations at Cooke Air Force Base, California and at Kaena Point, Hawaii were released for construction. The stations are scheduled for completion 1 September.

Construction of launch stands and blockhouses for the THOR-booster complex in the south Cooke area is on schedule.

Fort Stevens, Oregon has been recommended for the site of the northwest United States tracking and data acquisition station. A final selection for the northeast United States station is scheduled for the week of 9 June. Locations for a central site are being reviewed.

The Preliminary Operations Plan for the ARS was published in April and forwarded to Headquarters USAF for approval.

A newly formed Air Force Bioastronautics Division at Inglewood, Galifornia, will function as a consultant and liaison group for all ARS blowedical activity. This Division worked with Lockheed to prepare a work statement covering production of five biosatellite recovery capsules. The capsules will permit the launch, orbit, and recovery of animal subjects. The first launch of four mice is programmed for January 1959.



II. TEST PROGRAM STATUS

FLIGHT TESTS

Work on the first THOR-boosted Advanced Reconnaissance System (ARS) vehicle continued on schedule. The vehicle is scheduled for completion in June. Although no major milestones in the flight test program were scheduled for this reporting period, system installation design milestones were successfully achieved. See Figures 1 through 4.

III. SUBSYSTEMS

A. AIRFRAME (Lockheed - System Prime Contractor)

- 1. Four segmented steel tanks were completed. These tanks will be used as back-up for the aluminum tanks which are planned for flight test use. Three tanks failed when subjected to pressure tests. The fourth tank was modified and successfully passed pressure tests but is slightly heavier than the desired weight.
- 2. A welding machine for assembling spun aluminum tanks was received, and training in its use is underway. Efforts are being made to reduce the number of manufacturing processes involved in producing the aluminum tanks. One result of these efforts is the elimination of the chem-mill process.
- 3. Problems previously encountered in the welding of magnesium thorium alloys used for structure and skin are being eliminated as experience is gained. The elimination of these problems removes one of the possible delaying factors in the flight schedule.
- 4. An early test on the helium regulator used for pressurizing propellant tanks indicated a technical problem area. However, tests on a second helium regulator produced by Robert Shaw Fulton Company were satisfactory. Failure on the early test was attributed to faulty test procedure and metal chips found in the regulator assembly.

B. <u>VISUAL RECONNAISSANCE</u>

The breadboard model of the visual reconnaissance subsystem for the ARS program was demonstrated at Eastman Kodak Laboratories on 24 April. Included were airborne equipment and equipment for recording data at the ground station. The airborne portion consisted of the camera, the processor, and the readout scanning mechanism operating in series. The ground portion was a separate unit with a complete readout device scanning simulated photography which was displayed on the ground reconstruction device.

C. INFRARED

Because B-47 aircraft are being used to obtain measurements of infrared (IR) radiation from ICBMs; the emergency grounding of all B-47



type aircraft has halted the Infrared Measurements program until 28 May. The program will measure radiation from all ICBMs to be launched at the Air Force Missile Test Center. Additional detailed information is being acquired from a similar measurement program which has already produced very successful results. These results indicate that IR radiation from ICBMs may be much greater than previously estimated. Data from one ATLAS flight and one VANGUARD flight indicated that sensing equipment was saturated with IR radiation at a range of 600 miles.

D. <u>INTELLIGENCE DATA HANDLING</u>

A contract with the Ramo-Wooldridge Corporation provides for the design and implementation of the intelligence data handling system for the advanced reconnaissance satellite. Major subcontracts were negotiated by R-W in this period with ITEK Corporation for the major optical assemblies and devices; Broadview Research Corporation for photo interpretation keys and equipment requirements; Systems Laboratories Corporation for geodetic calculations and applications; and Planning Research Corporation for application of their intelligence parameter work. A mutually agreeable working relationship with Lockheed has been achieved to insure the coordination of effort and the timely and orderly exchange of information required for the most expeditious development of the total system. To fulfill the Air Force responsibility of overall management control of these two parts of the system, a project and program control procedure identical to the one established for the ballistic missiles programs is being followed.

IV. <u>PACILITIES</u>

MILITARY CONSTRUCTION PROGRAM

- 1. Construction drawings and specifications for the interim tracking and telemetry station at Cooke Air Force Base have been completed and released for construction. Bid opening is scheduled for 27 May. Construction will be completed by 15 August and equipment will be installed by 1 November. Design of the complete station has been initiated and is scheduled for completion by 1 September.
- 2. Construction of launch stands and blockhouses for the THOR booster launch complex at Cooke Air Force Base is progressing on schedule. Modification of existing buildings for an interim missile assembly facility will begin early in June.
- 3. Discussions with the Navy indicate that a firm decision on the site for an ATLAS booster launch complex in the south Cooke area is expected within a week. Design and preparation of construction drawings for the launch complex, including a missile assembly building, will begin in June.
- 4. Construction drawings and specifications have been completed and released for construction of the interim tracking and data acquisition station at Kaena Point on the island of Oahu, Hawaii. Bids were opened on

9 May, and a construction contract was awarded during the week of 12 May. Beneficial occupancy date is 15 August, and installation of equipment will begin at that time. The need date is 1 November. Design of the complete station has been started and will be completed by 1 September. Construction of the access road has been completed.

- 5. The site survey team recommended Fort Stevens, Oregon for the site of the northwest United States tracking and data acquisition station. Approval for use of this site is being requested from Headquarters USAF.
- 6. Riectronic survey crews are investigating sites proposed for the northeast United States tracking and data acquisition station. It is expected that the site survey team will recommend a final northeast site by 31 May. The final site selection is scheduled for the week of 9 June.
- 7. A meeting was held with the Corps of Engineers and the Air Force Installation Representative at Omaha, Nebraska to consider the location of a central site. A list of thirteen suggested sites is being reviewed. Five sites will be selected for site studies. The initial studies are scheduled for the last week in May.

V. PRODUCTION STATUS

The first ARS vehicle is scheduled for shop completion late in June. The present plan for manufacture and checkout provides for component fabrication at Lockheed (LMSD), Van Nuys, California; vehicle assembly at LMSD, Sunnyvale, California; subsystem installation, modification and checkout at LMSD, Palo Alto, California; engine firing and system checkout at LMSD, Santa Cruz, California; and final checkout at Cooke Air Force Base and the Air Force Missile Test Center.

VI. OPERATIONAL CAPABILITY STATUS

A. OPERATIONAL PLANNING

- 1. The Preliminary Operational Plan for the ARS was published in April and forwarded to Headquarters USAF for approval.
 - 2. An ARS Weapon Phasing Group charter was published.

B. OPERATIONAL SITES AND FACILITIES

The south Cooke Air Force Base area was selected as the optimum location for conducting ARS launches. An agreement between the Navy and the Air Force provided for the Air Force to make soil borings for the ARS complex in the south Cooke area if the borings would not interfere with either present or projected Navy plans for that area. Action was taken immediately to have the architect-engineer proceed with the soil borings.

SEMFIDENTA

VII. GENERAL STATUS

A. STATUS OF FUNDS

Appended separately.


B. OTHER SIGNIFICANT ITEMS OF INTEREST

- Inglewood, California, was directed on 23 April. The Bioastronautics Division will function as a subsystem consultant and liaison group for all biomedical activity in ARS. In conjunction with Lockheed, Bioastronautics Division prepared a work statement dated 14 May which will result in a contract to produce five Biosatellite Recovery Capsules (BRC) for ARS vehicles. These BRC will permit the launch, orbit, and recovery of animal subjects. The animals will suffer no irreversible biological damage. Collection of biological and environmental data such as temperature, humidity, pressures, acceleration, cosmic radiation, weightlessness, psychological responses, etc., will be assured. Mice, rats, and small primates will be used. The first launch of four mice is programmed for January 1959.
- 2. During May the Qualitative Personnel Requirements Information (QPRI) program for ARS progressed satisfactorily. A list of assumptions were formulated, approved, and forwarded to LMSD for inclusion in a QPRI report due on 30 June. The draft QPRI report will be completed by 30 May. Coordination, review, and approval of the document for publication will be accomplished during the first week in June. This report will be time-phased for an operational date of early 1961 for the Pioneer visual and Pioneer Ferret subsystems. The Northeast and Northwest operational tracking and acquisition stations will be operated by military personnel by 1961.


DPC-

Full scale functional mockup of WS-1171 vehicle and ATLAS adapter.

ZONHDENTZY

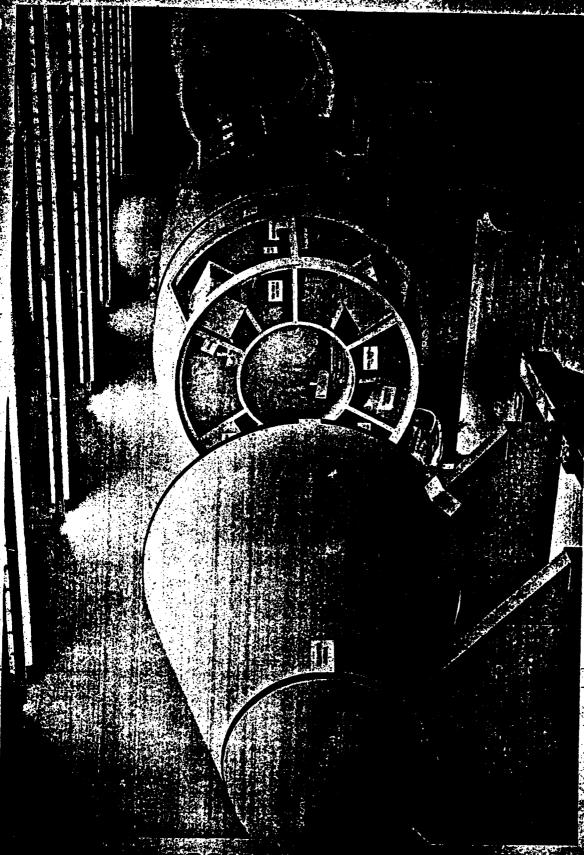


Exploded view of the WS-117L vehicle mockup and ATLAS adapter showing from front (A) Nose cone with detachable nose cap (B) Midbody with forward and aft equipment (C) ATLAS adapter section (D) Un-installed, spherically nested fuel and acid tank the vehicle.

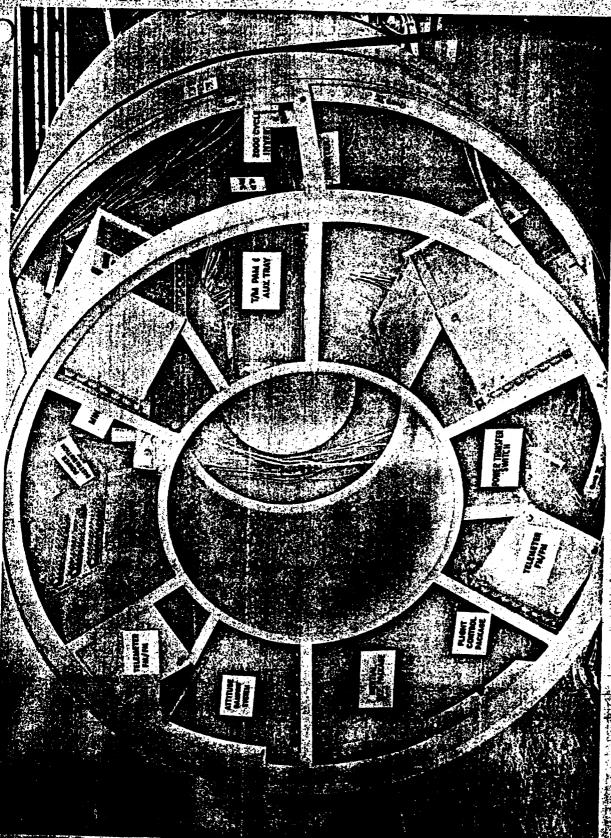

56/

NS-117L vehicle functional mockup, midbody forward equipment rack with partial equipment

CONTINE

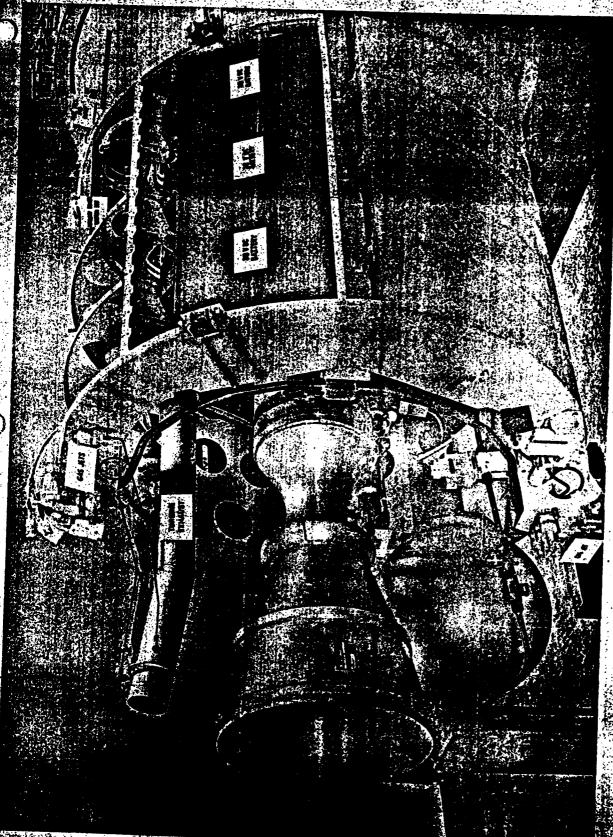

78-1171 vehicle functional mockup, aft equipment rack which surrounds the vehicle engin

4 (MDPC-58-15)

DISTRIBUTION

Headquarters, United S				
meandariers, nulled 8	tates Air Tor			• • • • •
	THE STATE SAT	66		. 10
Commanday At- Dagana				
Commander, Air Researc	A and Develor	ment Commen		
Walter and Seat William Co.			•	
Ballistic Missiles Off	4 /W- AND			بعديد أأرا ومردو هموه وأرأهاه
PAT PATES OFF	TCG (NG WHT)	and the second of the control of the	•	
Assistant CINGSAC (SAC				·
ABBLECHRE GINGSAC (RAC	A MITTER 1			
10000				
Ale Pausa Battland - wa			24 A	
Air Force Ballistic Mi	BBILA Divició	n (He ADDC)		14
		" (HE AREC)		- 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
The state of the s				

50

APR 30 1958

The same and the same of the s

Market Carried Records Spring Relations Spring Relations

A. The Alto Intertion Deard, chalgroganed by Coloral Mary agreed to secupt the proposition of the SAS maker on the Repol-Oriental Pulls, that the ARES would be depoint to be impated at Course for photolog the Strategy and Sate Ampaintition this Survey Seen's work in the field. Technical extincts and games provide ments for the ARES here not been generated in jet for the Mile Soloption Deard's consideration.

SIGNED

CAMBLES E. THROTE, Jr., Colonia, Star Supply Communica Supply Communica

DOWNGRADED AT 12 YEAR INTERVALS: HUT AUTOMATICALLY DECLASSIFIED. DOD DIR 5200.10



all 51


For Period 15 April to 31 May 1958

RCS AF-IND-A2

Prepared by
AIR FORCE BALLISTIC MISSILE DIVISION
HEADQUARTERS
AIR RESEARCH AND DEVELOPMENT COMMAND
United States Air Force
Post Office Box 262
Inglewood, California

MHEIDENTIA

Copy 29 of 50



alt

AIR FORCE BALLISTIC MISSILE DIVISION
HEADQUARTERS
AIR HESEARCH AND DEVELOPMENT COMMAND
United States Air Force
Post Office Box 262
Inglewood, California

WDPC

10 June 1958

, B/6 EN.

WEAFON SYSTEM 117L PROGRAM STATUS REPORT For Period 15 April to 31 May 1958 RCS AF-XID-A2

FOREWORD

This is the second of the menthly Weapon System 117L Program Status Reports which were established by Headquarters USAF TMX, AFIRD-EX 58935, dated 2 April 1958.

The Advanced Recommaissance System vehicle has recently been renamed the "Sentry".

Permission was granted in May to change the as of date of this report from the 15th of each month to the end of each month. This date is more compatible with the reporting system established for the Weapon System 117L program.

jor General, USAR

CONFIDENTIAL



WEAFON SISTEM 117L PROGRAM STATUS REPORT For Period 15 April to 31 May 1958 RCS AF-XXD-A2

I. SUMMERY

Work on the first THCR-boosted Advanced Reconnaissance System (ARS) vehicle is on schedule. System installation design is proceeding satisfactorily.

A breadboard model of the visual recommaissance subsystem for the ARS program was demonstrated at Eastman Kodak Laboratories on 24 April.

Because B-47 aircraft are being used to obtain measurements of infrared (IR) radiation from ICBMs, the emergency grounding of all B-47 type aircraft has temporarily halted the Infrared Measurements program.

A contract with the Ramo-Wooldridge Corporation provides for design and implementation of the intelligence data handling system for the ARS. Subcentracts have been negotiated with ITEK Corporation, Broadview Research Corporation, Systems Laboratories Corporation, and Planning Research Corporation. A project and program control procedure has been established.

Construction drawings and specifications for the interim trackings and telemetry stations at Cooke Air Ferce Base, California and at Kaena Point, Hawaii were released for construction. The stations are scheduled for completion 1 September.

Construction of launch stands and blockhouses for the THOR-booster complex in the South Cooks area is on schedule.

Fort Stevens, Oregon was approved as the site of the northwest United States tracking and data acquisition station. A final selection for the northeast United States station is scheduled for the week of 9 June. Locations for a central site are being reviewed.

The Preliminary Operations Plan for the ARS was published in April and will be forwarded to Headquarters USAF for approval.

A newly formed Air Force Bioastronantics Division at Inglewood, California, will function as a consultant and liaison group for all ARS biomedical activity. This Division worked with lockheed to prepare a work statement covering productions of five biosatellite recovery capsules. The capsules will permit the launch, orbit, and recovery of animal subjects. The first launch of four mice is programmed for January 1959.

HDPC-58-17

CONFIDEN



II. TEST PROGRAM STATUS

FLIGHT TESTS


Work on the first THOR-boosted Advanced Reconnaissance System (ARS) vehicle continued on schedule. The vehicle is scheduled for completion in June. Although no major milestones in the flight test program were scheduled for this reporting period, system installation design milestones were successfully achieved. See Figures 1 through 4.

III. SUBSYSTEMS

A. AIRFRANK (Lockheed - System Prime Contractor)

- l. Four segmented steel tanks were completed. These tanks will be used as back-up for the aluminum tanks which are planned for flight test use. Three tanks failed when subjected to pressure tests. The fourth tank was modified and successfully passed pressure tests but is slightly heavier than the desired weight.
- 2. With the cooperation of the Sandia Centrifuge Section, inertial leading tests were performed on the first spun aluminum flight tank and one segmented steel tank. Both passed the tests successfully. The aluminum tank, completed on 24 May, was pressure tested to 85 psi and then flown to Sandia. The cooperation of the Atomic Energy Commission and Sandia on these tests was exceptional.
- 3. A welding machine for assembling spun aluminum tanks was received, and training in its use is underway. Efforts are being made to reduce the number of manufacturing processes involved in producing the aluminum tanks. One result of these efforts is the elimination of the chem-will process.
- 4. Problems previously encountered in the welding of magnesium thorium alloys used for structure and skin are being eliminated as experience is gained. The elimination of these problems removes one of the possible delaying factors in the flight schedule.
- 5. An early test on the helium regulator used for pressurizing propellant tanks indicated a technical problem area. However, tests on a second helium regulator produced by Robert Shaw Fulton Company were satisfactory. Failure on the early test was attributed to faulty test precedure and metal chips found in the regulator assembly.
- 6. It has been determined that a single helium been extension would assure proper vehicle aerodynamic stabilization at the lower erbital altitudes assumed for early Program IIA flights. Redesign work is in progress. However, engineering affert to increase the functional reliability of the twin-been extension sectionism is continuing. Program IIA flights will be THOR-boosted for early orbital capability.

MDPC-58-1



7. Small vanes, or fins, are being added to the aft end of the ARS vehicle for vertical stabilization. The additions will permit better alignment of the center of pressure and the center of the gravity in the vehicle.

B. AUXILIARY POWER

In addition to battery power, the use of solar power for the tracking beacens is being considered for Program 11A flights. Design effort is being coordinated with temperature, efficiency, and power requirement studies to determine how the solar power collectors can be incorporated into the Program 11A flight vehicles as soon as possible.

C. VIBUAL RECONNATSBANCE

The breadbeard model of the visual reconnaissance subsystem for the ARS program was demonstrated at Eastman Kodak Laboratories on 24 April. Included were airborne equipment and equipment for recording data at the ground station. The airborne portion consisted of the camera, the processor, and the readout scanning mechanism operating in series. The ground portion was a separate unit with a complete readout device scanning simulated photography which was displayed on the ground reconstruction device.

D. INTRARED

Because B-47 aircraft are being used to obtain measurements of infrared (IR) radiation from ICBMs, the emergency grounding of all B-47 type aircraft has halted the Infrared Measurements program through May. The program will measure radiation from all ICBMs to be launched at the Air Force Missile Test Center. Additional detailed information is being acquired from a similar measurement program which has already produced very successful results. These results indicate that IR radiation from ICBMs may be much greater than previously estimated. Data from one ATIAS flight and one VANCHARD flight indicated that sensing equipment was saturated with IR radiation at a range of 600 miles.

E. INTELLIGENCE DATA HANDLING

A centract with the Rame-Wooldridge Corporation provides for the design and implementation of the intelligence data handling system for the advanced reconnaissance satellite. Major subcontracts were negotiated by R-W in this period with ITEK Corporation for the major optical assemblies and devices; Broadview Research Corporation for photo interpretation keys and equipment requirements; Systems Laboratories Corporation for geodetic, calculations and applications; and Planning Research Corporation for application of their intelligence parameter work. A untually agreeable working relationship with Lockheed has been achieved to insure the coordination of effort and the timely and orderly exchange of information required for the most expeditious development of the total system. To fulfill the Air Force responsibility of everall management control of these two parts of the system, a project and program control precedure identical to the one established for the ballistic missiles programs is being followed.

IV. PACILITIES

MILITARY COMBINIOTION PROGRAM

- 1. Construction drawings and specifications for the interim tracking and telemetry station at Cooks Air Force Base have been completed and released for construction. Construction will be completed by 15 August and equipment will be installed by 1 November. Design of the complete station has been initiated and is scheduled for completion by 1 September.
- 2. Design criteria for the ARS intelligence center at Offutt Air Force Base are scheduled to be completed and available for review by 15 June.
- 3. Construction of launch stands and blockhouses for the THOR booster launch complex at Cooks Air Force Base is progressing on schedule. Medification of existing buildings for an interim missile assembly facility will begin early in June.
- 4. Air Staff approval was obtained to site two launchers and a blockhouse for the ARS program in the south Cooke Air Force Base area. Since the Air Staff approval stated that the siting must conform to the Mavy master plan, the proposed site location was forwarded through Mavy channels for further Mavy approval. Local Mavy authorities at Point Mugu agreed to site the facility as presented by the Air Force. Launch facility design criteria review is scheduled for the first week in June.
- 5. Construction drawings and specifications have been completed and released for construction of the interim tracking and data acquisition station at Kaena Point on the island of Oshu, Hawaii. Bids were opened on 9 May, and a construction contract was awarded during the week of 12 May. Beneficial occupancy date is 15 August, and installation of equipment will begin at that time. The need date is 1 November. Design of the complete station has been started and will be completed by 1 September. Construction of the access road has been completed.
- 6. The site survey team recommended Fort Stevens, Oregon, for the site of the northwest United States tracking and data acquisition station. Electronic surveys of the site indicate that it is satisfactory for ARS operations. Because this site was the first priority choice of the Site Selection Board, it was decided to obtain Board approval by message instead of convening the Board. All Board members approved the location for the northwest station at Fort Stevens. After finalisation, recommendations will be submitted to Headquarters USAF for approval.
- 7. Electronic surveys of proposed locations for the northeast United States tracking and data acquisition site were completed on 31 May. The Site Selection Board will meet on 9 June to make the final decision on the site.

MDPC_58_17

CONFIDENTIAL

- 8. A meeting was held with the Corps of Engineers and the Air Force Installation Representative at Omaha, Mebraska, to consider the location of a central United States tracking and data acquisition site. The site selection team started survey activities on 26 May. The Selection Board will meet on 9 June to select central locations for electronic surveys. It is tentatively planned to convene the Site Selection Board on 15 July to make a final decision on the central site location.
- 9. Review of plans and specifications and award of construction contract for the interim test tracking station at Annette Island, Alaska, will be accomplished during June. Completion is scheduled for mid Angust.
- 10. An existing aircraft control and warning station at Cape Chimiak, Kodiak Island, Alaska, is to be occupied as an interim test tracking station. This arrangement will eliminate the need for construction of any new facilities.

V. PRODUCTION STATUS


The first ARS vehicle is scheduled for shop completion late in June. The present plan for manufacture and checkout provides for component fabrication at Lockheed (IMED), Van Muys, Galifornia; vehicle assembly at IMED, Sunnyvale, California; subsystem installation, modification and checkeut at IMED, Palo Alto, California; engine firing and system checkout at IMED, Santa Grus, California; and final checkout at Cooke Air Force Base, and the Air Force Missile Test Center.

VI. OPERATIONAL CAPABILITY STATUS

A. OPERATIONAL PLANNING

- l. The Preliminary Operational Plan for the ARS was published in April and will be forwarded to Headquarters USAF for approval.
 - 2. An ARS Wespon Phasing Group charter was published.
- 3. The first meeting of the ARS Wespon System Phasing Group was held 21 and 22 May. Briefings were presented on the background and status of the system, the various subsystems, and the content of the ARS Preliminary Operational Plan. A Communications and Electronics Subcommittee was established. The Subcommittee was specifically directed to investigate preblems concerning frequency allocations to the ARS program and system requirements that dictate the extreme bandwidth in the ground point—to—point communication system. The Communications and Electronics Subcommittee will also investigate any communication and electronic problem which could have bearing on the ARS program.

NDP6_58-17



Chumanantal

B. OPERATIONAL SITES AND PACILITIES

The south Cooks Air Force Base area was selected as the optimum location for conducting ARS launches. An agreement between the Mavy and the Air Force previded for the Air Force to make soil borings for the ARS complex in the south Cooks area if the borings would not interfere with either present or projected Mavy plans for that area. Action was taken immediately to have the architect-engineer proceed with the soil borings.

VII. GENERAL STATUS

A. STATUS OF FUNDS

Appended separately.

B. OTHER SIGNIFICANT ITEMS OF INTEREST


- Inglewood, Galifornia, was directed on 23 April. The Bieastronautics Division at Inglewood, Galifornia, was directed on 23 April. The Bieastronautics Division will function as a subsystem consultant and liaison group for all biomedical activity in ARS. In conjunction with Lockheed, Bioastronautics Division prepared a work statement dated ll May which will result in a contract to produce five Biosatellite Recovery Capsules (ERC) for ARS vehicles. These BRC will permit the launch, orbit, and recovery of animal subjects. The animals will suffer no irreversible biological damage. Collection of biological and environmental data such as temperature, humidity, pressures, acceleration, cosmic radiation, weightlessness, psychological responses, etc., will be assured. Mice, rats, and small primates will be used. The first launch of four mice is programmed for January 1959.
- 2. During May the Qualitative Personnel Requirements Information (QPRI) program for ARS progressed satisfactorily. A list of assumptions were formulated, approved, and forwarded to IMED for inclusion in a QPRI report due on 30 June. Coordination, review, and approval of the report for publication will be accomplished during the first week in June. This report will be time-phased for an operational date of early 1961 for the Pioneer visual and Pioneer Ferret subsystems. The northeast and northwest operational tracking and acquisition stations will be operated by military personnel by 1961.



/ 0/ 0

Full scale functional mockup of WS-117L vehicle and ATLAS adapter, Figure i.


CONFIDENTIAL

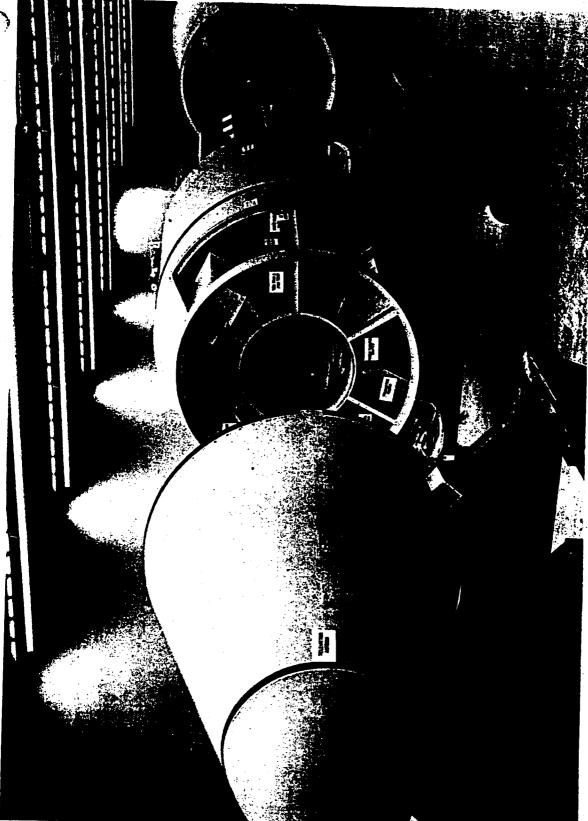

Exploded view of the WS-1175 vehicle mockup and ATLAS adapter showing from front to rear;
(A) Nose cone with detachable nose cap (B) Midbody with forward and aft equipment racks
(C) ATLAS adapter section (D) totanstalled, spherically nested fuel and acid canks for the vehicle. Figure 2.

CONFIDENTIAL

(IDPC-58-17

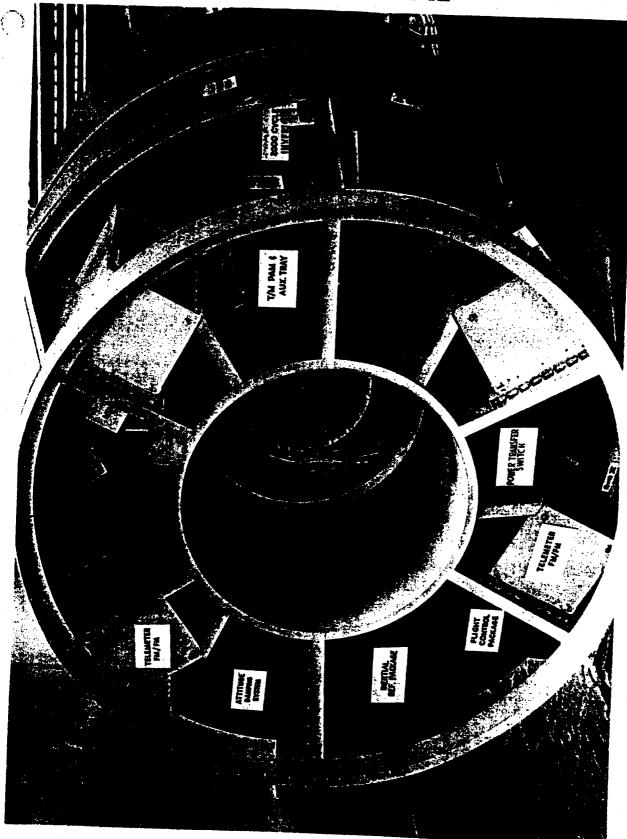

0

WS-117L vehicle functional mockup, addbody corward equipment rack with partial equipment installed. Figure J.

CONFIDENTIAL

89/

WS-117L vehicle functional mockup, aft equipment rack which surrounds the vehicle engine installation. Figure 4.

CONFIDENTIAL



DISTRIBUTION

Headquarters	, United States Air Force
Commander,	ir Research and Development Command
Commender-in	Chief, Strategic Air Command
Army Ballist	ic Missile Agency
Ballistic Mi	ssiles Office (Hq AMC)
Assistant CI	MCSAC (SAC MIKE)
Air Force Re	llistic Missile Division (Ho ARDC)

R

June 13 19 3 2

PRICRITY

COMPR, AFEMD, INGLEWOOD, CALIFORNIA

HQ USAF

INFO FOR: CINGSAC OFFUTT AFB NEBRASKA



SECRET FROM WDTSR 6-17-E FOR AFCGM - COL A. E. KRIEGER = INF# AFCIN - COL KEMP

INFO FOR: AFOIE - COL MCCARTY - AFOOP-OC-R - MAJOR BROWN

INFO FOR: CINCSAC - D/I - COL SMITH

THE WS 117L SITE SELECTION BOARD IN A MEETING AT AFRAD ON 9 JUNE 58 CONSIDERED THE PROBLEM OF SITING THE INTELLIGENCE CENTER FOR WS 117L. THIS FACILITY IS REFERRED TO ON PAGES IV - 27 AND IV - 28 OF THE 15 MARCH 1958 AFEMD ADVANCED RECONNAISSANCE SYSTEM (WS 117L) DEVELOPMENT PIAN. IN THE PROPOSED SAC WS 117L PRELIMINARY OPERATIONAL PIAN SACOP 5-58, APRIL 1958 THIS SAME FACILITY IS PROPOSED TO BE LOCATED AT OFFUTT AFB NEBRASKA (REFERENCE PAR 14F (3) ON PAGE 24). IN ORDER THAT THE DEVELOPMENT PLAN SCHEDULE BE MAINTAINED THIS/FACILITY MUST BE STARTED IN DESIGN VERY SOON, ACCORDINGLY, ITS SITING MUST BE ACCOMPLISHED WITHOUT DELAY. REQUEST DECISION ON OFFUTT LOCATION OF THIS FACILITY AS PROPOSED IN SACOP 5-58 BE EXPEDITED.

DOWNGRADED AT 12 YEAR INTERVALS; NOT AUTOMATICALLY SSIFIED. DOD DIR 5200.10

. C. E. ODER, COLCNEL, USAF

13 1900

JUNE 58

MEDERIC C. E. DOKR

NAME:

26 June 1958

MANUFARDUM FOR COLONEL SHEPPARD, WDGO

Subjects Operating Agency for WS 117L

- I. For the following reasons, it is important that the WS 1171, operating agency be identified as soon as possible.
- a. User inputs of operational criteria are needed as a basis for design of technical facilities. Immediate examples are the WS 117L launchers and data acquisition station at Cooke.
- b. The using agency should act for the Air Force in securing rights for joint use of Tongue Point with the Coast Guard.
- c. Designation of the operating agency will determine the participation and hence the influence in site selection of the Central U.S. Data Acquisition Station and the Intelligence Septer.

WILLIAM E. LEONHARD

Colonel, USAF

Deputy Commander, Installations

District of the second second

DOWNGRAFTO OF THE FAR WALL

W 54

CONFIDENTIAL

Copy <u>33</u> of 60

WEAPON SYSTEM 117L PROGRAM STATUS REPORT
For Quarter Ending 30 June 1958

RCS AF-XDD-A2

DOWNGRADED AT 12 YEAR
MERVALS: MO? AND OMATICALLY
DECLASSIFIED. DUD DIR 5200.10

Prepared by
AIR FORCE BALLISTIC MISSILE DIVISION
HEADQUARTERS
AIR RESEARCH AND DEVELOPMENT COMMAND
United States Air Force
Post Office Box 262
Inglewood, California



CONFIDENTIAL

AIR FORCE RALLISTIC MISSILE DIVISION
HEADQUARTERS
AIR RESEARCH AND DEVELOPMENT COMMAND
United States Air Ferce
Post Office Box 262
Inglewood, California

WDPC

8 July 1958

· 🔅 · 🌣

WEAPON SISTEM 117L PROGRAM STATUS REPORT
Quarter Ending 30 June 1958
RCS AF-XID-A2

FOREWORD

This report summarizes the progress made in the Advanced Reconnaissance System program during the period 1 April through 30 June 1958.

B. K. SCHRIEVER
Metor General, USAF
Chamander

WDPG-58-21

CONSIDENTIAL



CONFIDENTIAL

WEAPON SYSTEM 117L PROGRAM STATUS REPORT For Quarter Ending 30 June 1958 RCS AF-XID-A2

I. BRIEF OF PROGRESS

Development of the THOR-boosted advanced reconnaissance system (ARS) vehicle scheduled for launch from Cooke Air Force Base late in 1958 was on schedule. System installation design milestones were achieved.

Reprogramming directives for THOR-boosted flights placed emphasis as a secondary objective upon collection of geophysical research data and development testing of a recoverable biosatellite capsule. The primary objective of flight testing the ARS vehicle and the ground-space communication network was unchanged. To obtain the new secondary objectives, the ARS vehicle was redesigned for lighter weight. A decision to change the fuel used for the main engines of the ARS vehicle to an unsymmetrical di-methyl energy fuel, permitted planning for use of larger psyloads in the ARS vehicle. It is planned to phase in the UDHH engine in the #5 flight test vehicle.

Twenty-two significant propulation test assembly cold flow tests were performed at the Santa Grus Test Base of the Lockheed Missile Systems Division. Besign of the sumiliary power subsystem for the first ARS flight was completed and drawings were released. Detailed integration designs were started for installation of subsystems for nuclear auxiliary power units into the ARS vehicle.

A breadboard model of the visual recommaissance subsystem for the ARS program was demonstrated at the Eastman Medak Laboratories on 2h April. Significant programs was made on both the interim Pioneer and the Pioneer Ferret equipment programs. A program to provide infrared radiation measurements was undertaken. High-altitude balloon flights to obtain infrared power ground measurements in the 2.7 micron region were successfully completed.

A contract was awarded to provide for design and implementation of the intelligence data handling subsystem for the ARS.

CONFIDENTIAL SEC. 58-21






WEAPON SISTEM 117L PROGRAM STATUS REPORT For Quarter Ending 30 June 1958 RCS AF-NID-A2

II. TOPICAL SUPPARY

2 - see hauras

A. GENERAL

- l. Both ATIAS and THOR missiles will be used in support of the Advanced Reconnaissance System (ARS) program. THOR-boosted ARS vehicles will be used in the early phase of the program primarily for engineering tests of the orbital capability of the vehicle. Early ATIAS—boosted ARS vehicles will also be used for engineering purposes but, unlike the THOR-boosted vehicles, will contain developmental reconnaissance equipment. The ATIAS-boosted vehicles will evolve into the operationally configured ARS.
- 2. Work on the first THOR-boosted ARS vehicle continued generally on schedule throughout this quarterly reporting period, and system installation design milestones were successfully achieved. This vehicle, due for completien in June, will be completed early in July. It will be launched from Cooke Air Force Base late in 1958. Following this initial flight, one THOR-boosted flight per month is tentatively scheduled through August 1959.
- 3. The first ATIAS-beested flight test of the ARS is scheduled for June 1959 from the Air Force Missile Test Center (AFMTC), Florida. After initial launchings from AFMTC, subsequent ATIAS-boosted flights will be transferred to Cooke Air Force Base. The first ATIAS-boosted flight from Cooke is tentatively scheduled for March 1960.
- 4. A captive test ARS vehicle for use in the ATLAS-booster test program is scheduled for completion in February 1959. This vehicle will be used for testing at the Lockheed captive test facilities, Santa Cruz, California.
- objective of THOR-boosted ARS flights. The secondary objective of these flights, which comprise the early Program IIA phase of the overall ARS program, originally emphasised Pioneer Visual recommaissance. The new directives shifted the emphasis as a secondary objective from a visual recommaissance application employing a recoverable film capsule to the collection of geophysical research data and the development testing of recoverable biosatellite capsule. Flight testing of the ARS basic vehicle system and the ground-space communication network remained the primary objective of the redirected program. Ten launches have been scheduled for this program. The first flight is planned for Nevember 1958. All launches will be made from Cooke Air Force Base, with the objectives of achieving a mission objective.




3

CONFIDENTIAL

18 C.



- 6. Formation of an Air Force Bicastronautics Division at Inglewood, California, was directed on 23 April. The Bioastronautics Division will function as a subsystem consultant and liaison group for all biomedical activity in the ARS program. In conjunction with Lockheed, Bioastronautics Division prepared a work statement dated lk May which will result in a contract to produce five biosatellite recovery capsules for ARS vehicles. These recovery capsules will permit the launch, orbit, and recovery of animal subjects. The animals will suffer no irreversible biolegical damage. Collection of biological and environmental data such as temperature, humidity, pressures, acceleration, cosmic radiation, weightlessness, psychological responses, etc., is planned. Mice, rats, and small primates will be used. The first launch of four mice is programmed for
 - 7. Two types of biosatellite payloads are contemplated for ARS flight tests; a recovery capsule to demonstrate the feasibility of the system by returning a living animal from orbit to earth, and a recovery capsule which will return a sub-human primate from orbit. Only environmental data will be collected in the early type capsule. Physiclogical data are also desired from the sub-human primate capsule.
 - 8. All five of the contemplated biosatellite flights will be launched south from Gooks Air Force Base. With the ground stations planned for the primary flight objectives of the program, it would be impractical to recover anywhere except over the Pacific Ocean. It is planned that sall biosatellites will make eighteen orbits with approximately a ninety-minute period prior to recovery. Re-entry trajectories will be initiated over Alaska, and recovery after re-entry will take place in the vicinity of Hawaii.
- 9. Studies have been conducted to establish the feasibility of "drag only" re-entry trajectory using ablation techniques to protect the basic structure and contents. Preliminary calculations have shown that this method is feasible for re-entry. After re-entry is completed, the capsule should decelerate to its subsonic terminal velocity at about 50,000 feet altitude. Below this altitude a reefed parachute will be used to accomplish further decelerations with low shock leadings, and touchdown on earth will be at about 20 feet per second.
- 10. Studies were initiated to determine the relative advantages of aerial, sea, or land recovery of biosatellites. Currently, indications favor aerial recovery at approximately 10,000 feet altitude by using a system already fully developed for the C-119. Over 1500 successful recoveries with the G-119 system indicate its serviceability for this application. To pimpoint the descending parachute capsule, silvering of the chute, ejection of chaff charges from the capsule, and a capsule Sarah beacon can be employed in conjunction with radar aircraft (RC-121 equipped with APS-20 search radars and Sarah beacon receivers). CHAFBENTAL



WDPC-58-21



11: "A study of system rellability has been underway." The II system reliability analysis includes reliability models for the system out and for each of the subsystems. Reliability allocations have been because a calculated for each of the subsystems. This Information is being prepared for distribution in a technical report. 17 A malfanction reporting preceding added to the art of the vehicles foreign with being reviewed at both betaliaron need and mill permit between alignment of the vehicle's center of presented according

- 12. The first meeting of the ARS Weapon System Phasing Group was held in May. Briefings were presented on the background and status of the over-all system, the various subsystems; and the content of the ARS preliminary Operational Plan. A Commissions and Electronics Subcommittee was established. This subcommittee was directed to investigate problems concerning frequency allocations to the ARS program, system and requirements dictating the extreme bandwidth in the ground point-to-point communication system, and any communication and electronic problem which could have bearing upon the ARS program.
- 13. The engineering analysis report for the Program III Pioneer Reconnaissance satellite has been completed and will be published by the Lockheed Aircraft Corporation as a formal engineering report.

В. SATELLITE AIRFRAME

...

- 1. To obtain Program IIA objectives of geophysical and biomedical research data, the ARS vehicle was redesigned for lighter weight. ARS vehicle and THOR-interface problems (such as booster payload capabilities, allowable loadings, separation dynamics, guidance and control) were mainly resolved. Extensive performance studies were conducted and nominal trajectories were calculated. Small scale (1/15) wind tunnel tests were completed with an ARS/THOR configuration and design for a substantial balance of the instrumentation required for the IIA program was accomplished.
- 2. Design of a facility checkout vehicle, formerly identified as propulsion test vehicle assembly #3, was completed. Structural design was completed for flight test vehicles numbers five through ten, and installation design is well underway.
- 3. A decision to change the fuel used for the main engines of the ARS vehicle from JPh/IRPNA to UDMH, a higher energy fuel, permits use of larger payloads in the ARS vehicle. . Imating
- as through the fundinging of win in the The decision to change to WMH fuel early in Program IIA flights necessitated some redesign of the vehicle and propellant tanks, in addition to changes in the rocket engine itself. Changes include and lengthened and modified forward mid-body for the vehicle; and a redesigned conical shell, connected fuel and oxidizer tanks, and rearrangement of plumbing for the propellant tanks. Design effort was initiated for a recoverable capsule under development by the General Riestric Company.

Delivera, a configure describing fately as Missile Systems Division.

DPC- U-CE



COi

It has been determined that a single belium boom extension would insure proper vehicle aerodynamic stabilization at the lower orbital altitudes assumed for early Program IIA flights; However, engineering effort continued on the twin-boom extension mechanism for the purpose of increasing the functional reliability of this mechanism. Small vanes or fins are being added to the aft of the vehicle for vertical stabilization. These additions will permit better alignment of the vehicle's center of pressure and center of gravity.

- 5. Problems previously, encountered in the welding of magnesium thorium alloys used for structure and skin are being eliminated as experience is gained. The elimination of these problems removes one of the possible delaying factors in the flight schedule.
- 6. Four segmented steel tanks were completed, and will be used as back-up for the aluminum tanks planned for flight test use. Three of these tanks failed when subjected to pressure tests. The fourth was modified and successfully passed pressure tests, but is slightly heavier than the desired weight.
- 7. With the cooperation of the Sandia Centrifuge Section, inertial loading tests were performed on the first spun aluminum flight tank and one segmented steel tank. Both passed the tests successfully. The aluminum tank, completed on 2h May, was pressure tested to 85 psi and then flown to Sandia. Exceptional cooperation was received from the Atomic . Energy Commission and Sandia on these tests.
- 8. A welding machine for assembling spun aluminum tanks was received by Lockheed, and training in its use is underway. Efforts are being made to reduce the number of manufacturing processes involved in producing the aluminum tanks. One result of these efforts is the elimination of the chem-mill process.
- 9. An early test on the helium regulator used for pressurizing propellant tanks indicated a technical problem area. However, tests on a second helium regulator produced by Robert-Shaw Fulton Company were satisfactory. Failure on the early test was attributed to faulty test procedure and metal chips found in the regulator assembly.
- 10. Despite the introduction of accelerated schedules and changes in Program IIA objectives from recovery of visual recommaissance to the geophysical and biomedical programs, the airframe subsystem maintained satisfactory design progress on Program I throughout the quarterly reporting period. An exploded view of the ARS vehicle mockup and the ATLAS adapter is shown in Figure 1.

G. SATELLITE PROPULSION SYSTEM

L. The two ABS rocket engines delivered by Bell Airgraft during the first quarter of 1958 were assigned to the Santa Crus Test Base of the Lockheed Missile Systems Division. The first ground test engine was mounted





IDPC-58-21

in the newly completed propulsion test assembly. The entire propulsion system (composed of pretotype components, except for boiler plate tanks) underwent hot firsing tests! The second engine was assigned for installation in propulsion test vehicle assembly flat three hot firsings were conducted on the pretotype system. The first firing was cut off by the ground safety equipment because of gas generator flame out due to faulty installation promodures. The second was successful and was shut down by command, after seven seconds. Engine performance was satisfactory. A third hot firing of 12 seconds duration also was successful. However, pump inlet pressures were greater than specified, and the cause is being investigated. Analysis of data from these firings is still in progress. Preliminary results indicate that objectives were obtained. The gimbal mounted engine is shown in Figure 2. The static firing test stands and the instrumentation blockhouse at the Santa Gras Test Base are shown in Figure 3.

- 2. Twenty-two significant propulsion test assembly (PTA) coldflow tests were performed to date at the Santa Crus Test Base. Testing revealed no difficulty with suction pressure during the starting transients. It was found that helium line pressure drops were higher than the calculated design figure and additional test instrumentation was installed to determine the cause of this discrepancy.
- 3. To increase Satellite-vehicle rocket-engine performance, an unsymmetrical di-methyl hydrazine/inhibited red fuming nitric acid (UDME/IRFNA) propellant combination will be introduced early in the flight test program to replace the JP-1/IRFNA combination planned for use in the initial THOR-boosted ARS flights. The first UDME engine, a modified JP-1/engine, has been tested. A satisfactory run of 17 seconds has been completed.

D. AUXILIARY POWER SUBSISTEM

- l. The design of the auxiliary power subsystem (APS) for the first ARS flight vehicle has been completed and all drawings have been released. An analysis of the electrical load requirements has been completed. Because of the number of battery units to be carried in Flight 1, the severly limited total life of the APS is estimated at 20 hours. The total Flight 1 battery capacity is limited to two silver peroxide sinc batteries (Type II) for a total weight of 52 pounds. The total installed auxiliary power subsystem weight for Flight 1 is 12h pounds.
- 2. Detailed integration designs were started for the installation of both SNAP I and SNAP II (subsystems for nuclear auxiliary power) into the ARS vehicle. Design sketches of the equipment beam were forwarded to subcontractors for coordination of the initial installation concept of the auxiliary power unit equipment. Detailed shield designs for both the SNAP I and SNAP II auxiliary power units also were initiated in connection with this detailed integration program. Development of ground-support equipment requirements and start procedures for the SNAP I program continued.

15-52-34 DE

17 le remera







Company for a supply of ARS vehicle investers and voltage regulators to be used on THOR-boosted flights, Modifications have been made to similar components for use on ATLAS-boosted flights a similar to make the similar components for use on ATLAS-boosted flights a similar to make the similar and the same of the similar and the same of the s

per present and the second

R. SATELLITE GUIDANCE AND CONTROL SYSTEM

l. A procurement plan for the production of a light-weight; allinertial guidance system for the ARS vehicle has been completed. The
guidance system is being developed by the Massachusetts Institute of Technology to guide the ARS vehicle into orbit and to stabilize its position
with reference to the earth while in orbit. The plan calls for the first
test flight of the production system using an ATLAS booster early in 1961.

units of the essential guidance and control hardware for the ARS/THOR combination. The equipment will include both the planned and the back-up inertial reference package.

SATELLITE RECONNAISSANCE DEVICES

VISUAL RECONNAISSANCE

- l. Activity in the interim visual reconnaissance program, the original objective of Program IIA, was terminated.
 - 2. A significant milestone was met with the successful demonstration, on schedule, of the breadboard model of the Pioneer Visual reconnaissance subsystem at the Eastman Kodak Company. The model included airborne equipment and equipment for recording data at the ground station. The airborne portion consisted of the camera, the processor, and the readout scanning mechanism operating in series. The ground portion was a separate unit with a complete readout device scanning simulated photography which was displayed on the ground reconstruction devices.
 - 3. The experimental model of the 36-inch focal length lens and collimator for testing were delivered in May to the Esstman Kodak entropy. This lens is planned for the advanced visual program. Preliminary tests indicate that design requirements of 100 lines/mm resolution have been met.

of the visual, recommensance payload mockup; is: illustrated in Figure had as to recommensance payload mockup; is: illustrated in Figure had as to recommensance payload mockup; is: illustrated in Figure had as to recommensance payload mockup; is: illustrated in Figure had as to recommensance payload mockup; is: illustrated in Figure had as to recommensance payload mockup; is: illustrated in Figure had as to recommensance payload mockup; is: illustrated in Figure had as to recommensance payload mockup; is: illustrated in the recommensance payload mockup; illustrated in the recommensance p

CONTREPTAL MADE

R

MDPC_58_27



ELECTRONIC PECONNATERANCE


- l. During June, the Soviet radar catalogue was revised to include the latest inputs from the intelligence community. A study on Soviet block telemetry was completed. The study incorporates a tabulation of currently available characteristics of Soviet telemetry systems.
- 2. Significant progress was made by the Airborne Instruments Laboratory, the electronic recommaissance subsystem centractor, on both the interim Pioneer and Pioneer Ferret equipment programs. Major sub-assemblies were designed and design criteria on the interim Pioneer subsystem were completed.

INFRARED RECONNAISSANCE

- l. The first successful measurements of infrared radiation from intercontinental ballistic missiles were made from B-17 aircraft during the flight of ATLAS 15A. These measurements were the first in a series to determine how an ICBM appears to a satellite-borne infrared scanner during the power and altitude stages of the missile trajectory. The infrared scanning system is being designed to give early warning of an enemy ICBM attack as well as other data.
- 2. Efforts to obtain infrared radiation measurements, halted temporarily by the emergency grounding of all B-h7 aircraft, were resumed late in June. The program provides for measuring radiation from all ICHMs to be launched at the Air Force Missile Test Center. Additional detailed information is being acquired from a similar measurement program which has already produced very successful results. This information indicates that infrared radiation from ICHMs may be much greater than previously estimated. Data from one ATIAS flight and one VANGUARD flight indicated that sensing equipment was saturated with infrared radiation at a range of 600 miles.
- 3. The series of high-altitude balloon flights planned for obtaining infrared-power ground measurements in the 2.7 migron region has been successfully completed, and a final report has been submitted. Preparations are underway for making additional flights to take measurements in the 3 to 5 micron regions of the spectrum. The infrared detector in these measurements will be the Eastman Kodak lead-selemide cell, cooled to dry-ice temperature. In carrying out the comprehensive program of evaluating all possible detectors for use in the ABS infrared subsystem, measurements have been completed on 12 unimmersed lead sulphide cells supplied by Electronic Corporation of America and 12 lead sulphide cells supplied by Infrared Industries Incorporated.

G. COMMUNICATIONS SYSTEM

L. Development of ground-space communications progressed, throughout this quarterly reporting period. Preliminary tests were completed on the S-band beacen and a preliminary communication plan for Program IIA was drawn up. Design for orbit antennas to be used for







telemetry and beacon in a vehicle with nose-down attitude were completed. Exit antennas were reduced in weight and voltage breakdown tests were conducted on different antennas.

- 2. Modifications of the SCR MOD II radars progressed rapidly. The sequence programmer breadboard for Program II, the Pioneer Visual recommaissance program, was completed and preliminary testing was started. A slippage of approximately six weeks resulted from changes in the command telemetry ranging system; however, no difficulty is anticipated in getting back on schedule. Ground command equipment is rapidly approaching the prepretotype stage. Satisfactory progress continues in the area of the wide band data link. A pre-prototype ground UHF receiver has been completed and tested. The use of printed circuitry techniques has resulted in considerable progress in development of the data link antenna switch. Computations were conducted to obtain data for predicting orbital paths of the vehicle in anticipation of the ground tracking operation, and for commanding initial call-down of the biosatellite recovery capsule operation. A report on the "Preliminary Estimates of Reliability on the Ground-Spaced Communication System" has been published.
- 3. Requirements for tracking and acquisition sites necessary for obtaining data from the THOR-boosted ARS vehicle launchings from Cooke Air Force Base have been established. A total of five tracking and acquisition stations will be required. One station will be provided at Cooke, and a down-range tracking station will be located in the vicinity of Oxnard, California. One of the remaining three stations will be located in Hawaii, and two will be in Alaska. One Alaska station will be in the Anchorage area; the other will be in the Sitka area.

4. Radio frequency allocations for data transmission have been granted for the THOR and ATIAS-boosted ARS programs.


H. DATA PROCESSING SUBSYSTEM

A contract with The Ramo-Wooldridge Corporation provides for the design and implementation of the intelligence data handling subsystem (Subsystem I). Major subcontracts were negotiated by R-W in this period with ITEK Corporation for the major optical assemblies and devices; Broadview Research Corporation for photo interpretation keys and equipment requirements; Systems Laboratories Corporation for geodetic calculations and applications; and Planning Research Corporation for application of their intelligence parameter work.

I. QUALITATIVE PERSONNEL REQUIREMENTS INFORMATION

The Qualitative Personnel Requirements Information (QPRI) program for ARS progressed satisfactorily. The initial QPRI Conference for the program was held at Palo Alto, California, on 3 June 1958. A QPRI report was published on 30 June by the Air Force and the Lockheed Missile Systems Division. The report is time-phased for an operational date of early 1961 for the Pioneer Visual and Pioneer Ferret subsystems, and is






concerned primarily with satellite requirements which can be defined at this time. A complete QPRI report will be distributed about 1 January 1959.

J. FACILITIES DATA

We were the


- 1. The south Cooks Air Force Base area was selected as the optimum location for conducting ARS launches. Air Staff approval was obtained to site two launchers and a blockhouse for the ARS program in that area, subject to conformance with the Navy master plan. Naval authorities at Point Mugu agreed to site the facility as presented by the Air Force. Launch facility design criteria were reviewed in June.
- 2. Design criteria for the ATLAS-booster launch complex at Cooke Air Force Base have been submitted. Architect-engineer contract award is scheduled for early in July 1958. An architect-engineer contract for design of the missile assembly building will be awarded in July. Modification of existing buildings to provide an interim assembly facility started on 3 June and is scheduled for completion in mid-August 1958. Construction of launch stands and blockhouses for the THOR-booster launch complex at Cooke progressed on schedule. Modification of existing buildings for an interim missile assembly facility began in June. Modifications to assembly building E at the Air Force Missile Test Center, Florida, are scheduled for completion in September 1958.
- 3. Construction drawings and specifications for an interim tracking and telemetry station at Cooke have been completed. Construction will be completed by 15 August and equipment will be installed by 1 November. Design of the entire station has been initiated and is scheduled for completion in September 1958.
- 4. Design criteria for the ARS intelligence interpretation and dissemination facility were completed and made available for review during June. This facility will serve as the program control center, as the collection center for all reconnaissance data obtained from the data acquisition stations, and as the training center. Construction is scheduled to start in December 1958. The facility is expected to be ready for use by the need date, March 1960. The location for the Central Intelligence Center is unresolved.
- 5. The site survey team recommended Fort Stevens, Oregon, for the site of the northwest United States tracking and data acquisition station. Electronic surveys indicated the suitability of the area for ARS operations. Site Selection Board approval was obtained and recommendations for the area have been approved by Headquarters, USAF. Design criteria for this station is being reviewed and a contract for architect-engineer services for the design will be awarded early in July.
- 6. Electronic surveys of proposed locations for the northeast U. S. tracking and data acquisition site were completed on 31 May. At the meeting of the Site Selection Board on 9 June Sampson Air Force Base, New York, was selected as the first choice for the northeast site. Permission






to survey Sampson Air Force Base was denied, however, and an electronic survey team was directed to make additional surveys of possible sites. It was decided to electronically survey the Veterans Administration property at Togus, Maine, and the New Boston Range, New Hampshire, as possible locations. The Board is scheduled to meet again on 7 July to decide upon a firm site. Ottumes, Iowa, and Fort Crowder, Missouri, were selected for possible use as the Central U. S. tracking and data acquisition station. These surveys will start on 7 July.

- 7. Construction drawings and specifications have been completed and released for construction of the interim tracking and data acquisition station at Kaena Point on the Island of Oahu, Hawaii. A construction contract was awarded in May. Beneficial occupancy date is 15 August, and installation of equipment will begin at that time. The need date is November 1958. Design of the complete station will be completed by 1 September. Access road construction is complete. Need date for the complete station is 1 October 1959.
- 8. An existing aircraft control and warning station at Cape Chiniak, Kodiak Island, Alaska will be used as an auxiliary test tracking station. This arrangement will eliminate the need for construction of new facilities in that area.
- 9. A construction contract for the auxiliary test tracking station at Annette Island, Alaska, will be awarded in July. Completion is scheduled for mid-August. Need date for this facility is 1 November 1958.
- 10. A facility to house laboratory equipment and instrumentation for analysis of technical information will be built at Wright-Patterson Air Force Base. Criteria for the facility, which will be needed by March 1960, has been developed.









ADVANCED RECONNAISSANCE SYSTEM

GLOSSARY

PROGRAMS

Program II ATIAS-boosted Engineering Prototype Test

Program IIA Engineering Test and Ricmedical Program

Program III Pioneer Visual Reconnaissance Program

Program IVI Pioneer Electronic Reconnaissance Program

Program IVI Advanced Visual Reconnaissance Program

Program VI Advanced Electronic Reconnaissance Program

Program VI Visual Surveillance Program

Program VII Infrared Surveillance Program

Program VIII Electronic Surveillance Program

PROPULSION

Booster ATIAS and THOR Missiles

ARS XIR81-Be-3 15,150-lb thrust engine; pump-fed; 263 lb sec/lb vacuum specific impulse; JP-4/IRFNA

XIR81-Be-5 15,150-lb thrust engine; pump-fed; 277 lb sec/lb vacuum specific impulse; UDMH/IRFMA



Exploded view of the WS-117L vehicle mockup and ATLAS adapter showing from front to rear:
(A) Nose cone with detachable nose cap (B) Midbody with forward and aft equipment racks
(C) ATLAS adapter section (D) Un-installed, spherically nested fuel and acid tanks for the vehicle. Figure 1.

(WDPC-58-21)

-CONFIDENTIAL



Figure 2. Final stage, gimbal-mounted engine.

CONFIDENTIAL

(WDPC-58-21)

÷.

Static firing test stands and instrumentation blockhouse at the Lockheed Missile Systems Division, Santa Cruz Test Base. Figure 3.

(WDPC-58-21)

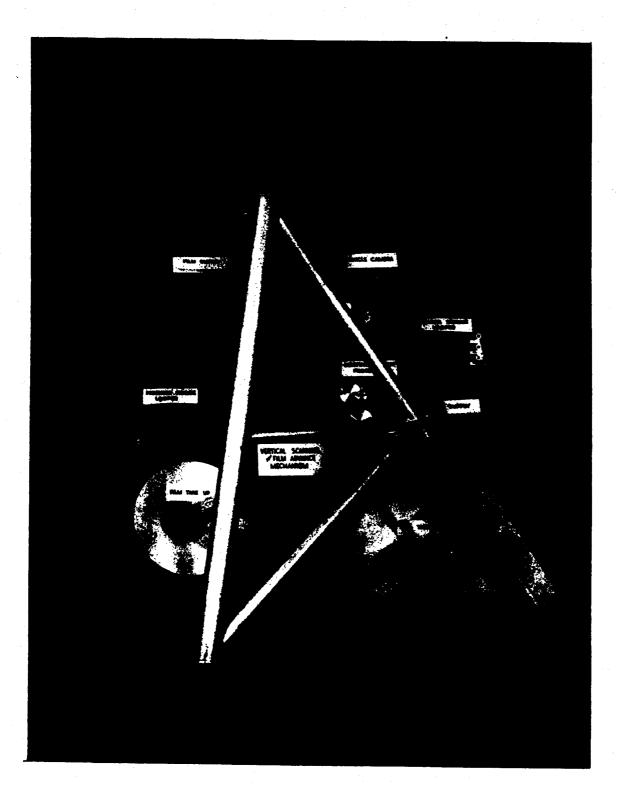


Figure 4. Visual reconnaissance payload mockup.

(WDPC-58-21)

CONFIDENTIAL

59

()

SECRET

DISTRIBUTION

Headquarters, United States Air Force	10
Commander, Air Research and Development Command	15
Commander-in-Chief, Strategic Air Command	~~~
Commander, Air Training Command	í
Army Ballistic Missile Agency	2
Ballistic Missiles Office (Hq AMC)	3
Assistant CINCSAC (SAC MIKE)	3
Air Force Ballistic Missile Division (Ho ARDC)	17

COMER AFFIND INCLUSION CALLY BO UBAT WASH D C T CHICKNAL MEDIAGE MULTIPLE ADDRES **□** 788 REFERS TO MESSAGE: CLASSIFICATION IMPO: (SECRET) FROM WDGO-6-4 ACTION FOR AFCOM COL KRIBGER AND INFO FOR AFOIE GEN RENTZ. RECURNING WOTER 6-17-E, DATED 13 JUNE, WHICH REQUESTED DECISION RE SITING INTELLIGENCE CENTER FOR WS-117L. THERE ARE CURRENT PROPOSALS RELATIVE TO USE OF SATELLITES FOR COMMUNICATIONS, WEATHER, ANTI-BALLISTIC MISSILE BARLY WARNING, AND OTHER PURPOSES. THE PROBABILITY IS HIGH THAT THESE OR SIMILAR PROPOSALS WILL BE ACCEPTED. THE COMMUNICATIONS NET AND ORGANIZATIONAL PROVISIONS FOR THESE WILL OVERLAP AND BE SIMILAR IN MATURE AND EXTENT TO THOSE REQUIRED FOR INTELLIGENCE PURPOSES. THE WS-117L SYSTEM IS THE ONLY SATELLITE PROGRAM WITH HARDWARE OF SUBSTANTIAL SIZE BEING INTEGRATED INTO A FULLY OPERATIONAL CAPABILITY, HENCE THE SO-CALLED "INTELLIGENCE CENTER" WILL FOR SEVERAL YEARS BE UNESCAPABLY THE HUB OF ANY MAJOR SATELLITE OPERATING EFFORT (AS CONTRASTED TO RAD). AFEMD THEREFORE RECOMMENDS THAT A FULL-SCALE SITE SELECTION FOR THIS FACILITY BE SEPARATELY ACCOMPLISHED BY THE PRESENTLY CONSTITUTED WS-117L SITE SELECTION BOARD AND REQUESTS THAT WE BE SO DIRECTED. IDPORTANT RESERVES OF THE CRITERIA FURNISHED SHOULD INCLUDE THE PROBABILITY OF A SUBSTANTIAL FACILITY DOWNGRADED AT 12 YEAR INTERVALC: Qol Shepperd

JOINT MESSAGEFORM - CON MUNICIPAL

CONFIDENTIAL

COMER AFFIND INCLUSION CALLY

Jun 2 102 47 58

AND THE RELATED COMMENTCATIONS MAY PROPERTING

Ŋ

WDGO:

__

MR (PAGE

- ...

TEM

2 July 1958

MEMORANDUM FOR THE RECORD

DOWNGRADED AT 12 YEAR INTERVALS, NOT AUTOMATICALLY DECLARATIED. DOD DIR 5200.10

SUBJECT: Operational Planning for WS-117L

In a meeting attended by General Schriever, General Ritland, Colonel Terhune, Colonel Sheppard, Colonel Evans, Celonel Oder, and Lt Colonel Boatman, 1000 hours, 2 July 1958, the following actions were directed:

a. A letter will be sent to AFCGM which will furnish an AFBMD draft of the ARS Preliminary Operational Concept. This will be the same as that published by Hq USAF except that it will generalize on the defimition of the hardware involved in lieu of the specific definitions in the Hq USAF version. The letter will advise that AFBMD is developing a Data Utilization Plan (DUP) for the R&D flights of WS-117L which will be submitted no later than the next revision of the WS-117L Development

b. A team under WDT will be formed without delay to evolve the DUP. The DUP will be responsive to the AFBMD POC, particularly paragraph III B 1.

- c. The DUP will be submitted as the Operational Annex to the next WS-117L Development Plan Submission.
- d. SAC will be held responsible for submitting and supporting their hardware and facilities requirements for operational use of WS-117L and coordinating these requirements with AFBMD. The problem of establishing a schedule for such operations will be between CINCSAC and Hq USAF. The manner by which SAC's requirements will be programmed (AFBMD Development Plan vs normal SAC channels) will be determined after these requirements have been reviewed.
- e. The team referred to under paragraph b, above, will also develop a National Operational Concept for WS-117L. This Concept will be more broad and inclusive than the present POC. The Concept and the fact it is under preparation will be closely held within AFBMD. 21 Secros,

Major General, USAF Commander

Date: 10 Jul 58

GORY & ENCRYPTION PHYSICALLY REMOVE ALL INTERNAL GOLD ERENCES BY DATE-TIME GROUP PRIOR TO DECLASSIFICATIVE NO UNCLASSIFIED REFERENCE IF DATE-TIME GROUP IS QUC

> FROM REQUIRED EXCEPT FROM SUCRYPTION PHYSICALLY PE SOME ALL INTERDIAL REFERENCES BY DATE-TIME

SHOUP PRIOR TO DECLASSIFICATIONS"

PP INCL 2382 DE RIVERT IF P R 102050Z IM CH HQ WEAF WASH D C TO CONDR AFBIND INCLEVOOD CALIF INTO CINCEAC OFFUTT AFB

PATED 13 JUNE 1956 AND VDCO-G-4 DATED 2 JULY 1956. THAT PORTION OF THE RAGOP 5-36 TRAT LOCATES THE US, 117L DATA PROCESSING FACILITY AT OFFUTT AFB IS APPROVED. REQUEST THAT THE LOCATION OF TRAT FACILITY BE PLACED ON THE ACENDA OF THE WE 1171 SITE SELECTION BOARD HEETING SCHEDULED FOR

THE AC MEG TE/OCSCZ JUL RJWZNT

VINICENCED AT 12 YEAR LUS MILESTY CASSIFIED. DOD DIR 5200.10

CONFIDENTIAL



DOWNGRADED AT 3 YEAR INTERVALS: DECLASSIFIED AFTER 12 YEARS. DOD DIR 5200.10

15 JUL 1958

WDISR

SUBJECT: (UNCLASSIFIED) Preliminary Operational Concept WS 117L

TO:

Chief of Staff Headquarters USAP

ATTN: Assistant Chief of Staff for Guided Missiles

Washington 25, D. C.

1. The inclosed Preliminary Operational Concept (POC) for WS 117L prepared by this Division is forwarded for your consideration. While closely similar to the POC for W3 117L published by Eq USAF, it uses less restrictive description of the equipment to be employed.

- 2. The Air Force Ballistic Missile Division has under preparation a Data Utilization Plan which will be responsive to those aspects of the Weapon System Program which are an ARDC function under the POC. The plan will maximize the utilization of reconnaissance data acquired during the period when flights are made
- 3. It is our purpose to submit the completed Data Utilization Plan as soon as possible, not later than the next submission of the WS 117L Development Plan.

1 Incl:

3 Cys(1,2 & 3) POC for W3 117L (SECRET) 22 pgs ea cy WDTSR 58-354 and Multilith Masters

SIGNED

O. J. RITLAND Brig. Gen., USAF Vice Commander

DUWINGIUNG DECLASSIFIÉD AFTER 12 YEARS. DOD DIR 5200.10

DOWNGRADED A DECLASSINED DOC DIR


WDISR

ah (9 Jul 58)

Col Oler

WDISR 58

JOINT MESSAGE AND DENTIAL



APAGE BELOW REMERTED FOR COMMUNICATION CENTER

	PRECEDENCE	TV	1 1400					
ACTION		BOOK	Mee (ACCOUNTING SYMBOL	ORIG. OR REPE	t\$ 70	CLASSIFICAT OF REFEREN
INFO			MULTI	STHELE	!			OF REFEREN
ROM:	unimarca is one							
	(Alleg)		r. eé			- 100 miles		MALC
			· . · · · ·		•			J. Marian
):						OWNGRADED OWNGRADED ERVALS: NOT CLASSIFIED. D	T 1200	11CALL
	CARE SELECTION D.C.	• .				MICRADE	OTO, A	5200.10
					0	DALLACT LACK	ODIK	•
PO; _	CONTRACT AND ADDRESS AND				اكلم	RVALS, D	9-1	
	***	—			114.	LASSITIE	ł	
					DE		1	
							- 1	
	Fig. 1000 7-05-9		_				ı	
	7-45-2.		B-IX.	I	Marie 1	T TOUR		
				_		- 4000		
	MANAGE TO SELECT MANAGEMENT	3 16 AM	秀.	-	IS IN ACC		.	
-							1	
	A PARTICIPATION AND ADDRESS OF THE PARTIES AND A			MEA D	DOCUMENT !			
						THE R.		
	ETTER ANDERES MAN							
•					A PRICE OF			
	THE PERSON NAMED IN	in terms						
		n mark	· A		Mark Page	DESCRIPTION OF THE PARTY OF THE	_	
-	THE PER PERSON						7	
	THE PER PERSON		II I		Editor >	All seconds		
	MANAGEM OF THE PARTY.							
	THE RESERVE OF THE PERSON.		23 1					
						de Liedalli.	j	
-							1	
		``			orașa. II	ALC: UNITED BY	.	
1	, TAKELETTE OR OTHER	R PROPERTY		<u> </u>			1	
							1	
							1	
					10 , 13 12		1	
							ł	
				30 21	I Maria		1	
							l	
1.00	MO			27			j	
HT F	MO				-34	Wednesday.	l .	
·	THE PARTY NAMED IN		3 1 1 2	de			-	
	The second secon			V-1-1-1	es in 1717		DATE	TIME
7								
				أنا هيد	as mile il	36 750	MONEY	YEAR .
		4 1	HY R			·		1
	4 P	- Continued	era bi					
MA	ME AND THE SECOND	<u> </u>	1	1/5/	70 TV	+	, AL	1958
20	ME AND TITLE Signature, if Topic	red)		TYPED		26/10/2		
حجا					· 	E AND TITLE		
	**	A PAGE	≴	1				•
RITY	CLA	7 7 74629		I				
الاستان			2 1	1	OORICH	CRITIAT		
				ļ	 	DENTIAL		
200			j	I				

ल्लाक्स स्ट्राइट स्ट भ्रवभू त्रवाबद्द १०० भार । इर्रोभू है

the second of the second secon THE CHARLEST WAS LIMED TO THE PROPERTY WITH

ensemble than the contraction is the contraction to the fact of

Communications of the A CONTRACTOR SUPPLIES CONTRACTOR OF THE SUPPLIES OF THE SUPPLI

्राप्तिक स्थापना स्थापना क्षेत्र के स्थापना क्षेत्र के स्थापना क्षेत्र के स्थापना क्षेत्र के स्थापना क्षेत्र क स्थापना स्थापन

the way tier to be a better to be against the configuration of the confi

Commence of the contract of th

THE CALL STATE OF THE PARTY OF THE PARTY OF THE PROPERTY OF THE PROPERTY OF THE PARTY OF THE PAR

CONFIDENTIAL

The second of th

The second of th

强烈, 大海

he free transmission a social motor of in with and enabled to the section and the section of the secti the recently realistic properties and with entrance by Continue said and the first training the state of the season of the state of the state of the season of the s the state of the s THE LEADING THE

化企业设置 有限的特殊的现在分词的现在分词 化工程设置 the entire of the property of the first of the second of t some constitution of the second of the second of

THE PROPERTY OF THE PROPERTY OF THE PARTY OF

(1/1/1/30)

1500 有1500 (1500) 1500 (1500) 1500 (1500) 1500 (1500) 1500 (1500) 1500 (1500) 1500 (1500) 1500 (1500)

on second in the section of the sect

经存在 经经济的

Company of the same of the sam or in Jatha Ciles . Some Otta Craner saton

CONTROL OF THE SON OF THE CONTROL OF THE CONTROL

A CONTRACT OF THE CALL OF THE

The state of the s

To avoid re ficting first decisions within each to space sovereign the initial organisation and operational concept should not emphasise the military applications but should be evolved in terms of a system operated by the military as a service to others as well as itself.


In the same general tone it would be desirable to rename the 117L.

It might be referred to as the American Space Observatory and launched as an extension of the ICY.

Operation by the military is logical in that only the military has the resources, erganizational pattern and experience necessary to support such an effort. A case in point is the Antartic expedition where scientists are gathering data, but only as the result of a major U.S. Navy effort, assisted by the Air Force. In turn, operation by the Air Force is dictated by virtue of the most experience and greatest empablility in this field. The Air Force has an established production and R&D base, enormous investments in the required test and test support facilities and the trained personnel.

It is recommended that the Air Force create a service organisation which will:

- 1. Fully and expeditiously exploit the present and future potential of the 117L system.
 - 2. Provide flexibility for future U. S. positions on space sowereignty.
- 3. Not be subordinated to an organisation having an overpowering singularity of purpose and application of resources.

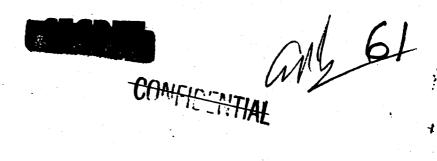

WEAPON SYSTEM 117L PROGRAM STATUS REPORT

For Month Ending 31 July 1958

RCS DD-SD(M) 242


Prepared by
AIR FORCE BALLISTIC MISSIE DIVISION
HEADQUARTERS
AIR RESEARCH AND DEVELOPMENT COMMAND
United States Air Force
Post Office Box 262
Inglewood, California

DOWNGRADED AT 12 YEAR INTERVALS: NOT AUTOMATICALLY DECLASSIFIED. DOUBLING 5200.10

CONFIDENTIAL

WPC-58-24 Copy ____of 125





AIR FORCE BALLISTIC MISSILE DIVISION
HEADQUARTERS
AIR HESEARCH AND DEVELOPMENT COMMAND
United States Air Force
Post Office Box 262
Inglewood, California

WDPC

8 August 1958

WEAPON SYSTEM 117L PROGRAM STATUS REPORT For Month Ending 31 July 1958 RCS DD-SD(M) 242


FOREWORD


This is the fourth report to ARPA on the activities in the Weapon System 1171 program. The report summarises program progress: during the month of July and will be consolidated with August and September information for inclusion in a formal quarterly report as of 30 September.

The SENTRY program has progressed satisfactorily and is on schedule.

B. X. SCHRIEVER Major General, USAF

Commander





Commence

ŀ

WEAPON SYSTEM 117L PROGRAM STATUS REPORT For Month Ending 31 July 1958 RCS ID-SD(M) 242

I. BRIEF OF PROGRESS

Flight test objectives have been determined for each of the ten engineering and biomedical test vehicles which comprise Program IIA. There are presently nine different programs planned in the SENTRY development. The ten SENTRY vehicles of Program IIA will have orbits between 160 and 240 statute miles.

The first THOR-boosted SENTRY test vehicle was moved from manufacturing to checkout and modification at Lockheed Missile Systems Division. It is to be moved to the Santa Crus, California test site on 27 August on schedule.


Development of all subsystems is proceeding on schedule.

Construction is proceeding as planned on the tracking and telemetry stations at Cooke Air Force Base, California; Kaena Point, Oahu, Hawaii; and Annette Island, Alaska. Initial occupancy at these sites is scheduled for 15 August.

Fort Stevens, Tongue Point, Oregon, has been approved as the Northwest tracking site. Recommendations have been made to use a bombing range near Grenier Air Force Base, New Hampshire, for the Northeast site and the deactivated Naval Air Station at Ottumwa, Iowa, for the Central site.

CONFIDENTIAL

ł



WEAPON SISTEM 117L PROGRAM STATUS REPORT For Month Ending 31 July 1958 RCS ID-SD(M) 242

II. TOPICAL SUPPLARY

A. FLIGHT TEST PROGRAM

1. Flight test objectives for Program IIA flights (see Glossary) have been determined as follows:

Flight No.	Orbit Altitude (Statute Miles)	Flight Objectives
1	225	Engineering Tests
2	190	Engineering Tests
3-4	145	Biomedical Experiments
5-7-9	240	Engineering Tests
6-8-10	160	Biomedical Experiments

- 2. The detailed test plan for the first SENTRY flight vehicle is being prepared. Flight test objectives for Program I (see Glossary) have been published. System test objectives for Program II are being developed.
- 3. The first THOR-boosted flight test vehicle entered the modification and checkout division of Lockheed Missile Systems Division on 11 July. This was 5 days later than scheduled; however, the modification and checkout schedule has been stepped-up to allow shipment of the vehicle to the Santa Cruz, California test base on 27 August as originally planned.

B. SATELLITE AIRFRAME SUBSYSTEM

- 1. Final design of the first two flight SENTRY vehicles has been completed.
- 2. The completion of the flight test objectives plan for Program IIA, noted above, permits equipment installation design to proceed on the remaining SENTRY/THOR vehicles.
- 3. In the propellant tank program, the spun aluminum tanks were successfully pressure tested. They were then installed in propulsion test vehicle assemblies #1 and #2 and in flight test vehicles #1 and #2. See Figures 1 through 6.







C. SATELLITE PROPULSION SYSTEM

The engines for flight test vehicles 1 and 2 have been delivered by Bell Aircraft to the Lockheed Missile Systems Division. One of these engines has successfully undergone five hot firings since delivery.

D. AUXILIARY POWER SUBSYSTEM

- 1. All components for the auxiliary power subsystem of the first SENTRI/THOR flight vehicle have been received by Lockheed. Acceptance testing is in progress.
- 2. Program IIA flights with THOR boosters will include test of a small solar battery. The battery will have an output of 1.10 watts. It is expected to be available for THOR-boosted flight #3, scheduled in June, 1959. Until this system is available for use, the psyload equipment installed in the SENTRY will be powered by a nine pound mercuric oxide-zinc battery. The battery will give the equipment an operating life of about 30 days.
- 3. Development of the SENTRY/ATIAS primary battery package is now completed, and qualification testing has begun.
- 4. Plans for the SENTRY/ATTAS solar battery tests in Program I are proceeding satisfactorily.

E. BIOMEDICAL SUBSYSTEM

- 1. During July a contract was let for ground support animal vans to support the biomedical tests planned in Program IIA.
- 2. Plans were completed for the bio-package assembly for SENTRY flights #3 and #4. Larger bio-packs for small animals are planned for SENTRY flights #6, #8, and #10 on which the engine using a higher energy fuel (UDMH) will be available.

F. FACILITIES AND SITES

1. Launch Facilities

- a. Ralph M. Parsons Company has been selected as architect-engineer for design of the Cooke Air Force Base launch complex. Welton Becket and Associates have been selected for design of the assembly building.
- b. Formal approval has been given for siting the SENTRY launch facility in the Point Arguello portion of the Pacific Missile Test Range located south of Gooke Air Force Base.

CONFIDENTIAL

4


2. Tracking, Control Telemetry and Data Acquisition Facilities

- a. Construction of interim tracking and telemetry facilities at Cooke Air Force Base is on schedule. Initial occupancy is planned for 15 August. Design of the permanent tracking facility, except for the data acquisition and processing building, has been completed. Design of the latter will be completed by 15 September.
- b. Construction of interim tracking and telemetry facilities at the Hawaii site is on schedule, and initial occupancy is programmed for 15 August. Design of permanent facilities has been completed, and construction will begin in August. See Figures 7 and 8.
- Island, Alaska, began in July. The contract was let on 3 July. Initial occupancy is scheduled for 15 August.
- d. Use of Fort Stevens, Tongue Point, Oregon, for the Northwest tracking and acquisition station has been approved by Headquarters USAF. Design criteria have been approved, and the architect-engineer selected. Design will commence in August.
- Base, New Hampshire, has been recommended as the site for the Northeast development and operational tracking station. Request for approval of this site will be forwarded by the Air Force Ballistic Missile Division to Headquarters USAF in August.
- f. The deactivated Naval Air Station at Ottumma, Iowa, has been recommended by the Site Selection Board as the site for the Central development and operational tracking station. Approval will be requested in August.

3. Communications and Logistic Support

- a. The administrative and data communications system interconnecting the seven SENTRY R&D sites is being installed by commercial communication contractors.
- b. The Chiniak, Alaska, AC&W station has been reactivated by the Alaskan Air Command to support the SENTRY program. Logistic support for the other SENTRY stations is a combined Air Force-contractor effort.
- c. At present, all communication and logistic support schedules are in consonance with the SENTRY flight test schedule.

5





G. OPERATIONS AND PLANS

Publication of a SENTRY Development/Operational Data Summary is expected by about 15 August. The purpose of this document is to furnish Lockheed Missile Systems Division with operational concepts to assist them in preparing qualitative personnel requirements information (QPRI). The QPRI will assist the Strategic Air Command in determining specific manpower for SENTRY operations.

H. MANPOWER AND ORGANIZATION

Initial estimates of manpower and organisation requirements for the SENTRY program have been submitted to the Strategic Air Command with the recommendation they be included in appropriate program documents. The estimates are based upon Lockheed submissions and requirements outlined in the SENTRY Preliminary Operational Plan (SACOP 5-58).





ADVANCED RECONNAISSANCE SYSTEM

GLOSSARY

PROGRAMS

Program I ATIAS-boosted Engineering Prototype Test

Program IIIA Engineering Test and Riomedical Program

Program II. Pioneer Visual Recommaissance Program

Program III Pioneer Electronic Recommaissance Program

Advanced Visual Reconnaissance Program Program IV

Advanced Electronic Reconnaissance Program Program V

Program VI Visual Surveillance Program

Program VII Infrared Surveillance Program

Program VIII Electronic Surveillance Program

PROPULSTON

Booster ATLAS and THOR Missiles

ARS XLR81-Be-3 15,150-lb thrust engine; pump-fed; 263 lb sec/lb vacuum specific impulse;

JP-4/IRFNA

XIR81-Be-5 15,150-lb thrust engine; pump-fed;

277 lb sec/lb vacuum specific impulse;

UDMH/IRFNA



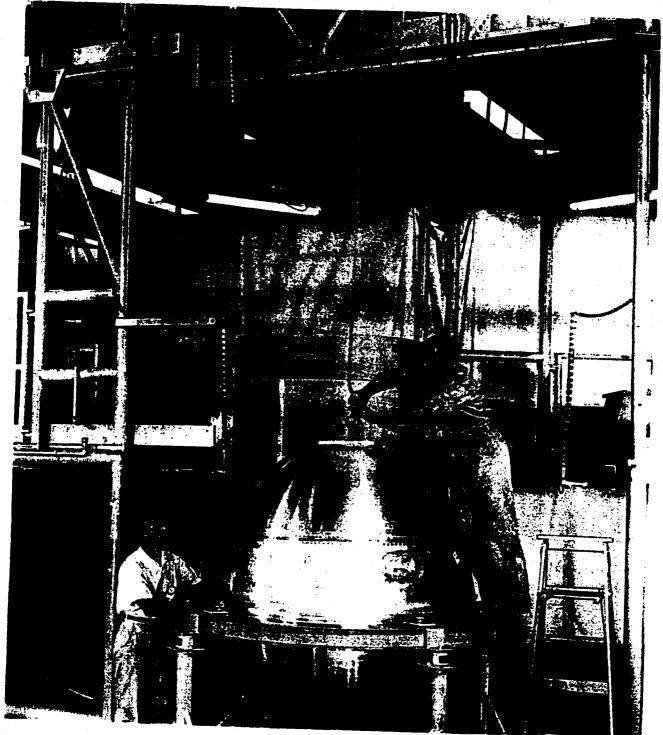


Figure 1. Propellant tank installation, mating of mid-body sections and alignment of vehicle airframe sections of the Sentry Vehicle are depicted in Figures 1 through 6. The spun aluminum fuel tank is shown here being prepared for installation in the aft-body section

(WDPC-58-24)

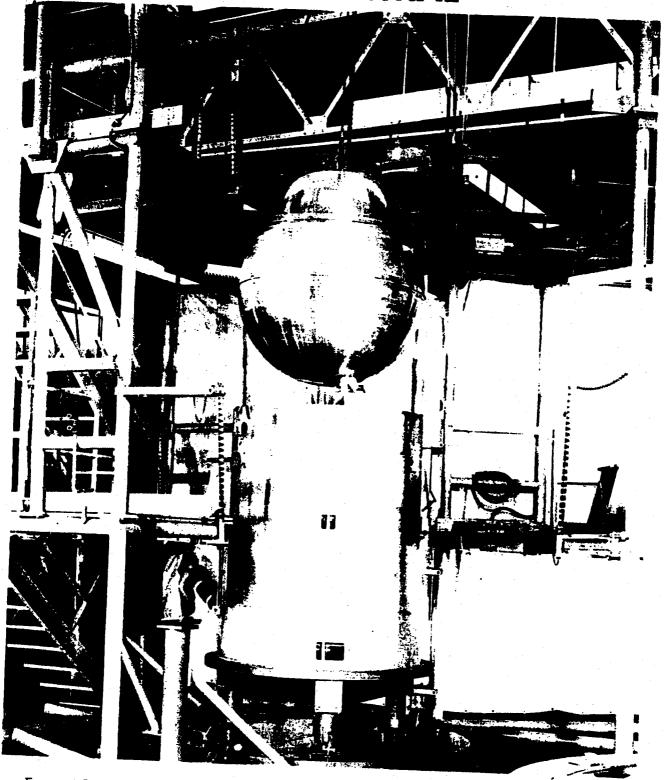


Figure 2. Installation of the span aluminum propellant tanks in the aft-body section of the Sentry.

(WDPC-58-24)



Figure 3. Stacking of forward mid-body sections, prior to mating with the aft-body section. (WDPC-58-24)



Figure 4. Mating of the forward mid-body sections with the aft-body section.
(WDPC-58-24)



Figure 5. Aligning vehicle airframe sections.

(WDPC-58-24)

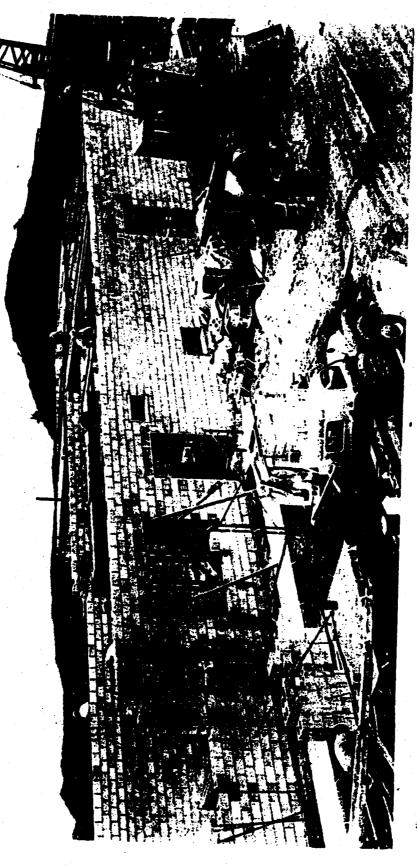


Figure 6. Airframe sections of the first flight article assembled.
(WDPC-58-24)



Construction progress at the Sentry tracking station Kacna Point, Oahu, Hawaii. Figure 7.

(WDPC-58-24)



Overall view of administration outlang construction at Kaena Point, Oahu, Hawaii, Inis facility will be part of the instrumented tracking station that will monitor the flight of the (WDPC-58-24) Sentry advanced reconnaissance system, Figure 8.

SECTET General Ritland
CONFIDENTIAL 62

The

6 Anunct 1952

Party for Coloniel Curtin

BINET: VS-1371. No.D operations at Suche Air Force Base

1. Natur are Moved thomp which require further attention n cottor that appropriate planeing and programming actions can be then. You are directed to establish so all has Task Group under p supreviolen of the 1272 program director, having suprecentation from \$160, SAG-MEER, WIR, and the Sid-65 Program Office, to study and recommend a course of action with respect to those those not inter then 15 August.

a. The question of using EAG straws to supervise the becater phase of the leasth sporation during RhD flights.

> NOTE: General Funk, General Large, and the underalgord have substantially agreed that this should be contractor spareted with over the shoulder training permitted for SAC military

b. Ketablish a date for initiation of operational Slights nationace. All factors such as the test program, training, availability of facilities, etc., should be considered.

c. Launch and guidance facility requirements to accommowithnesses Mid operational Sights. Intelled consideration thould be given to the utilization of Complex 65-2 for operational fligh and use of the GE Med-2 guidance for both operational and R&D Alghon.

d. Riki building requirements to accommedate receipt and check-out operations for both Rh.D and operational flight articles.


4. Bulliannes the suppossibilities which each of the lettering s will have be suggested at \$17% optivations.

(3) Front Minuito Division

× (8) Contracture, i.e., Convole, Lackbood, etc.

CH ANGE

DOWNCRADED AT 12 YEAR en lemmes, not automatically CECLASSIFIED. DOD DIR 5200.10



WDG-58-59




(6) Paritie Maulie Range.

he constituting this from it must be assumed that additional Air Force Mail activities will be constated from Conto and Arguello in the inconstation fature. These will be limited to projects for which AFMTS in manifolds.




B. A. SCHRIHYER Major General, USAF Commander

General Funk - BMO General Large - SAC/MSK.E Colonit Lesshard - WM



CONFIDENTIAL WDG-58-59



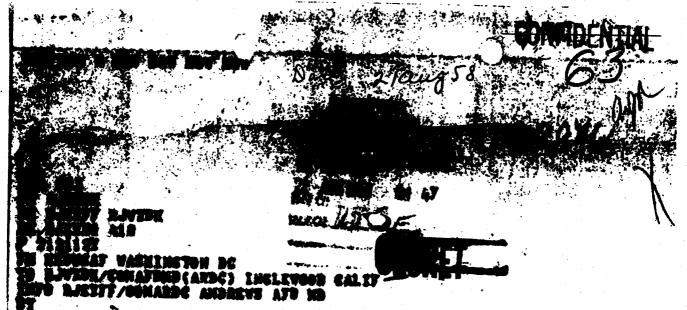


THE AFTER GREY, ATTENTION: COLONEL ODER, THIS CONTINUE CONVERSATION LAW SE AT AFTER HE AND TEL/CON 19 AND 38 PETYPER COL ODER, AFTER HE SELECTION OF THE AFTER AFTER AFTER AFTER AFTER AFTER A CONFROMENTAL AFTER AFTER

ũ DSM C C -58. 2250 €

DOWNGRADED AT 12 YEAR INTERVALS; NOT AUTOMATICALLY DECLASSIFIED. DOD DIR 5200.10



DESCRIPTION TO



EDERALLY TO THE POLLOVING CHINE LINES:

PARK THE LIEUM ALE

INVESTIGATION ASSESSMENT PRODUCTION STATUS AND PYTHER SENERALS OF

INVESTIGATION OFFICE VALUE VALUE STATUS AND PYTHER SENERALS OF

INVESTIGATION OFFICE VALUE VALUE STATUS FOR PROCESSING INFORMATION

INVESTIGATION OF PLANSED READS FOR PROCESSING INFORMATION

INVESTIGATION OF PLANSED READS FOR PROCESSING INFORMATION

INVESTIGATION AND ANY AND MARY

INVESTIGATION OF PLANSED READS AND ANY AND MARY.

INVESTIGATION OF ANY AND MARY

INVESTIGATION OF ANY AND MARY.

MATERIAL AND PARTY.

TO ECONOMISM TO DECLASSIFICATION.



Market St. Williams

CONFICTIAL

W 64

WEAPON SYSTEM 117L PROGRAM STATUS REPORT

For Month Ending 31 August 1958 RCS DD-SD(M) 242

DOWNGRADED AT 12 YEAR *
INTERVALS: 1
DECLASSIFIED 5200.10


Prepared by
AIR FORCE BALLISTIC MISSILE DIVISION
HEADQUARTERS
AIR RESEARCH AND DEVELOPMENT COMMAND
United States Air Force
Post Office Box 262
Inglewood, California

·...

CONFIDENTIAL

WDPC-58-27

Copy <u>78</u> of 125



COMERCIATION

AIR FORCE BALLISTIC MISSILE DIVISION
HEADQUARTERS
AIR RESEARCH AND DEVELOPMENT COMMAND
United States Air Force
Post Office Box 262
Inglewood, California

WDPC

8 September 1958

WEAPON SYSTEM 117L PROGRAM STATUS REPORT For Month Ending 31 August 1958 RCS DD-SD(M) 242

FOREWORD

This is the fifth report to ARPA on the activities in the Weapon System 117L program. The report summarizes program progress during the month of August and will be consolidated with July and September information for inclusion in a formal quarterly report as of 30 September.

The SENTRY program has progressed satisfactorily and is on schedule.

Menor General, USAF

Gamender

ADVANCED RECORNAISSANCE SYSTEM

GLOSSARY

PROGRAMS

Program I ATLAS-boosted Engineering Prototype Test

Program IIA Engineering Test and Biomedical Program

Program II Pioneer Visual Reconnaissance Program

Program III Pioneer Electronic Reconnaissance Program

Program IV Advanced Visual Reconnaissance Program

Program V Advanced Electronic Reconnaissance Program

Program VI Visual Surveillance Program

Program VII Infrared Surveillance Program

Program VIII Electronic Surveillance Program

PROPULSION

Booster ATLAS and THOR Missiles

ARS XLR81-Be-3 15,150-1b thrust engine; pump-fed;

263 lb sec/lb vacuum specific impulse;


JP-4/IRFMA

XLR81-Be-5 15,150-1b thrust engine; pump-fed;

277 lb sec/lb vacuum specific impulse;

UDMH/IRFNA





WEAPON SYSTEM 117L PROGRAM STATUS REPORT For Month Ending 31 August 1958 RCS DD-SD(N) 242

I. BRIEF OF PROGRESS

Taking advantage of increased rocket thrust, design criteria for the ATLAS-boosted SENTRY vehicle were altered to increase the total vehicle weight from 9,300 pounds to 11,600 pounds and the on-orbit weight from approximately 3,500 pounds to approximately 5,000 pounds.

Preliminary flight rating tests of two XLRS1-Be-3 engines were successfully completed.

Ten hot firings were accomplished at the Santa Cruz Test Base using XLRS1-Be-3 engine serial #4.


All components of the guidance and flight control subsystem for SENTRY flight vehicle #1 have been received by Lockheed and are undergoing acceptance and checkout tests.

The present configuration of the airborne film processor successfully completed a 24-day continuous life test. Initial tests of additional visual reconnaissance subsystem components were successful.

Detailed plans have been established for recovery of the biomedical package. Biomedical experiments have been scheduled for THOR/SENTRY flights #3, 4, 6, 8 and 10.

Initial installation of launch and blockhouse equipment at Cooke Air Force Base began in August. A detailed schedule for SENTRY activities at Cooke was prepared.

Interim tracking and telemetry facilities are beneficially occupied at Cooke Air Force Base, California; Ksena Point, Oahu, Hawaii; Annette Island, Alaska; and Kodiak Island, Alaska.



II. TOPICAL SURMARY

A. FLIGHT TEST PROGRAM


- 1. Preliminary flight rating tests (PFRT) were completed on two XLRSI-Be-3 engines. The tests, conducted at the Bell Aircraft Corporation beginning in June, were successful. After test completion, these PFRT engines were disassembled for review by contractor and Air Force personnel. A PFRT report has been prepared.
- 2. The detailed schedule for equipment installation and operations at the THOR/SENTRY launch complex at Cooke Air Force Base, California, has been prepared. In accordance with this schedule, the initial installation of launch and blockhouse equipment began the week of 18 August. A facility-checkout SENTRY vehicle will be used for installation checkout prior to the arrival of the first SENTRY flight vehicle.

B. SATELLITE AIRFRANE SUBSYSTEM

- SENTRY vehicle were altered to increase the total vehicle weight and the on-orbit weight. Increases in ATLAS hooster performance above that anticipated, together with increased performance of the SENTRY vehicle resulting from change to unsymmetrical di-methyl hydrazine (UDNH) as a fuel, allow an increase in the gross weight of the SENTRY vehicle from 9,300 pounds to 11,600 pounds. The allowable increase in the gross weight of the SENTRY vehicle permits an increase of the on-orbit weight from approximately 3,500 pounds to approximately 5,000 pounds. ATLAS boosters to be used for the SENTRY are being strengthened to carry these higher loads.
- 2. THOR-boosted flight test vehicles #1 and 2 are undergoing modification and checkout at the Lockheed Missile System Division. See Figures 1 through 8. The propellant tanks in flight test vehicle #1 were removed and a new set was installed. This installation included a fix on the oxidizer feed line to correct failure of a vibration absorbing bellows in the oxidizer feed line under extended vibration tests. The fix involved replacing the aluminum bellows with a steel bellows possessing better vibration characteristics.

C. SATELLITE PROPULSION SUBSYSTEM

Ten hot firings were accomplished at the Santa Crus Test Base using XLRS1-Be-3 engine serial #4. Hine of the hot firings were successful. In the one unsuccessful firing, flameout in the gas generator during start resulted in premature shutdown. The cause of flameout is being investigated. Cold flow testing of the XLRS1-Be-3 engine configuration is nearing completion with sixteen propulsion test assembly cold flow tests performed during the month.



D. GUIDANCE AND FLIGHT CONTROL SUBSYSTEM

- 1. All components of the guidance and flight control subsystem for SEMTRY flight vehicle #1 have been received by Lockheed and are undergoing acceptance and checkout tests. No major discrepancies have been found.
- 2. A number of components for SENTRY flight vehicle #2 have also been received and are undergoing tests. Among these is an attitude damping unit which will be used to control the satellite attitude in orbit. Attitude damping will not be used on flight vehicle #1.
- 3. A typical ATLAS/SENTRY ascent, illustrating the functions of the guidance and control subsystem, is shown in Figure 9.

E. VISUAL RECOMMAISSANCE SUBSYSTEM

- 1. The present configuration of the airborne film processor has successfully completed a 24-day continuous life test at the Eastman Kodak Company. This design is presently planned for the first visual flights. It is a pre-soaked web processor type which carries a monobath developer solution on the web material. The web is brought into contact with the exposed film and processing takes place while the two are in contact. The processor does not require solution storage tanks, valves, or plumbing and gives promise of being a highly reliable item. During the 24-day unattended test, photographic quality was maintained at an acceptable level.
- 2. The first model of the high-speed 35 mm processor for the ground station has been delivered and is being readied for testing. A development model of the film readout equipment built by the Columbia Broadcasting System for Eastman Kodak is undergoing tests at the Eastman Kodak Company. Initial tests of these equipments have been successful; however, considerable equipment "debugging" is necessary. A simulated air photo mosaic of the SENTRY visual reconnaissance system using a sixinch focal length lens is shown in Figure 10.

P. BIOMEDICAL SUBSYSTEM

1. Detailed plans have been established for recovery of the biomedical capsule. The recovery phase will operate in the following manner. On the seventeenth pass over Alaska, a ground signal to the satellite programmer will command the satellite (orbiting in a horizontal nose-first attitude) to pitch down on the eighteenth pass. The biomedical recovery capsule is then separated from the SENTRY satellite. A set of two spin rockets is fired and the biomedical recovery package is spun at approximately 60 rpm for stabilization. The retro-rocket is then fired. After the retro-rocket is fired, a set of two additional spin rockets is





fired to counteract the original rotation, and the biomedical recovery capsule is permitted to right itself acrodynamically. The retro-rocket and spin rockets are jettisoned simultaneously after burnout. During reentry into the atmosphere, the biomedical capsule is protected by ablative material. At approximately 50,000 feet a radar reflective parachute is opened. The remainder of the ablative material is jettisoned and chaff is released. A radio beacon of greater than 50-mile range and a flashing light, visible for 10 miles during the day and 50 miles at night, is turned on. Lockheed NC-121 (Constellation) radar aircraft track the descending package and guide Fairchild C-119 aircraft to the recovery point. Recovery is made by the C-119 at or below approximately 10,000 feet by means of a cable loop with hooks which snag the parachute canopy, after which a winch will draw the collapsed parachute and capsule into the aircraft. In the event that air recovery is not successful, surface vessels will provide backup for water recovery.

2. An over-all recovery program test plan has been prepared. Tests will be performed with weights simulating the recovery capsule. Radar reflective parachutes and chaff will be tracked by the radar of the RC-121 aircraft. Full scale air and water recovery tests will be conducted with the simulated capsule carrying flashing lights and radio beacons. Biomedical experiments have been established for THOR/SEMTRY flights #3, 4, 6, 8, and 10.


G. GEOPHYSICAL ENVIRONMENT

The Air Force Cambridge Research Center (ARDC) is performing geophysical environment subsystem investigations for the SENTRY satellite, utilizing rockets to test instrumentation to be flown in the early vehicles, and at the same time, obtaining geophysical and environmental design criteria for SENTRY. To date, eight Aerobee and two Mike-Cajum rockets instrumented by the Geophysics Research Directorate of the Cambridge Research Center, have been launched at the Air Force Missile Development Center, New Mexico. Six of these rockets were successful; the other four encountered rocket failure. In addition to proving out instrumentation techniques for SENTRY, information on the intensity of solar ultra-violet radiation and spatial density of micrometeorite particles was obtained. All this information is important in establishing SENTRY environmental design criteria.

H. FACILITIES AND SITES

1. Launch Facilities

a. Final designs of the launch complex and the missile assembly building at Cooke Air Force Base are underway. Completion of the plans and specifications is scheduled for 31 October. The contract construction award will be made in December.



- b. Construction of the launch stand for the first SENTRY THOR-boosted firing at Cooke Air Force Base has been completed. Equipping of the facility is underway.
- c. Modification of the launch stand for the low latitude test firings of the SEMTRY from the Air Force Missile Test Center (AFMIG), Florida, started during August.
- d. Firm requirements for modification of Assembly Building "E" at AFMIC have been established and design has been started.


2. Tracking, Control, Telemetry and Data Acquisition Facilities


a. Locations of tracking and control stations for THOR/ SENTRY flights are shown in Figure 11.

Ŋ


- b. Interim tracking and telemetry facilities at Cooke Air Force Base are now ready for beneficial occupancy. Although no actual equipping has started, equipment is being moved from the factories to the site at the present time. Design of the permanent test tracking facility is complete except for the data acquisition and processing building. Review of preliminary plans for the data acquisition and processing building is underway.
- c. Interim tracking and telemetry facilities at Kaena Point, Oahu Island, Hawaii, are now beneficially occupied and equipping mass started. Plans and specifications have been released for construction of the permanent tracking station.
- d. Tracking and telemetry facilities at Annette Island, Alaska, and at Cape Chiniak, Kodiak Island, Alaska, are now beneficially occupied.
- e. The Air Force Ballistic Missiles Committee has formally approved the selection of New Boston Bombing Range, Grenier Air Force Base, New Hampshire, as the site of the Northeast tracking and data acquisition station. Final design of this facility will start about 20 October.
- f. Design of the Northwest tracking and data acquisition station at Fort Stevens, Tongue Point, Oregon, has started and is progressing satisfactorily.
- g. The recommendation of the site selection board to use the deactivated Maval Air Station at Ottumwa, Iowa, as the location of the Central tracking and data acquisition station was referred to Headquarters USAF for approval.

WDPC-58-27



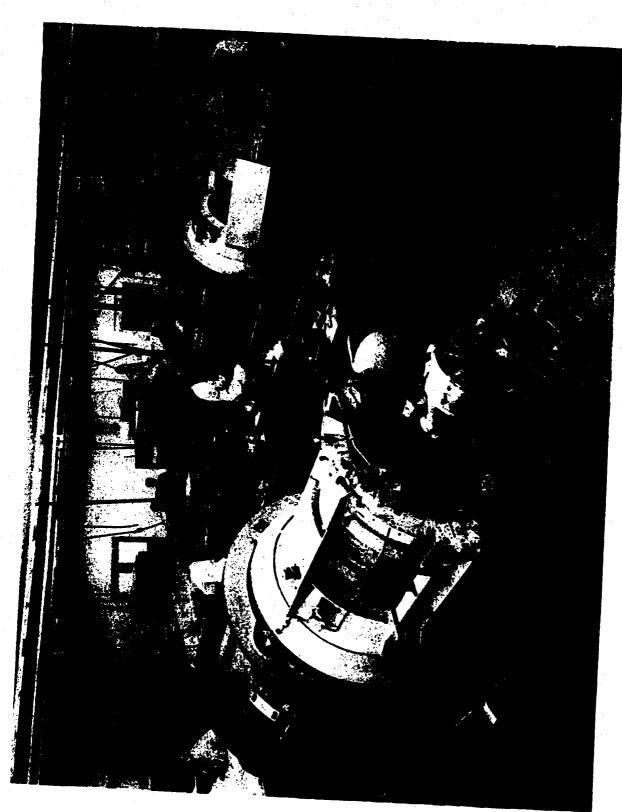


SENTRY vehicles in various stages of assembly and inspection on the assembly line at the Lockheed Missile System Division. (WDPC-58-27) Figures 1 through 8.

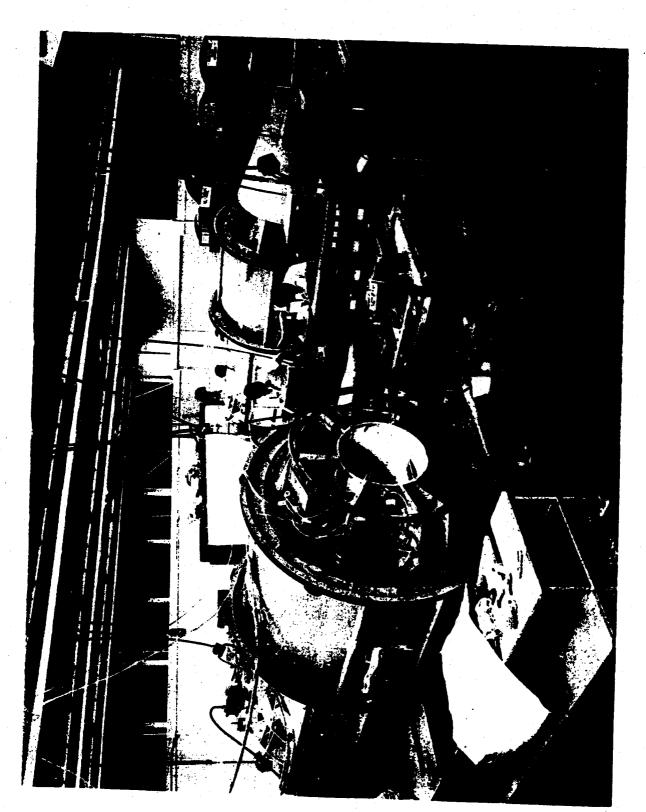

(WDPC-58-27)

Figure 2

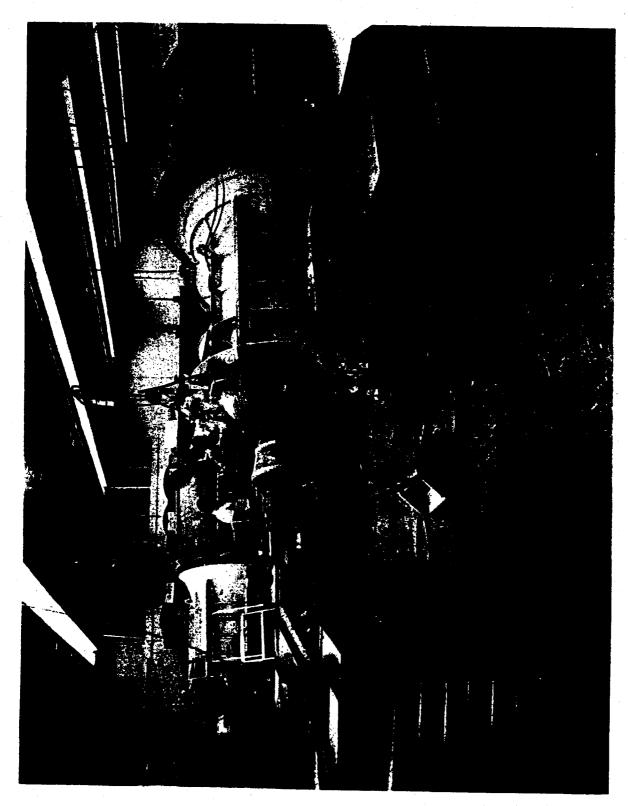


Ŋ

7,

(WDPC-58-27)

Figure 3

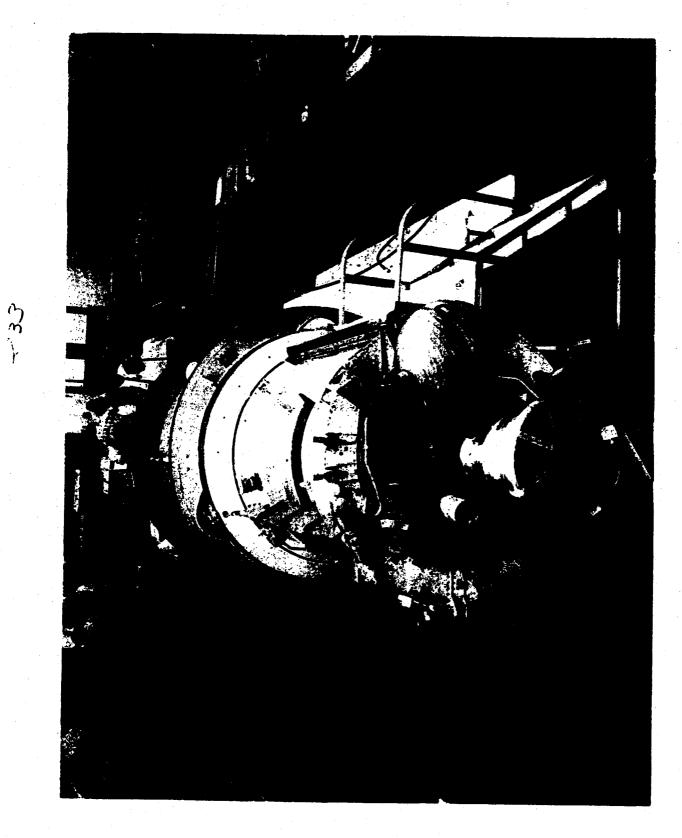


(WDPC-58-27)


Figure 4





Figure 5

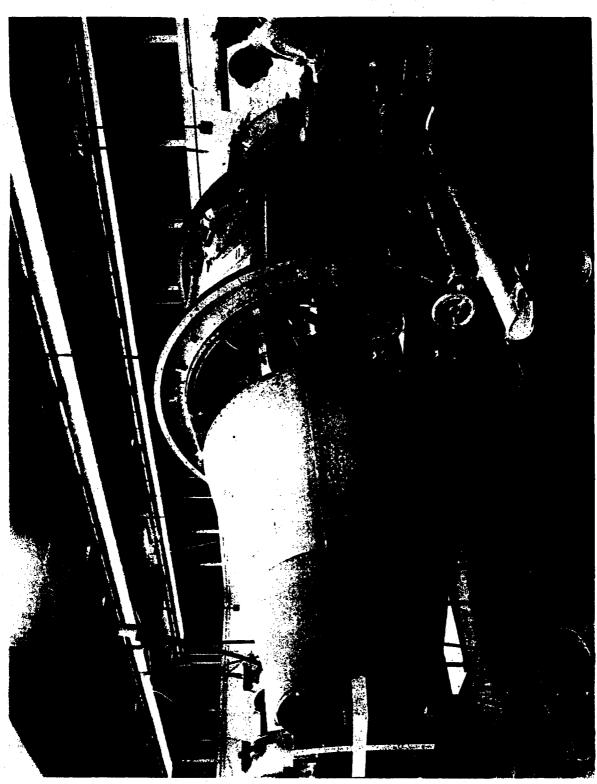



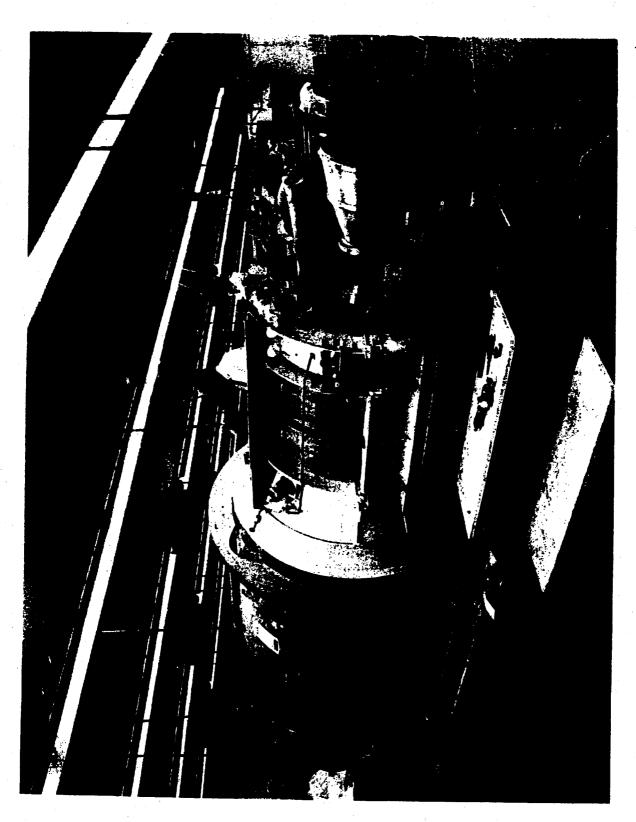

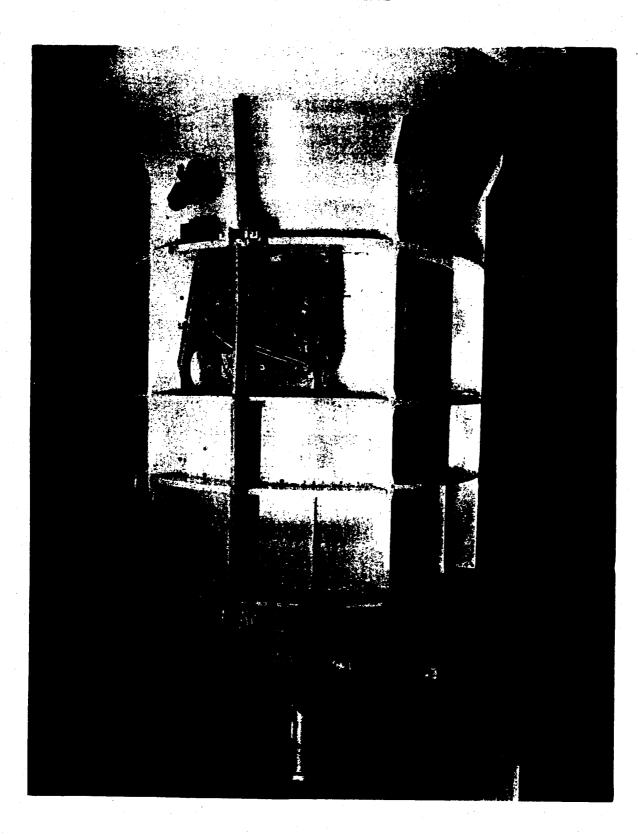

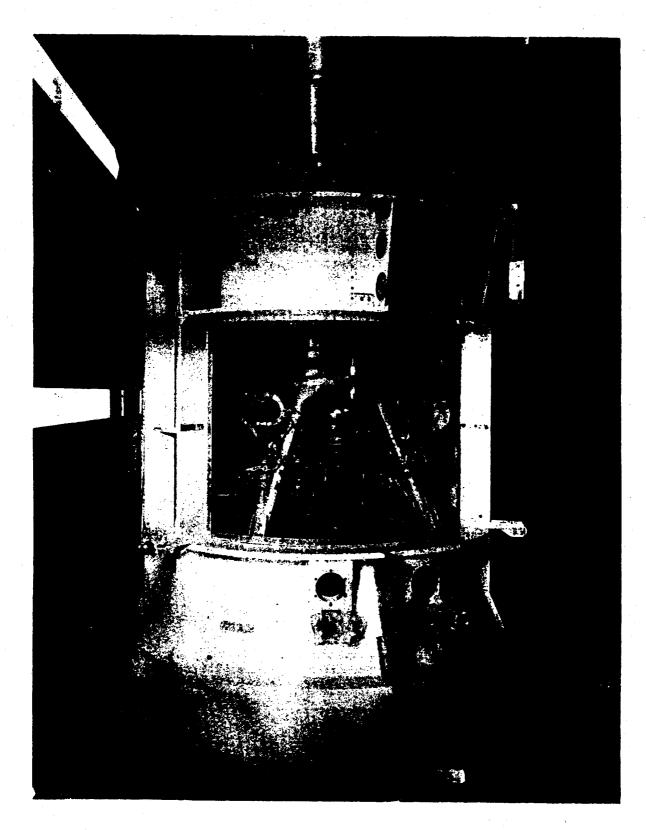

1000


(WDPC-58-27)

Figure 8

30 m


ANCE & CONTROL SYS

TYPICAL WS117L ASCENT

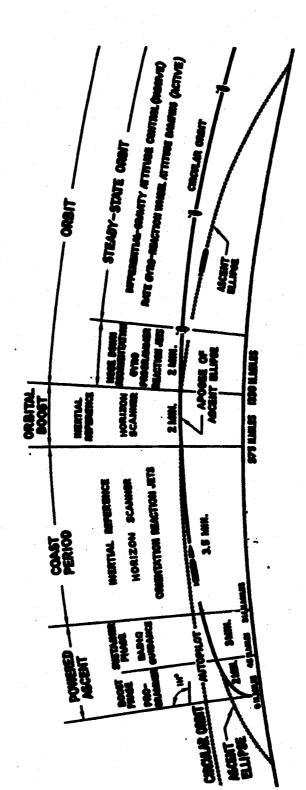

Typical AILAS/SENTRY ascent illustrating functions of the guidance and control subsystems. Figure 9.

(WDPC-58-27)

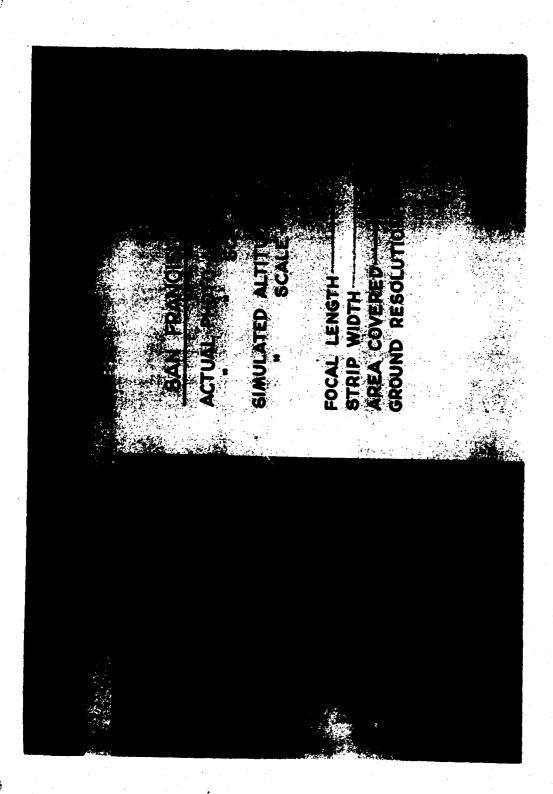

235

Figure 10. SENTRY Visual Reconnaissance System simulated air photo mosaic.

(WDPC-58-27)

O'EU.

١

ダズの


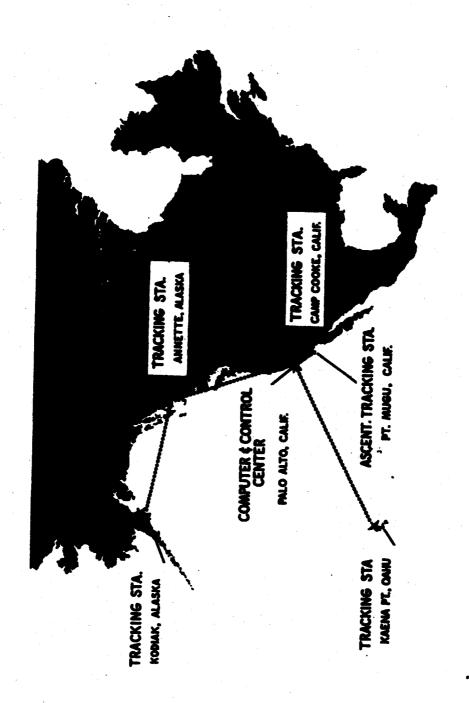


Figure 11. Locations of tracking and control stations for THOR-boosted SENTRY vehicles. (WDPC-58-27)

CEARET





DISTRIBUTION

Assistant Chief of Staff for Guided Missiles		30
Commander, Air Research & Development Command		10
Commander-in-Chief, Strategic Air Command		1
Commander, Air Training Command		ī
Commander, Continental Air Befense Command		. 1
Commander, Air Force Missile Test Center		1
Commander, Air Force Cembridge Research Center		2
Commander, Rome Air Development Center		7
Commander, Wright Air Development Center		11
Commander, San Bernardino Air Materiel Area		2
Commander, Sacramento Air Materiel Area		ī
Air Force Ballistic Missile Division (Hq ARDC)		34
Ballistic Missiles Office (Hq AMC)	•	5
Assistant CINCSAC (SAC MIKE)		10



WDGO

MEMORANDIM FOR GEEERAL LARGE

12 SEP 1958

SUBJECT: Changes in W3-117L Schedules

- 1. I am numer that Cameral Power has sent a request to the Chief of Stuff containing proposed operational dates for WS-117L based upon RAD schedules submitted by AFAID in the Advanced Recommissance System (WS-117L) Development Flan, dated 15 March 1958.
- 2. Subsequent to Harch 1950, a budget ceiling of \$215 M was established for the MS-117h program during Ff 1959. This fund limitation has necessitated the cancellation of flights and reprograming of other necessary NAD so that the carliest date on which operational flights offer the supervision of SAC could be accomplished is approximately Hoverber 1951. This date estimate is based upon a towardine program not yet submitted. At this time the continuing effort being applied to this reprograming problem indicates that even the hoverber 1961 date is infirm and may well a slip farther into the future.
- 3. We expect to iincline a new development plan for submission about the end of September at which time I am sure that the operational portion of this new development plan must be drawn up with operational program dates properly in step with RAD empabilities. This being the case I suggest that some SAC/MINE action may be necessary in connection with General Power's letter which proposes a program not now within our real capabilities.

ORIGINAL SIGNED:
B. A. SCHRIEVER
B. X. SCHRIEVER
Major General, USAF

DOWNGRADED AT 12 YEAR INTERVALS: NOT AUTOMATICALLY DECLASSIFIED. DOD DIR 5200.10



CONFIDENTIAL

WDG0-58-15

WDGVL

WDGE

"A PARAPHRASE NOT RECOVERY TO CATEGORY & ENCRYTE! MOVE ALL INTERNAL SERV GROUP PROPERTY TO PREASURE

RECEIVED WDD ARDC ACTION SUDE

16 SEP 1958 17 - 03

11:0: WOT-WAY

PP RJWZEK RJEDSQ DE RJEZIF 9C

P 151545Z FM CHOR ARDC ANDREWS AFF MD

TO RUWZEK/COMAFBMD ARDC INGLEWCOD CALIF

RJEDSQ/COMDR DET 1 ARDC WRIGHT PATTERSON AFE OHIO

LXS E C R E T/ FM RDZGA9-13-E - FOLOWING IS SPACE ACTIVITY DAILY

FOR 16 SEP 58. SUBJECT SPACE ACTIVITY DAILY

BY MEMORANDUM, LATER 10 SEPTEMBE 1958, ARPA ADVISES THAT THEY WISH TO SEFAGATE AND ASSIGN DIFFERENT TERMINOLOGY TO THE SEVERAL PRO-GRAMS BEING COMPUCTED UNDER WS-117L /ADVANCED RECOMMAISMANCE SUSTEM/ FOR BUDGET JUSTIFICATION AND PROGRAM MANAGEMENT PUNFOCES. ARPA REQUEST TATHE TERMS-1172 BE ABANDONED AND THE NAME SENTRY BE APPLIED ONLY TO THOSE OPERATIONAL CAFABILITIES PREVIOUSLY DESIGNATED AS PIGNEER VISUAL /PROGRAM II/ AD PIONEER FERRET /PROGRAM III ALL
OTHER ITEMS WILL BE EUDGETED NOT AS SYSTEMS, BUT AS SUB-SYSTEMS AND/
OR COMPONENTS. THE ABOVE CHANGES ARE TO BE FULLY EFFECTIVE BY FY 1950
/S S E C R E T /
BT
16/1558Z SEP KJELF)

PLC ACKI

DOWNGRADED AT 12 YEAR INTERVALS: NOT AUTOMATICALLY DECLASSIFIED. DOD DIR 5200.10

67

WDISR

26 Sep 1958

SUBJECT: (U) Release of WS 117L Information to Foreign Mationals

TO:

Assistant Chief of Staff, Intelligence Headquarters, USAF Washington 25, D. C.

1. References:

- a. Headquarters USAF letter to the Air Force Ballistic Missile Division, "Change of Visitor Control Procedures and WS 107A, WS 117L and WS 315A Projects", dated 29 July 1958; and 1st Indorsement to Hq USAF dated 8 August 1958.
- b. Hq USAF message AFCIN 46741 to AFPR, Lockheed Aircraft Corporation, dated 11 August 1958.
- 2. The correspondence listed above relates to approval by AFCIN of visits to WS 117L contractors by Foreign Mationals. The first instance concerns Massachusetts Institute of Technology; the second, Lockheed Aircraft Corporation. In each case, the Air Force Bellistic, Missile Division questioned the visit authorization because of the unusual sensitivity of some aspects of WS 117L.
- 3. These two examples may indicate a misunderstanding on our part. Although WS 117L is not explicitly covered in the AF-DCMI 1956, we have assumed that a very restrictive interpretation would be appropriate and would be in keeping with the present security measures for the program. We assume that the problems raised in connection with the releasibility of classified information pertaining to Space Weapons will make necessary a revision of the AF-DCMI to include specific policy on this subject. In the meantime, we would appreciate your guidance on the release of WS 117L information to Foreign Mationals.

FOR THE COMMANDER:

(signed)

J. L. HAMILTON Colonel, USAF Executive Officer

DOWNGRADED AT 12 YUINTERVALS; NOT AUTOMATICALL. DECLASSIFIED. DOD DIR 5200.10

WDTSR 58-451



ey A



WEAPON SYSTEM 117L PROGRAM STATUS REPORT.


Quarter Ending 30 September 1958

RCS BD-SD (M) 242

Prepared by AIR FORCE BALLISTIC MISSILE DIVISION HEADQUARTERS AIR RESEARCH AND DEVELOPMENT COMMAND United States Air Force Post Office Box 262 Inglewood, California

MDPC-58-30

COPY 80 of 125





AIR FORCE BALLISTIC MISSILE DIVISION
HEADQUARTERS
AIR RESEARCH AND DEVELOPMENT COMMAND
United States Air Force
Post Office Box 262
Inglewood, California

WDPCR


8 October 1958

WEAPON SYSTEM 117L PROGRAM STATUS REPORT Quarter Ending 30 September 1958 RCS DD-SD(M) 242

POREWORD

This report summarizes the progress made in the Advanced Reconnaissance System program during the period 1 July through 30 September 1958.

or General, USAF





ADVANCED RECOMMAISSANCE SYSTEM

GLOSSARY

PROGRAMS

Program I ATLAS-boosted Engineering Prototype Test

Program IIA Engineering Test and Biomedical Program

Pioneer Visual Reconnaissance Program Program II

Program III Pioneer Electronic Reconnaissance Program

Program IV Advanced Visual Reconnaissance Program

Program V Advanced Electronic Reconnaissance Program

Program VI Visual Surveillance Program

Program VII Infrared Surveillance Program

Program VIII Electronic Surveillance Program

PROPULSION

Booster ATLAS and THOR Missiles

ARS XLR81-Be-3 15,150-1b thrust engine; pump-fed; 263 lb sec/lb vacuum specific impulse;

JP-4/IRFNA

XLR81-Be-5 15,150-1b thrust engine; pump-fed;

277 1b sec/1b vacuum specific impulse;

UDMI/IRPNA

WEAPON SYSTEM 117L PROGRAM STATUS REPORT Quarter Ending 30 September 1958 RCS DD-SD(M) 242

I. BRIEF OF PROGRESS

Final design of the first two SENTRY/THOR flight test vehicles is complete, and equipment installation design is underway on the others. Preparations for launch of SENTRY/THOR #1 from Vandenberg (previously Cooke) Air Force Base are underway, with launch scheduled for 6 December. The first flight test vehicle has been delivered by Lockheed to the Santa Cruz test base where it will undergo hot firings in October before its shipment to Vandenberg.

SENTRY/ATLAS design criteria has been altered to increase total vehicle weight and on-orbit weight. A change in the type fuel to be used in SENTRY/ATLAS has resulted in performance increase allowing a gross weight increase from 9,300 to 11,600 pounds and an on-orbit weight increase from approximately 3,500 to approximately 5,000 pounds.

X

All SENTRY/THOR XLR81-Be-3 engines have been completed, acceptance tested, and delivered to the Lockheed Missile Systems Division by Bell * Aircraft Corporation. Propulsion systems scheduled for the first two SENTRY/THOR flight test vehicles underwent hot firings at Lockheed, and engine serial #4 was subjected to ten hot firings at the Santa Cruz test base (Figure 1). Cold flow testing of this engine configuration is nearing completion.

A prototype unsymmetrical di-methyl hydrazine (UDMH) engine underwent two full firings with performance within specifications, resulting in final assembly and delivery of the first UDMH engine to bockheed.

All subsystem development proceeded as scheduled. All components of the auxiliary power subsystem for SENTRY/THOR #1 were received and acceptance tested by Lockheed. Some problems have been experienced in the 2000 cycle and 400 cycle static inverters. A 400-cycle rotary inverter will be used in SENTRY/THOR #1. Lockheed also received and tested all components of the guidance and control sybsystem for SENTRY/THOR #1 and a number of components of this subsystem for SENTRY/THOR #2. Equipment development for the biomedical program is on schedule. The Air Force School of Aviation Medicine is acting as consultant to Lockheed on biomedical aspects of capsule design and will supply and train test animals for this program. Detailed plans were established for reentry from orbit and recovery of the biomedical package; an air recovery test program is underway.





Facility design of the SEMTRY/ATIAS launch complex at Vandenberg Air Force Base is scheduled for completion on 15 Movember. Interim tracking and telemetry facilities were beneficially occupied at Vandenberg Air Force Base, California; Maval Air Missile Test Center, Point Magu, Galifornia; Kaena Point, Gahu, Hawaii; Annette Island, Alaska; and Kodiak Island, Alaska. Design of the Morthwest tracking and data acquisition station is scheduled for completion in October; the architect-engineer for design of the Mortheast station was selected in September. Siting of the Central station at the former Maval Air Station, Ottuwa, Iowa, was approved.



II. TOPICAL SUMMARY

A. FLIGHT TEST PROGRAM

- 1. Progress on the SENTRY flight test program during the quarterly period 1 July through 30 September included determination of flight test objectives for all SENTRY/THOR flights.
- 2. A detailed test plan for the first SENTRY flight was prepared. Minor rescheduling has changed the launch date to 6 December, two weeks later than originally planned. The overall SENTRY program will not be affected.
- 3. Modification and checkout operations on the first THOR-boosted flight test vehicles were completed at Lockheed Missile Systems Division during September. The vehicle was shipped from the Lockheed plant at Palo Alto to the Hazard test base at Santa Cruz where it will undergo two hot firing tests prior to October shipment to the launch site at Vandenberg Air Force Base.
- 4. Installation of launch and blockhouse equipment began the week of 18 August in accordance with the schedule established for equipment installation and operations at the SENTRY/THOR launch complex at Vandenberg. A facility-checkout vehicle is being used for installation checkout pending the arrival of the first SENTRY flight vehicle.

B. SATELLITE AIRFRAME SUBSYSTEM

- 1. Final design of the first two SENTRY/THOR flight vehicles was completed, and equipment installation design was underway on the remaining vehicles. SENTRY/THORs #1 and #2 underwent modification and checkout at the Lockheed Missile Systems Division, where the spun aluminum tanks were replaced in SENTRY/THOR #1. The installation included a fix on the oxidizer feed line to correct failure of a vibration absorbing bellows under extended vibration tests. The aluminum bellows was replaced with a steel bellows possessing better vibration characteristics. SENTRY/THOR #1 completed modification and checkout operations in September; SENTRY/THOR #2 checkout is still underway. (Figures 2, 3, and 4)
- 2. Design criteria for ATLAS-boosted SENTRY vehicles was altered to increase the total vehicle weight and on-orbit weight. Increases in ATLAS booster performance above that anticipated and increased performance of the SENTRY vehicle resulting from use of unsymmetrical di-methyl hydrazine (UDMH) as a fuel allowed an increase in the gross weight of the SENTRY vehicle from 9,300 to 11,600 pounds. The allowable increase in the gross weight of




-1

the SENTRY vehicle permits an increase of the on-orbit weight from approximately 3,500 to 5,000 pounds. ATLAS boosters to be used with SENTRY vehicles are being strengthened to carry these higher loads.

made to fabricate two propulsion test vehicle assemblies (PTVA) to provide a test vehicle backup. The soundness of this decision was demonstrated during September, when two failures occurred in PTVA units. The first failure involved the explosion of a high pressure helium sphere on the third hot firing of the unit. This sphere was constructed of laminated fiberglas and had previously been subjected to two hot-firing cycles without incident. Fiberglas spheres were used as an interim measure pending completion of titanium spheres which will be used on the final vehicles. Damage resulting from the explosion was minor, and the PTVA was repaired for resumption of the PTVA test program. The second failure occurred in the second PTVA on 19 September when an explosion and burning of the engine damaged the unit beyond repair. Only minor damage was sustained by the test stand and repairs are underway. An evaluation of cause for the failure has not been completed. Another vehicle is being assembled using spare components.

C. SATELLITE PROPULSION SYSTEM

- 1. Preliminary flight rating tests on two XLR81-Be-3 engines were successfully completed by the Bell Aircraft Corporation. Following the tests, the engines were disassembled for review by contractor and Air Force personnel.
- 2. Hot firings were conducted on engines delivered to Lockheed in SENTRY/THORS #1 and #2.
- 3. Ten hot firings were accomplished at the Santa Cruz test base using XLR81-Be-3 engine serial #4. Nine of the hot firings were successful; in the one unsuccessful firing, flameout in the gas generator during start caused premature shutdown.
- 4. Cold flow testing of the XLR81-Be-3 engine configuration neared completion.
- 5. Two full-duration firings of the prototype unsymmetrical di-methyl hydrazine (UDMH) engine during September gave evidence that engine performance was within specifications. As a result, assembly operations were completed on the first UDMH flight engine and the engine was delivered to the Lockheed Missile Systems Division.



6. All XLRS1-Be-3 engines to be used in the SEMIRY/THOR program have been completed, acceptance tested, and delivered to Lockheed by the Bell Aircraft Corporation. Performance of all engines was well within specification requirements.

D. AUXILIARY POWER SUBSYSTEM

- 1. All components for the auxiliary power subsystem of the first SENTRY/THOR flight vehicle have been delivered to Lockheed and subjected to acceptance testing. Some difficulty has been experienced with the 2000-cycle and 400-cycle static inverters. A 400-cycle rotary inverter has been installed in SENTRY/THOR #1.
- 2. Plans for SENTRY/ATLAS solar battery tests in connection with the ATLAS-boosted engineering prototype testing program are proceeding satisfactorily.

E. GUIDANCE AND CONTROL SUBSYSTEM


- 1. All aspects of the guidance and control subsystem for the THOR-boosted SENTRY program are on schedule. Figure 5 depicts a typical launch-to-orbit of the SENTRY vehicle. Figure 6 outlines the typical ground trace of the satellite when launched on an 183 degree orbit.
- 2. All components of the guidance and flight control subsystem for SENTRY/THOR #1, and a number of components for SENTRY/THOR #2, were received by Lockheed and subjected to acceptance and checkout testing. An attitude damping unit for controlling the satellite in orbit will be used for the first time on SENTRY/THOR #2.

F. SATELLITE CONSUNICATIONS SUBSYSTEM

Deliveries of major items of equipment for the communications subsystem are on schedule. Equipment is being delivered to telemetry sites and tracking and acquisition stations. Shakedown tests of the downrange telemetry ship to be used in the launch program at Vandenberg Air Force Base are scheduled for October. A 60-word-per-minute teletype communications check of the ground communications system is also scheduled for October.

G. BIOMEDICAL RECOVERY PROGRAM

1. All biomedical equipment development is on schedule. A Ricomockup of the biomedical recovery capsule has been completed (Figure 7); the first biomedical recovery capsule is scheduled for delivery by General





Electric in October. The Air Force School of Aviation Medicine is acting as technical consultant to the Lockheed Aircraft Corporation on all biomedical aspects of the capsule design and will supply and train test animals to be used in the program.

- 2. An air recovery test program is underway, and detailed Reo plans have been established for recovery of the bicmedical package. Figure 8 is an artist's conception of the biemedical recovery system which will operate in the following manner. On the seventeenth pass over Alaska, a ground signal to the satellite programmer will command the satellite (orbiting in a horizontal nose-first attitude) to pitch down on the eighteenth pass. The biomedical recovery capsule is then separated from the SENTRY satellite. A set of two spin rockets is fired and the biomedical recovery package is spun at approximately 60 rpm for stabilization. The retro-rocket is then fired. After the retro-rocket is fired, a set of two additional spin rockets is fired to counteract the original rotation, and the biomedical recovery capsule is permitted to right itself aerodynamically. The retro-rocket and spin rockets are jettisoned simultaneously after burnout. During reentry into the atmosphere, the biomedical capsule is protected by ablative material. At approximately 50,000 feet a radar reflective parachute is opened. The remainder of the ablative material is jettisoned and chaff is released. A radio beacon of greater than 50-mile range and a flashing light, visible for 10 miles during the day and 50 miles at night, are turned on. Lockheed RC-121 (Constellation) radar aircraft track the descending package and guide Fairchild C-119 aircraft to the recovery point. Recovery is made by the C-119 at or below approximately 10,000 feet by means of a cable loop with hooks which snag the parachute canepy, after which a winch will draw the collapsed parachute and capsule into the aircraft. In the event that air recovery is not successful, surface vessels will provide backup for water recovery.
- 3. An overall recovery program test plan has been prepared. Tests will be performed with weights simulating the recovery capsule. Radar reflective parachutes and chaff will be tracked by the radar of the RC-121 aircraft. Full scale air and water recovery tests will be conducted with the simulated capsule carrying flashing lights and radio beacons. Biomedical experiments have been established for SENTRY/THOR flights #3, 4, 10, and 14.

H. GEOPHYSICAL ENVIRONMENT

The Air Force Cambridge Research Center (ARDC) is performing geophysical environment subsystem investigations for the SENTRY satellite to test instrumentation to be flown in early vehicles and to obtain geophysical and environmental design criteria for SENTRY.



I. FACILITIES AND SITES

1. Launch Facilities

Final design of the SENTRY/ATLAS launch complex at Vandenberg Air Force Base is progressing. A slight delay in completion of the design will result from changes in facility design criteria. Design completion is now scheduled for 15 November instead of 1 November.

2. Assembly Building

An in-progress review of final construction plans for the guided missile assembly building was held early in September. Submittal of completed plans and specifications incorporating all review changes is scheduled for 7 November.

3. Tracking, Control Telemetry and Data Acquisition Facilities

- a. Interim tracking and telemetry facilities at Vandenberg Air Force Base were beneficially occupied. Completion of design of the permanent test tracking facility was delayed owing to a change of criteria affecting the data acquisition and processing building. It is planned to contract for the entire station, less the data acquisition and processing building, and to contract separately for that structure.
- b. Interim tracking and telemetry facilities were beneficially occupied at the Naval Air Missile Test Center, Point Mugu, California.
- c. Interim tracking and telemetry facilities at Kaena Point, Oahu Island, Hawaii, were beneficially occupied and equipping was underway. The contract to complete the tracking station was awarded during September.
- d. Design of the Northwest tracking and data acquisition station at Fort Stevens, Tongue Point, Oregon, progressed satisfactorily. Completion is scheduled for 20 October.
- e. Tracking and telemetry facilities at Annette Island, Alaska, and at Cape Chiniak, Kodiak Island, Alaska, are beneficially
- f. The New Boston Bombing Range, Grenier Air Force Base, New Hampshire, was approved as the Northeast tracking and data acquisition station. The architect-engineer for design of this station was selected in September. Design will be accomplished by site and climatic adaptation of the Northwest tracking and data acquisition station plan.

WDPC-58-30

SECRET

.



g. The former Haval Air Station at Ottumwa, Iowa, was approved as the site of the Central tracking and data acquisition station.

h. Because of recent changes in the weights of certain radars to be utilized at all tracking and data acquisition stations, redesign of their supporting structures will be necessary.

J. OPERATIONS AND PLANS

During September briefings outlining program objectives and funding requirements for the SENTRY program for fiscal years 1959 and 1960 were presented to representatives from the Strategic Air Command, the Air Research and Development Command, the USAF Ballistic Missiles Committee, and the Advanced Research Projects Agency.



SENTRY/THOR engine serial #1 undergoing one of the ten hot firing conducted engines have been acceptance tested and delivered to Lockheed Missile System scheduled for the first two SENTRY/THOR flight test vehicles were subjected with the engine during September at the Santa Cruz Test Base. Engines to similar static firings at Lockheed. All SENTRY/THOR XLR81-Be-3

(WDPC-58-30)

per auth Etr, w 150 et 58 subject "WSIN L Program Water

CONFIDENTIAL



Final design of the first two THOR-boosted SENTRY flight vehicles has been First SENTRY flight test satellite is shown here on a transporter-erector. (WDPC-58-30) completed, and equipment installation is now underway on the remaining SENTRY/THOR vehicles.

Figure 2.

CHEDERTAL DEODET

CONPOENTIAL


First SENTRY flight test satellite ready for shipment to the Santa Cruz Test Base. (WDFC-58-30) Figure 3.

CONFIDENTIAL




Side view of the first SENTRY flight test satellite on its transporter-erector. (WDPC-58-30) Figure 4.

2000

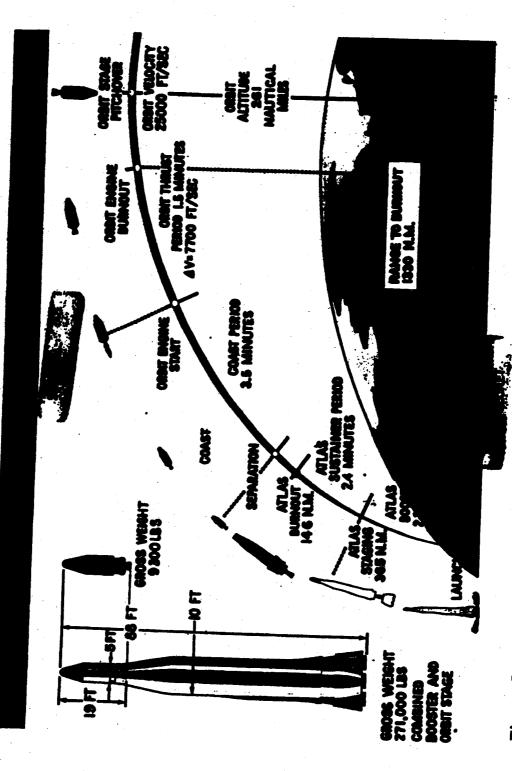


This chart depicts a typical launch-to-orbit trajectory of the SENTRY vehicle. Figure 5.

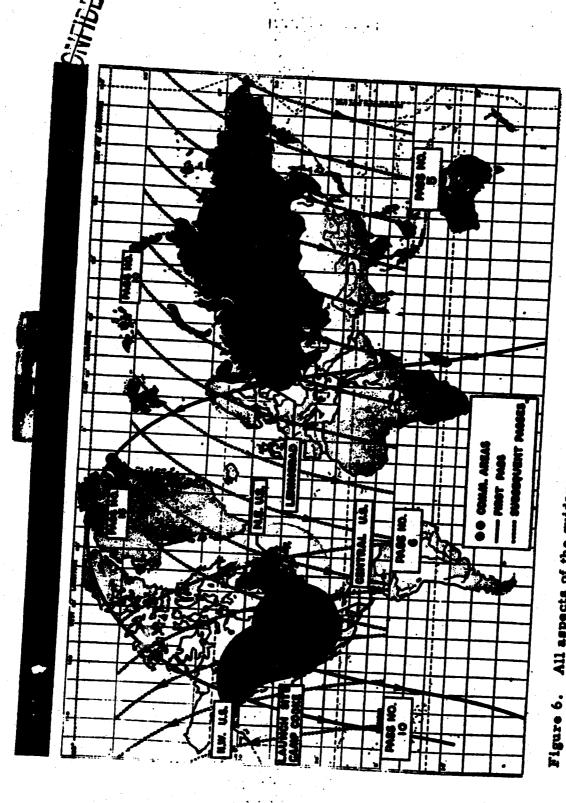

SENTRY program are on schedule. This chart outlines the typical ground All aspects of the guidance and control subsystem for the THOR-boosted trace of the SENTRY satellite when launched on an 183 degree orbit,

(WDPC-58-30)

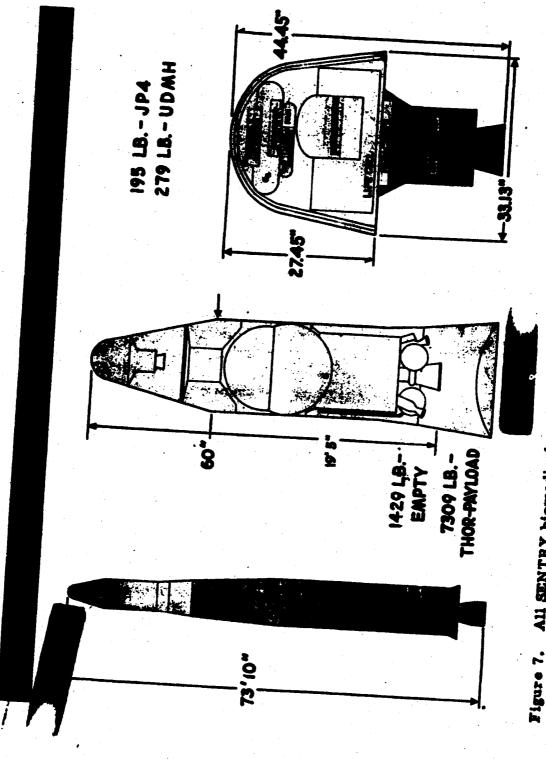


All SENTRY biomedical equipment development is on schedule. A mock-up of the biomedical recovery capsule, as depicted here, has been completed; the first capsule is scheduled for delivery by General Electric in October. (WDPC-58-30)

PROGRAM ILA

Figure 8. CONFIDENTIAL


is an artists conception of the biomedical recovery system utilizing a C-119 aircraft. (WDPC-58-30) A SENTRY air recovery test program is underway, and detailed plans have been established for the recovery of the biomedical package. Shown here



CAMER

DISTRIBUTION

Assistant Chief of Staff for Guided Missiles		
		30
		10
Commander, Air Training Command		
Commander Constant Command		
Commander, Continental Air Defense Command		I
TOTAL BOOK ALL FORMA BEAGET, A		1
		1
		2
Commander, Wright Air Development Center	•	7
Commander Conter Development Center		
Commander, San Bernardino Air Materiel Area		TT
The state of the s		2
TOTAL OF THE PARTITION		1
		34
**************************************		5
Army Ballistic Missile Agency (ABMA)		10
Agronautical Change agency (AEMA)		10
Aeronautical Chart & Information Center		
Rand Corporation, Santa Monica		1
		1

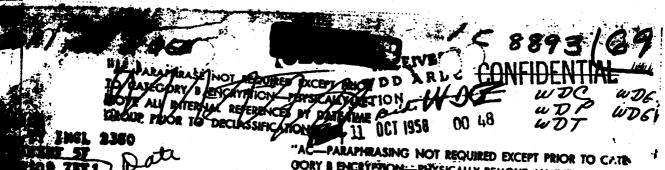

MATTERIC MISSIFE DIA VEDC

"AC—PARAPHRASING NOT REQUIRED EXCEPT PRIOR TO CATE
GORY B ENCRYPTION:—PHYSICALLY REMOVE ALL INTERNAL REGERENCES BY DATE-TIME-GROUP PRIOR TO DECLASSIFICATION—
NQ UNCLASSIFIED REFERENCE IF DATE-TIME GROUP IS QUOTED."

JOHNSON 949420 FOR COMMANDING GENERAL FROM ARPA

TAKE ACTION INMEDIATELY TO CANCEL ALL ELEMENTS OF THE CHARTRY PROGRAM DIRECTED TOWARD PROVIDING AN ATLAS LAUNCH CHARTLET AT PATRICK AFB. BEFER ACTION ON THE BOOSTERS CHARTLES SINCE THEY MAY BE USED IN A REVISED SENTRY FIRM SCHEDULE OUT OF COOKE, THE POSSIBILITY OF A REVISED PROGRAM WILL BE DISCUSSED FURTHER BY REPRESENTATIVES OF MY OFFICE WITH BMD

THIS AC MEC 11/80292 OCT RJUZNY

Cray 24 7:3

DOWNGRADED AT 12 12....
INTERVALS; NOT ADTOMATICALLY
DECLASSIFIED. DOD DIR 5200.10


CONFIDENTIAL

70

SPACE BELOW RESERVED FOR COMMUNICATION CENTER

OPR

PRECEDENCE	-						/
ACTION		MOG	(Cheek)	ACCOUNTING SYMBOL	ORIG. OR REP	F00 700	
into PRIORITY	BOOK	MULTI	SINGLE			-we 10	CLASSIPICATI OF REFERENCE
FROM:			1				The same state of
COMMANDER AIR					<u> </u>		L
BEGLEROOD CALL	MICE	BAL	LBTK	MINGH.	Piranes	SPE	CIAL INSTRUCT
TO: DELLETOOD CALT	TO PATE				THE VALUE OF		
COMMANDE	_					1 .	
COMMANDER ARD	5					- 1	
Andrews aff MD						- 1	
						į.	
NFO: COFS HQ USAF						1	
WASHINGTON DC							
TON DC						- 1	
PCARD TO S						1	
ECRET-FROM WDG-11-8-	Ė						
						- 1	
ifo to afcom, ho usaf	_					1	
WILL OBAY	- DEO	TED	POP 1	MID THE		1	
VD ACTION -				CON THE	HOLLYMAN		
ND ACTION IS A RECENT	TWY D	P^					
· · · · · · · · · · · · · · · · · · ·			AED 3	'rom osd:	"SECRE	T	
EF 949420 FOR COMMAND			. •			•	
EF 949420 FOR COMMAND	ung ge	NER	AL PR	OM ARRA	6	1	•
MNSON	•			- ARFA	MONED	1	
MNSON. PLEASE TAKE	CTION	These	1000 A -			1	
			-UAA	LELY 10 C	ANCEL	1	
L ELEMENTS OF THE 11						1	
CALEMENTS OF THE 11.	IL SEN	rry :	PROG	RAM MEDE	~=====================================		
OVIDING AN ART					CIED 10	ARD	
OVIDING AN ATLAS LAUN	ICH CAI	PARI	LITY		- 1	i	
				at Patri	CK APB.		
PER ACTION ON THE BOO	WTTO.		_			1	
	WITTE	THE	MSEL	VES UNTI	. PITD TTO	L	
FICE. THESE BOOK					- a owing		
DOUSTERS	ARE M	or T	DEE	CANCES .	·	ł	
TICE. THESE BOOSTERS					ed sdice	j	
EY MAY BE USED DI A RE	VISED	t The	- -			l	
	. ——,		WI L	ring sch	EDULE	ĺ	
OF COOKE. THE BOOM	D00 0					DATE	TIME
OF COOKE. THE POSSE	-4411	op 4	REVI	EED DRA	ID Ase		1
						MENTH	-
PURTEE PURTEE	REYE				•		YEAR
LAE DESCUESED FURTHE		74		PATIVES C	PHY	OCI	1
PED NAME AND TITLE (Signature, if required	_					₩.	58
ITLE (Bignature, & required				•			
NE CONTRACTOR OF THE CONTRACTO		IEI	TYPED (r stamped) NAME	AND TITLE		
PAGE	MR. OF PAGES	₹				•	
URITY CLASSIFICATION	PAGES	,J∄I			AT 10 VEAD	ĭ	
		· R		WNGRADED			i
		\perp	INTER	VALS: NO A	LUTOMATICAL	LY.	
		11	DECL	ASSIFIED. DO	D DIR 5200.	.10	!
Committee to the second of the							



SPACE BELOW RESERVED FOR COMMUNICATION CENTER

-	PRECEDENCE								
İ	A COMPANY	TYP	Meg (Ohoob)	ACCOUNTING SYMBOL	ORIG. OR REFERS TO	0 (5) 400		
	INPO PRIORITY	BOOK	MULTI	SINGLE	-11205		O CLASSIFICATION OF REFERENCE		
ż	FROM:		L	<u> </u>		<u>. </u>	.		
ı	ENGLEWOOD CALIFORNIA MINISTER MINISTER DEVELOR								
ı	BIGLEWOOD CALIFOI	NUA				VERNEUM			

TO

SHGRET WDG-11-8-E CONTD

OFFICE WITH BMD PEOPLE." THIS INSTRUCTION FROM OSD IS CONSIDERED CONTRARY TO USAF INTERESTS. AFEMD MESSAGES WDZW-10-5-E AND WDZW-10-9-E CONTAIN ADDITIONAL IMPORMATION ON THIS SUBJECT. EARLY ACTION ON OUR RECOMMENDATIONS CONTAINED THEREIN IS ESSENTIAL.

	DATE	TIME			
ı	- 11	Ĺ			
	MONTH	YEAR			
_[OCT	50			

SYMBOL

SIGNATURE

TYPED (or stemped) NAME AND TITLE

HARRY L. EVANS COLONEL, USAF DERECTOR OF 117L

WHICH WILL BE USED UNTIL EXHAUSTED

PRIORITY

ROUTINE

COMOR AFRED (ARDC) INGLESCOOD CALIF

OSD ARPA WASH DC

IMPO: COPS USAF WASH DC

COMARDO ANDREWS AFB MD

DOWNGRADED AT 12 YEAR INTERVALS: NOT AUTOMATICALLY DECLASSIFIED. DOD DIR 5200.10

SECRET/FROM WDPP 10-1-E.

COFS FOR AFCCM. ARDC FOR RDZ. REFERENCE YOUR MESSAGE DEF 949420 DATED 11 OCT 58. 117L LAUNCHES PREVIOUSLY SCHEDULED FOR APRIC ARE CANCELLED HOWEVER, 5 ATLAS BOOSTERS ORIGINALLY ALLOCATED TO THESE LAUNCHES AT AFMIC REMAIN IN ATLAS PRODUCTION SCHEDULE WITH DELIVERY TO BEGIN DURING FIRST QUARTER 1959 IN THE MODIFIED 117L CONFIGURATION. FUNDING FOR THESE 5 BOOSTERS QUOTED AT 12 MILLION DOLLARS NOT INCLUDED IN ANY CURRENT AFEND FUNDING PROGRAM. IN VIEW OF PRODUCTION AND DELIVERY CONSIDERATIONS, REQUEST CONFIRMATION OF THE FOREGOING DELIVERY SCHEDULE AND ISSUE OF CHLIGATION AUTHORITY FOR THESE BOOSTERS AT EARLIEST POSSIBLE DATE.

WDPP

WALTER SANDERS, MAJOR, USAP

2232

SIGNED

O. J. RITLAND Brig. Gen., USAF

LATTER NO 33

LATER MO 34

LATER MO 35

LATE

PP BJUZDK ME HJEZFT 19C PP 8381352 PM COMATON ARDC/ INCLEVOOD CALIF PD COMATOND /ARDC/ INCLEVOOD CALIF

ANDLAS/TRON REZEN-10-37-E. FOR UDEE, COL MANILTON SHOLM WEE, COL CHRISTIN, AND UDEN, COL EVANS. THE FOLLOWING TWE HERSAGE MEGATIR DEFECTOR OF BURGET, NO USAF, IS CHOTED FOR YOUR SEPTEMBERS YOUR UDEN SOLN WHELAS FROM AFABY AGATE. WITH YOUR ACTIONS IN NOT REPEAT NOT REDUCING THE PROGRAM EFFORT FOR US-1171 AT THIS SEE MEED NOT BE COMPLIED THAT ARPAS LETTER OF 25 SEPTEMBER 1996 THIS NO IS NEETING UITH ARPA OFFICIALS TO DISCUSS THE 1171 METING, UNDOTE, WITHER SUIDANCE AS A RESULT OF THIS METING, UNDOTE,

28/21302 OCT RJEZTY

NO U MAYE MORE IN OUT OF PAER NAME MAYE MAYE ONE SHORT ONE LONG WILL AS TILL YOU GALL NALD MEN THEM PLS

685



SENTRY PROGRAM STATUS REPORT

Month Ending 31 October 1958

RCS BD-SD (M) 242

WW 73

Jigare war finding


DOWNGRADED AT 12 YEAR INTERVALS: NO. A. COMATICALLY DECLASSIFIED. DOD DIR 5200.10

Prepared by
AIR FORCE BALLISTIC MISSILE DIVISION
HEADQUARTERS
AIR RESEARCH AND DEVELOPMENT COMMAND
United States Air Force
Post Office Box 262
Inglewood, California

WDPCR-58-3

Copy 43 of 49

CONFIDENTIAL





AIR FORCE BALLISTIC MISSILE DIVISION HEADQUARTERS AIR RESEARCH AND DEVELOPMENT COMMAND United States Air Force Post Office Box 262 Inglewood, California

WDPCR

10 November 58

SENTRY PROGRAM STATUS REPORT Month Ending 31 October 1958 RCS DD-SD (M) 242


FOREWORD

This report summarizes the progress made in the SENTRY Progrem during the month of October 1958.

B. A. SCHRIEVER

Major General, USAF

Commander





SENTRY PROGRAM STATUS REPORT

GLOSSARY

PROCRAMS

Program I ATLAS-boosted Engineering Prototype Test

Program IIA Engineering Test and Biomedical Program

Program II Pioneer Visual Reconnaissance Program

Program III Pioneer Electronic Reconnaissance Program

Program IV Advanced Visual Reconnaissance Program

Program V Advanced Electronic Reconnaissance Program

Program VI Visual Surveillance Program

Program VII Infrared Surveillance Program

Program VII Electronic Surveillance Program

PROPULSION

Booster ATLAS and THOR Missiles

ARS XLR81-Be-3 15,150-1b thrust engine; pump-fed;

263 lb sec/lb vacuum specific impulse;


JP-4/IRFMA

XLR81-Be-5 15,150-1b thrust engine; pump-fed;

277 lb sec/lb vacuum specific impulse; unsymmetrical di-methyl hydrasine (UDMH);

inhibited red fuming nitric acid (IRFNA)

CONFIDENTIAL



Month Ending 31 October 1958 RGS DD-SD(M) 242

I. BRIEF OF PROGRESS

The first flight test vehicle has successfully completed flight readiness testing at the Santa Crux Test Base. The successful 20 second hot firing test took place on 28 October, with all vehicle components including satellite telemetry in operation. After completion of the testing the vehicle was shipped to the Vandenberg Air Force Base launch site on 31 October.

The THOR booster for the first sentry flight has been completely modified and checked out. It is in the missile assembly building at Vandenberg Air Force Base, ready for mating with the flight test vehicle. The THOR/SENTRY mating will take place in early November and the mated vehicle will be erected for launch stand checkout on 10 Movember. Launch is scheduled for 6 December.

Checkout and acceptance of ground support equipment is proceeding on schedule at Vandenberg Air Force Base. A facilities checkout * vehicle was utilized for checkout of ground support equipment prior to arrival of the first flight article.

Flight test vehicles #3 and #4 are being modified in design as a result of experience gained during systems checkout of flight test vehicles #1 and #2.

The program for development of titanium pressurisation spheres for the SEMTRY propellant pressurisation system has been accelerated because of failures which have occurred in the present fiber glass spheres. Due to lack of experience with titanium, another program will provide for the availability of backup steel spheres if needed.


Radar complexes in unfriendly areas of the world are being plotted for use with the Ferret Subsystem.


The development model of the Visual Reconnaissance Subsystem is scheduled for delivery in November.

Installation and checkout of equipment at the Annette Island and Chiniak, Alaska, satellite tracking and data link stations is slightly behind schedule. However, the stations are expected to be ready for the first SENTRY launch.

The Biomedical Recovery Program components and techniques are being subjected to studies and tests to provide maximum probability of capsule recovery.

CONFIDENTIAL





CONFIDENTIAL

II. TOPICAL SURGIARY

A. FLIGHT TEST PROGRAM


- 1. The first flight test vehicle successfully completed flight readiness testing at Santa Cruz Test Base during September. The vehicle was erected on test stand #1 and subjected to five complete countdown cycles in preparation for the hot firing (Figures 1 & 2). After completion of the five hour countdown the 20 second hot firing was performed without incident on 28 October. A number of minor difficulties in the test instrumentation as well, as a faulty valve in the fuel flow system, were discovered during the countdown.
- 2. All vehicle components were in operation, including the satellite telemetry equipment. Test stand instrumentation data and vehicle telemetry data are being evaluated.
- 3. The vehicle was removed from the test stand and shipped to the launch site at Vandenberg Air Force Base on 31 October.
- 4. The facilities checkout vehicle, which was shipped to the Vandenberg launch site in August, was used for the October checkout and acceptance of launch equipment prior to the arrival of the first flight article. Acceptance of systems checkout equipment, ground support equipment, pad launch equipment, and blockhouse equipment is proceeding on schedule.
- 5. Types of ground support equipment being delivered and accepted at the launch site are shown in Figure 3.
- 6. Major efforts were directed toward insuring the delivery of systems checkout equipment for the airframe, propulsion and auxiliary power subsystem to Vandenberg. The principal items of equipment in this category, which were completed and delivered, included pressurisation and tankage checkout console; propulsion system checkout console; the auxiliary power checkout unit; and the guidance and control checkout console (figures 3 & 4).

B. SATELLITE AIRFRAME SUBSYSTEM

1. THOR 160, the booster for the first SEMIRY launch, was shipped to the Vandenberg launch site on 10 October where it was completely checked out, modified and readied for mating with the SEMIRY satellite. The missile is presently in the missile assembly building at Vandenberg undergoing premate checks. The first THOR/SEMIRY satellite will be mated in early Movember. The THOR/SEMIRY is scheduled to be erected, and launch stand checkout initiated, on 10 November.







- 2. Propulsion test vehicle assembly #4 has been added to the program to replace propulsion test vehicle assembly #2 (PTVA-2), which was irreparably damaged during a hot firing. This new vehicle will be built to the SENTRY/THOR UDMH configuration. Structural drawings for PTVA-4 have been completed and fabrication is underway.
- 3. The design of flight test vehicles #3 and #4 is being modified as necessary, based on information received from the systems checkouts of flight test vehicles #1 and #2.
- 4. The program for development of titanium pressurisation spheres for the SENTRY propellant pressurisation system has been accelerated due to failures under pressurisation of the present fiber glass spheres. Since experience in the use of titanium for pressure spheres is limited, a backup program will provide steel pressure spheres for use on early SENTRY flights if necessary.


C. SATELLITE PROPULSION SYSTEM


- 1. A detailed analysis of recorded test data and an examination of motion pictures has confirmed the cause of the explosion that destroyed the propulsion test vehicle assembly #2 (PTVA-2) originally reported in September. Detonation was caused by JP4 fuel, trapped in a fuel valve from a previous JP4 firing, entering the combustion chamber ahead of the UDMH starting slug. An explosive mixture was formed with the JP4 and the inhibited red fuming nitric acid oxidizer, which detonated when the UDMH was injected. Review of the pre-run preparation procedures established the cause as failure to purge the fuel valve prior to attempting a start.
- 2. Preparation of PTVA-1 was accelerated to permit continuation of the testing program with minimum loss of time. This vehicle, damaged from failure of the fiber glass pressurization sphere (reported in September), was repaired to JP4 configuration and returned to the Santa Cruz Test Base. One additional PTVA is being constructed to UDMH configuration.

D. FERRET RECONNAISSANCE SUBSYSTEM

1. Plots of anticipated radar complexes in the Soviet bloc are being prepared by Haller, Raymond and Brown, Inc., subcontractor to Lockheed Aircraft for the Ferret subsystem. The plots will be used for comparison of the ferret data with known data. The total number of radars in a complex and the function and type of individual radars anticipated are being plotted. The frequency and pulse width of each radar is estimated using this information and the catalogs of known Russian emitters.

CONFIDENTIAL





2. Equipment for the initial ferret subsystem flight is in the pre-production design stage. Environmental testing of the initial structure and electronic components is proceeding satisfactorily. The concept of operation of the Ferret and Visual subsystems is shown in Figure 5.

E. <u>VISUAL RECOMMAISSANCE SUBSYSTEM</u>

1. The developmental model of the airborne portion of the Visual Reconnaissance subsystem is nearing completion and delivery is expected in Hovember. The electronic readout portion of this equipment will be breadboard equipment as the developmental model has not yet satisfied design requirements.


F. COMMINICATION SUBSYSTEM

1. Communication subsystem activities were mostly concerned with installation and checkout of the command and data link equipment at the satellite tracking and data acquisition stations (Figure 6). A complete inspection of the Annette Island and Chiniak Station at Kodiak Island, Alaska, was made in October. Installation and checkout of the stations are behind schedule. However, progress made, and the high morale of the crew indicates the stations may be ready for the 6 December launch. While the inspection party was at Annette Island, crews continued installation of outside equipment over a twenty-four hour period during which eight inches of rain fell.

G. BIOMEDICAL RECOVERY PROGRAM

- 1. Antenna and receiver equipment installation in the C-119 capsule recovery aircraft has been delayed due to receiver shortages. This equipment is designed for homing on the VHF beacon installed in the Biomedical Capsule. Present planning calls for completion of all receiver installations by 8 December. All C-119 capsule recovery aircraft will have receivers installed prior to overseas departure.
- 2. The high G forces resulting from aerial intercept and pickup of the parachute borne biomedical capsule by the C-119 recovery aircraft are being minimized. Mutual adjustment of aircraft speed, the mass of the winch that snags the capsule, and capsule acceleration resulting from aircraft lock-on are being studied to reduce the forces exerted by the recovery operation.
- 3. A study is underway to evaluate the radar target characteristics of one pound of chaff, ejected from the capsule at 50,000 feet. The purpose of the study is to increase the radar reflectance of the capsule and assist in capsule detection by the RC-121 radar tracking aircraft.

CONFIDENTIAL



MDPCR-58-3

5. Water detection tests have been completed to assist in recovery of the biomedical capsule in event aerial recovery is not successful. A VHF homing beacon and flashing light planned for installation on the capsule were detected at a range sufficient to meet test objectives.

H. FACILITIES AND SITES

1. Launch Facilities

Final design of the ATLAS-boosted SENTRY launch complex at Vandenberg Air Force Base will be delayed because of changes in + facility design criteria. Design completion has been rescheduled from 1 November to 15 November. No program delay will result.


2. Assembly Building

Final plans for the guided missile assembly building at Vandenberg are complete. The project will be advertised for construction bids after review and approval of plans. Advertising is scheduled to begin on 7 November. Estimated completion date is 10 October 1959.

3. Tracking, Control Telemetry, and Data Acquisition Facilities

- a. Plans for the permanent station at Vandenberg are complete and will be released to the construction agency on 1 November. Completion of construction is estimated for July 1959.
- b. Additional construction required to complete interim tracking and telemetry facilities at Kaena Point, Oahu Island, Hawaii, was started during September and is progressing on schedule. Construction will be completed in June 1959.







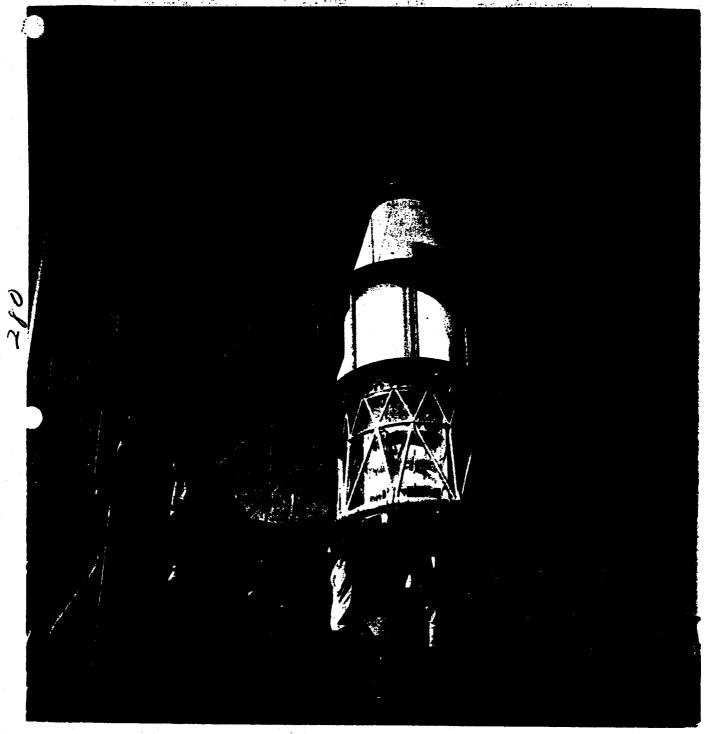


Figure 1. Photo Confidential

Caption Secret

The first 117L flight test vehicle, shown being erected in Test Stand #1 at Santa Cruz Test Base, completed a successful flight readiness firing 28 October. All vehicle components including satellite telemetry equipment were in operation during the 20 second hot firing.

CONFIDENTIAL



(WDPCR-58-3)



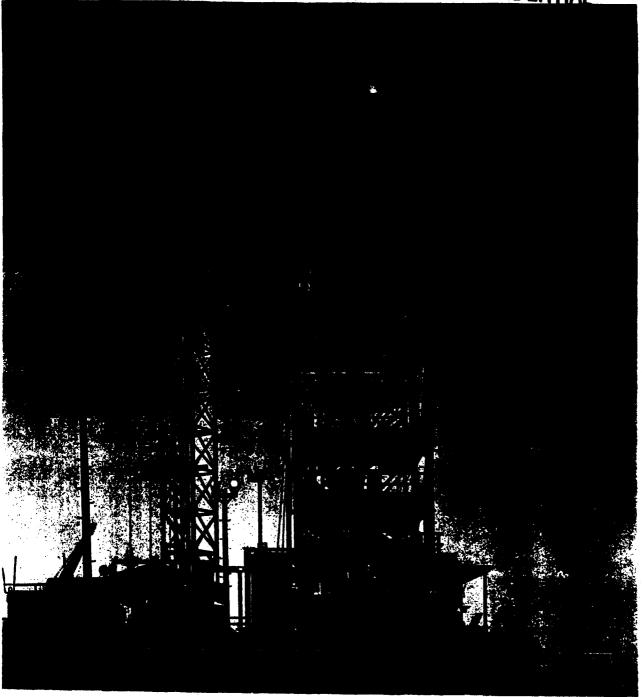


Figure 2. Photo Unclassified

Caption Confidential

Overall view of 117L Test Stand #1, Santa Cruz Test Base. Following a successful flight readiness fixing of the initial 117L flight test vehicle, 28 October, the vehicle was removed from the stand and transported to the Vandenberg Air Force Base launch site, 31 October.

(WDPCR-58-3)

CONFIDENTIAL

WARRIE TOUR

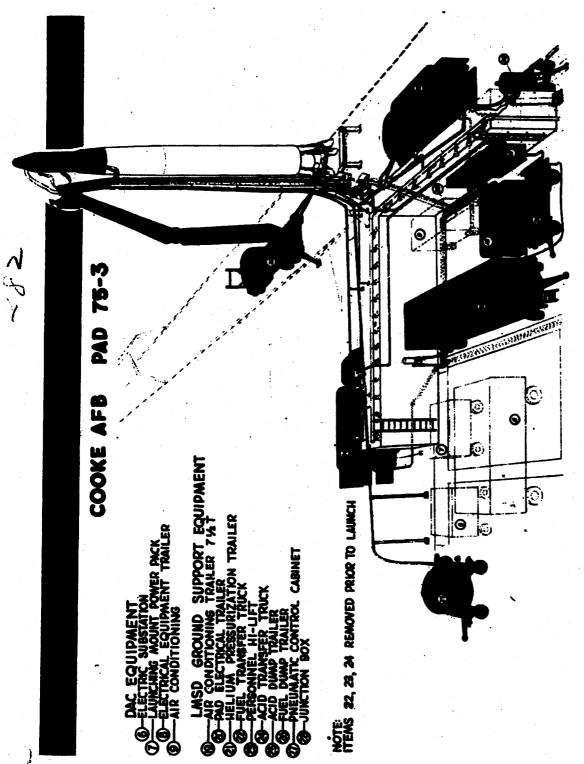



Figure 3. Photo Confidential

Caption Official Use Only

Weapon System 117L launch facility, Pad 75-3, Vandenberg Air Force Base. Typical (WDPCR-58-3) items of ground support equipment, now being delivered and accepted at the launch site, are identified.

CONFIDENTIAL

;

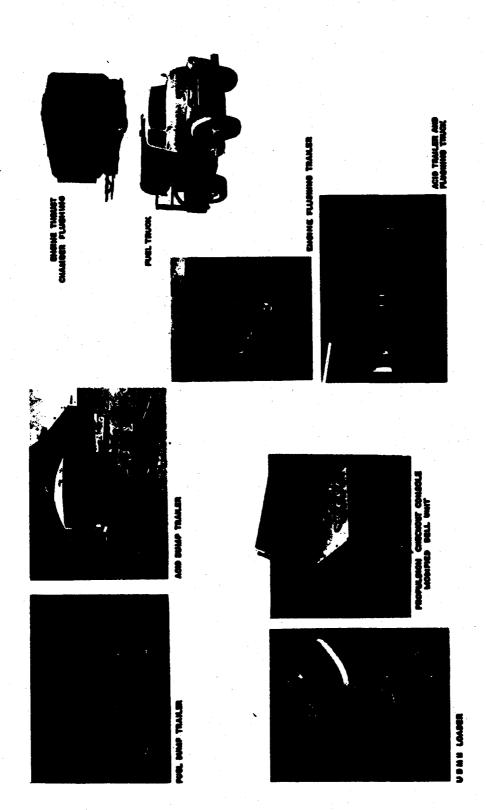

Caption Official Use Only

117L Weapon System ground support equipment. Major efforts are being made toward. delivery of systems checkout equipment to Vandenberg, Air Force Base.

Photo Confidential

Figure 4.

(WDPCR-58-3)

CONFIDENTIAL

3 DEC 1958

VIDZU

(See Teverse side for some & address of others, this letter was sent)

Ar. Amron H. Kats The RAMD Corporation 1700 Main Street Santa Monica, California DOWNGRADED AT 12 YEAR INTERVALS: NOT AUTOMATICALLY DECLASSIFIED. DOD DIR 5200.10

Dear Mr. Kats:

I have asked General Graul and his staff at Rome Air Development Center to have the Special Studies Committee report to me for a temporary period of time in view of nationally important events that concern the WS 117L program. It is n quested that the scope of your deliberations be expended to include recommendations on:

- a. The qualitative aspects of improved sensors.
- b. The utility of presently programed and possible improved sensors and associated methodology to meet stated intelligence needs for the system to repidly report useful data from a changing and videly dispersed group of priority locations.
- requirements,

Major H. F. Wienberg is presently making arrangements to have all necessary information presented to the counittee at your next meeting scheduled for 15 - 16 December at Rome Air Development Center. I indeed hope the counittee will be prepared to submit to me shortly thereafter, the first report sovering progress and recommendations considered necessary to achieve a reliable and timely capability.

Sincerely yours,

B A. SCHRIEVER

This document contains information affecting the National Dutanse of the United States within the meaning of the Escitionage Law 0.12 0; 11 C., Section 793 and 794 his trans all the revelation of its contents in any manner to an unauthorized person is prohibited by laws.

B. A. SCHRIEVER Major General, URAY Commender

> MDZN 58-646 by 1/ of 1/ by

DZ48 dh(25 Hoy 58)

to a rate of the state of the s

Maj Wienberge 274

3 DEC 1958

WDZW

Brig General Donald P. Graul Commander Rome Air Davelopment Center Criffies Air Force Pase, New York

DOWNGRADED AT 12 YEAR INTERVALS: NOT AUTOMATICALLY DECLASSIFIED. DOD DIR 5200.10

Dear General Graul:

I have recently had the opportunity to be briefed on the status and progress of the WS 117L Subsystem I effort for which your Intelligence Laboratory is responsible. I want you to know that I am very pleased with the excellence of the results, the development approach and monner in which the project is being pursued. It was indeed unfortunate that the briefing data conflicted with your scheduled meeting with General Anderson and prevented your attendance.

I am particularly interested in the advisory committee which your people had the foresight to establish. Certain nationally importent events concerning the program make it necessary to master this type of support in back of the over-all WS 1171 progrem, from the point of mission usefulness and the special recommaissance and data processing elements which make it possible to exploit this usefulness.

In view of the urgency of this need, I have requested that Professor Harry Goods have his committee report to me directly for a limited period of time and that the scope of their deliberations include improved sensor systems and utility as well as their integration with the data processing requirements.

Members of my staff have already contacted Mr. Richard Libby, Chicf of the Intelligence Laboratory, and he has enthusiastically offered to have the committee and his staff respond in every way that will best serve the over-all interests of the Air Force.

> Kindest personal regards, ORIGINAL SIGNED? B. A. SCHRIEVER

Copies furnished: Mr. R. Libby, RADC Maj H. F. Wienberg, WDZWS

B. A. SCRRIEVER Major General, USAF Commander

WDZW9

Maj Wienberg

1kg-25 Nov

CONFIE AL

AIR FORCE BALLISTIC MISSILE DIVISION HEADQUARTERS AIR RESEARCH AND DEVELOPMENT COMMAND UNITED STATES AIR FORCE Post COMMON Pers 260

Post Office Box 262 Inglewood, California

WDPCR

10 December 1958

SURJECT: SEMIRY Program Progress Report

for November 1958

TO:

Director

Advanced Research Projects Agency

Washington 25, D.C.

DOWNGRADED AT 12 YEAR INTERVALS; NG: A. (CM.AT;CALLY) DECLASSIFIED. DOD DIR 5200.10

1. This report covers progress in the SEMTRY program during the month of November 1958. Special emphasis has been placed on progress of the first SEMTRY flight, which is scheduled for December.

2. STATUS OF FIRST SENTRY FLIGHT

a. LAURCH DATE

The planned launch date for the first SEMTRY flight has been rescheduled from 6 December to 20 December. The additional time interval will be utilized for more extensive testing of the mated SEMTRY/THOR. This additional testing will improve the probability of achieving a completely successful first flight.

b. BOOSTER

THOR 160, the booster for the first flight, was mated with the facility checkout vehicle on 25 November for compatibility tests. The facility checkout vehicle is a SENTRY flight vehicle configuration containing all components except guidance. The tests will include fueling system, umbilical connections, equipment countdown, and crew training tests. A decision was made to use the facility checkout vehicle instead of the flight test vehicle as reported last month, to spare the flight test vehicle from the wear encountered in the tests. After completion of these tests, in eight to thirteen days, the flight test vehicle will be mated to the booster.

c. FLIGHT TEST VEHICLE

The first flight test vehicle has been inspected and checked out. After a successful systems test on 23 November, the vehicle was declared ready for flight.

CONFIDENTIAL

WDFCR-58-6 Copy 44 of 45 Copies

JUN 11 1959

10



d. GROUND SUPPORT EQUIPMENT

All ground support equipment required for the first flight is in place at Vandenberg Air Force Base. Vehicle and launch pad equipment has been inspected, tested, and is ready for launch. Installation and test of blockhouse launch control and monitoring equipment is virtually completed and will be ready for the first launch.

e. TRACKING AND DATA ACQUISITION FACILITIES (SENTRY/THOR)

Final installation and testing of equipment at the Point Mugn and Vandenberg Air Force Base tracking stations is nearly complete. Tracking tests are underway utilizing aircraft equipped with a SENTRY radio beacon. The Alaskan and Hawaiian stations will have facilities necessary for the first flight available by the lamneh date. The ground communications link between all tracking stations and the control center at Palo Alto is complete and undergoing checkout tests.


f. OBJECTIVES OF FIRST FLIGHT

The primary objective of the first flight is to demonstrate the orbital capability of the SENTRY/THOR configuration. Included are tests of the SEMINY vehicle, the THOR booster, the Ground support equipment, and the ground environment. For this reason the payload aboard the first flight will consist of telementry equipment to provide data concerning vehicle booster performance and environmental conditions within the vehicle, rather than a sensory equipment. Primary test objectives are operational proof of the booster, the ground support equipment, the SEMTRY airframe and adapter, the SEMTRY propulsion system, the SERTRY auxiliary power unit, SERTRY guidance and control systems, and SENTRY telemetry, tracking and command equipment. Secondary test objectives are to obtain SENTRY internal thermal environment data, to prove guidance stabilization of the vehicle on orbit, tests of the interstation communications network, and determination of the attitude and aerodynamic integrity of the SEMIRY/TECR within the limits of optical tracking capability. Tertiary objectives are tests of crew proficiency and ground equipment design from the human engineering point of view. The flight will also exercise recovery operations facilities through use of simulated data handling.


3. GENERAL STATUS OF SENTRY PROGRAMS

a. SUBSISTEM B PROPULSION

(1) SENTRY flight vehicle #2, scheduled for flight in January, successfully completed a 23 second static firing at Santa Cruz Test Base on 20 November (Figures 1, 2, and 3). This vehicle was accepted by the Air Force and shipped to the launch site on 26 November.



WDPUR-58-6





- (2) It has been decided to convert from the JP4 configuration engine to the Unsymstrical Dimethal Hydraxine (UDM) configuration engine on the third SENTRY flight. The resulting increase in engine performance will provide greater program flexibility.
- (3) The preliminary flight rating tests of the UDMI engine configuration were initiated on 15 November and will be completed by 15 January. Two engines are being used for the tests. Initial tests are being conducted at Bell Aircraft Rocket Division due to the heavy workload at Santa Crus Test Base.

b. SUBSYSTEM B - VISUAL RECONNAISSANCE

A formal review of contractor progress in development of Subsystem E components was held on 13-14 November at Rochester, New York. It was concluded that development is proceeding at an acceptable rate. The Airberne components are now being converted from breadboard to airberne configuration. The satellite-borne photo reassembly processor is undergoing test. This component automatically develops the exposed film and prepares the image for transmission to the ground.

C. SUBSYSTEM G - INFRARED RECONNAISSANCE PROGRAM

Recent measurements utilizing high altitude balloons, indicate that a wider spectral band can be incorporated into the design of the infrared reconnaissance payload equipment. Widening the infrared band may permit greater detection range and accuracy in the final equipment.

d. SUBSYSTEM L - BIOMEDICAL RECOVERY CAPSULE

- (1) Tests to refine and validate C-119 mircraft vectoring and aerial pickup techniques were completed during November.
- (2) Radar detection tests of the biomedical recovery capsule parachute were successfully completed. The silvered parachute and associated package can be located by radar at approximately 98 miles range.

e. FLIGHT VEHICLE STATUS

STATUS	NO. OF VEHICLES
Launch Base Santa Cruz Test Base Modification & Checkout Being Assembled	2 0 3



WDPCR-58-6



f. FACILITIES (SEMENY/ATLAS)

- (1) ARPA has authorized and made available 6.7 million dollars for design of construction of the Point Arguelle launch complex. The contract is expected to be let on 19 Becember. Funds for the missile assembly building have not been released by ARPA pending review of siting at Washington level. Facility design plans were completed and turned over to the Corps of Engineers on 10 November. The tracking and data acquisition stations are in deferred status due to non-availability of funds.
- (2) The contract for the permanent tracking and data acquisition station at Vandenberg Air Force Base is expected to be let in mid-December. The Hawkii facility is scheduled for completion in June 1959. The plans for the facility at Fort Stevens, Oregon, are complete; however, no contractual action can be taken due to lack of funds from ARPA. The operational phasing date is in jeopardy due to this delay.
- (3) Design of the tracking and data acquisition station at New Boston, New Hampshire, is sufficiently advanced to permit site preparation. However, lack of funding has prevented site preparation prior to advent of severe winter weather. As a result, the operational phasing date is in serious doubt. The construction season in this area is too short to permit completion of a facility of this magnitude in one season. The architect-engineer for the tracking and data acquisition facility at Ottumwa, Iowa, was selected in November.

Copies furn:

See attached Distribution list

WDPCR-58-6


Beis. GEN.

CONFIDENTIAL

or General. USAF

THE THE THE THE THE

828BB2



SPACE BELOW RESERVED FOR CONMUNICATION CENTER

77

CHÓM.	PRECEDENCE	CE	TYPE M		(Cheek) ACCOUNTING		ORIG. OR REFERS TO		CLASSIFICATI	
ACTION THE	THE REST		BOOK	MULTI 900	900001				OF REFERENCE	
45 0			<u> </u>	1 3	<u> </u>				<u> </u>	
ROM:	4000 /000	A. Tille Incom	, esti	FURN	A	•		SPEC1/	L INSTRUCTI	
Dt .	core, una	, wasting	5, 2.	6.		DOW.	<u> </u>	1	•	
	conside W					DECLASON	GRADED AT			
	CINDDAS OF	THE AND IN				.00/F	GRADED AT 12 S. NOT AUTOMATED. DOD DIR 52	EAR		
	•						GRADED AT 12 S. NOT AUTOMAT ED. DOD DIR 52	40.10 VTTA		
	r- Naces were	19-65-E. P				nick above 1				
: 18										
	H. WALSE ASS			MOTA					•	
								•		
							M DOUBLASS			
								1		
			30 W	1171	. II					
			C Paris		** #	DAMES AS Y	i inti mer.			
		E FLACIO ON	788 2				Maine; see			
				** 74		AND THE \$1	MANAGE OF			
			POS N			III II (T 1				
-		13 912 July		R 18	Pent	ms to Pice	OVER THE SERVE			
			1133 01		الالبترة		I COLOR TENNO	29		
7	<u></u>	and the second second						100	YEAR	
7	200 200 \$100M ;								_	
BYMB				· · · · · ·		SIG	NED		1970	
BYMB	OL NAME AND TITLE				J_L	SIG	NED		_ 1 _	

विश्वाली हिल्ला

16

स्मानिक

(AL) & 1034 (L) - 121 - 1315-15-24 - 40-15-25-16-24. | 155-12. केर ग्रह्मक अंदर्ग

जिल्ला कि ति

195 1 121 Tanger 19

heard-residue of the state (Mice.)

istomagazasas be see y test 16 17 18 11 to 15

THE ASSESSMENT COLOR THE CONTRACTOR

१। मिन्यूनिक्तम् । वह तिल्लान्त्राक्त्र्यक्त्रम् त्यातः त्यातः व्यावस्थानार्थकावेत्रातः वहः सितिः व्यवस्थितस्य १५ राजनां तहार । विद्या कार्याञ्चनात्रका का अर्थाः । विद्यान विविद्यान्ति विद्यान्ति । विद्यान्ति । examental inche inchestinget ners miere miere fineteration from that the enterior the confession of the fine रत्ति वहान्ति। हैं, लिख्डान्तिल्स क्षे प्रस्ति विशेष्ट हो। इन्त्रियद्वित कार्षे विशेषात्रिक क्षेत्र विशेष Loudsides and the using he manner in additionary to extend in this was centures from anymores, of successful actions in the formation was the compartment.

terrocomethon of Rel in the Uk listes (Mig)

softened to the nematic softeness for the bear produced there were at the emponent consider constance to be deserved. The resembles been sententially electrical field for this conference but the presence. her pear merizona en nega hara mos e consammento de mene constituir des माध्य भा । माध्यमान्य का क्रम्बास्त्रमान्य क्रमान्यका क्ष्मा प्रमाणका हिंद साल क्षमा क्रियान्यकः teams designant designant met them them that there are marked in the times included en enterente in con Grandlet in the city (report) thursday (region) in vicinities une descriptions ent une rectant en la comment de la comme Anthrews mortan ear confermant ectation on confermon large her, Courtemanns wite the titler where communical terms his neces like prost is noticed industries endenerginess हते अ**ए भिन्ना** का संबंध <u>भावताल</u>

there concent retains of region heres to there is transfer in the angion of

of respect the project real angles and conservations of the Fieleswicking without a Centiminater that there extende (Bostopher Rabins) to ference that the the Fift theoliens (११.१) यह ताहते अध्यक्त हना को स्तृष्ट हत्रकार विस्तरमानाकार कि द्रामानाकार सेवट विश्व विद्यानाकारणानी तिराम्ह्यान्त्रात्त्रात्त्रेत् सम्ब मात्त्रात्त्रेत् स्थात्त्रात्त्रेत्रात्त्रेत्रेत्त्रात्त्रेत्त्रात्त्रेत्

THE LAND MESSIE LEV. (1970) (Sections)

किरोप्रेशिक्षा मुक्किम्बर्गालकः विक्रमहरूम्बर्गः वर्णस्थानमञ्जान है। त्रारा १९ विक्रमहरूम् विक्रमहरूम् । किर्मह ung errikan eren der erreren der erreren der erreren der erreren erreren der e in compact the of their land, expectedly, there are from a visit responds the their leaving confi ern aufeie ernigen bei ja jage narteinierte jahr minen fanne naug gener er ein au fan gener fen gener fen grant grant grant gener fen grant grant grant gener fen grant gran rang tipea the effer canality the examination of thems and example the forest countries are found and the traditions indistributed used that for a tradition of inscription and their translation of the third and the altari di Lette Laitent agipat. Uhait thefit i fine f eine geftell be fit dette fit fant in fine en felde fit fant e felde feld fen beite felde felde fen beite felde fe



ABMIC. LMSD representatives Mr. Gavalak and Mr. Hitchins are permanently adsigned at ABMIC to work directly with the Douglas and Convair groups in monitoring and coordinating necessary changes. From every indication, Douglas and Convair have agreed on all points and can commence necessary work without further delay. It Colonel Heisler and his assistant Captain Roy, BMD WS 1171 Liaison Office at ABMIC, did a commendable job in coordinating the various visiting groups and committees related to the 1171 test

Lockheed Facilities Requirements: (SECRET)

IMSD submitted a facility brochure on 26 February reflecting land development, buildings, machine tools and test equipment estimated at \$13,000,000. This schedule consolidates all of the 117L functions under one facility with some manufacturing assistance from the Van Muys facility. This increase in floor space and equipment resulted from implementation of the acceleration of the 117L/107A-1 tests and sugmentation of the Thor tests. Delivery or firing rate capabilities are not defined in this presentation.

JAMES S. SEAY

It Colonel, USAF
(hief, WS 117L Branch
Deputy Director/Ballistic Missiles
Directorate/Procurement & Production

CONFIDENTIAL

25 MAR 1958

WDIR

SUBJECT: Request for Technical Intelligence Read-out and Processing Support for WS 117L

TO: Commander
Air Technical Intelligence Center
United States Air Force
Wright-Fatterson Air Force Base, Chio

- 1. Reference is made to your letter of 24 February 1958, subject as above.
- 2. Your requirement for a 12,000 sq. ft. addition to Building 259 at Wright-Patterson Air Force Pase has been included in our Development Plan to support your responsibilities in the WS 117L program. This requirement has been identified as \$300,000 of Military Construction (F-321) Ands in FY 59.
- 3. It is requested that your headquarters prepare the appropriate Forms 161 which should be forwarded to this organization, attention: WDIR, as seen as possible. These will be submitted in turn to Headquarters USAF as a Supplement to the Development Plan constituting your justification for fund allocation purposes.
- 4. Design will be accomplished by the District Engineer in your area through your cognizant Air Force Installations Representative. Design authority will be issued by Headquarters USAF upon their approval of this project.

Copy farmshed: liq USAF, Attn: AFOIE SIGNED

O. J. RITLAND Brig. Gen., USAF Vice Commander

CONTINUE SERVICE